



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2021

Hardware Availability: Jan-2020

Software Availability: Aug-2020

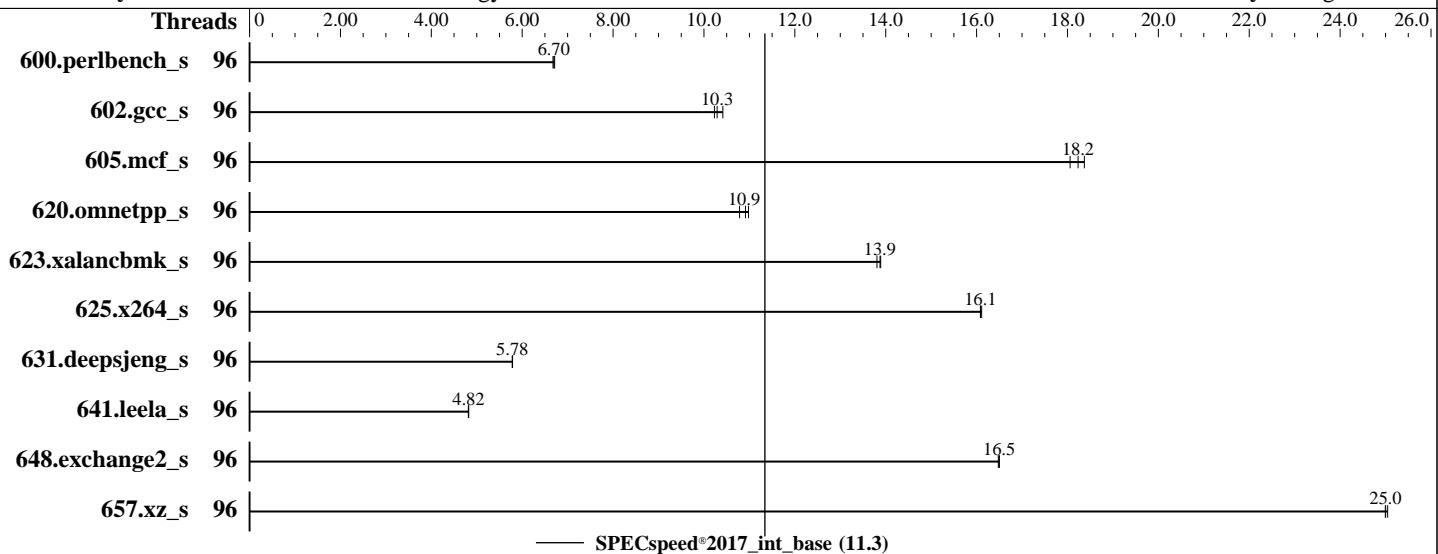

### Hardware

CPU Name: Intel Xeon Platinum 8260  
Max MHz: 3900  
Nominal: 2400  
Enabled: 96 cores, 4 chips  
Orderable: 4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux 8.0 (Ootpa)  
Compiler: Kernel 4.18.0-80.el8.x86\_64  
C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: Lenovo BIOS Version TEE156L 2.61 released May-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	264	6.71	266	6.68	<b>265</b>	<b>6.70</b>							
602.gcc_s	96	382	10.4	<b>387</b>	<b>10.3</b>	389	10.2							
605.mcf_s	96	257	18.4	261	18.1	<b>259</b>	<b>18.2</b>							
620.omnetpp_s	96	149	11.0	<b>149</b>	<b>10.9</b>	151	10.8							
623.xalancbmk_s	96	<b>102</b>	<b>13.9</b>	102	13.9	103	13.8							
625.x264_s	96	<b>110</b>	<b>16.1</b>	109	16.1	110	16.1							
631.deepsjeng_s	96	<b>248</b>	<b>5.78</b>	248	5.79	248	5.78							
641.leela_s	96	<b>354</b>	<b>4.82</b>	354	4.81	354	4.82							
648.exchange2_s	96	178	16.5	<b>178</b>	<b>16.5</b>	178	16.5							
657.xz_s	96	247	25.0	247	25.0	<b>247</b>	<b>25.0</b>							

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

```
/home/cpu2017-1.1.0-ic19.1u2/lib/intel64:/home/cpu2017-1.1.0-ic19.1u2/j
e5.0.1-64"
```

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

### General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from [jemalloc.net](https://github.com/jemalloc/jemalloc/releases) or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
MONITOR/MWAIT set to Enable

Hyper-Threading set to Disable

DCU Streamer Prefetcher set to Disable

Patrol Scrub set to Disable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2017-1.1.0-ic19.lu2/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on localhost.localdomain Mon Jan 4 18:34:39 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
        4 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               96
On-line CPU(s) list: 0-95
Thread(s) per core:  1
Core(s) per socket:  24
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Platform Notes (Continued)

CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz  
Stepping: 7  
CPU MHz: 2279.424  
CPU max MHz: 3900.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4800.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 36608K  
NUMA node0 CPU(s): 0-23  
NUMA node1 CPU(s): 24-47  
NUMA node2 CPU(s): 48-71  
NUMA node3 CPU(s): 72-95  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 36608 KB

From numactl --hardware   WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23  
node 0 size: 386658 MB  
node 0 free: 385926 MB  
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47  
node 1 size: 387066 MB  
node 1 free: 386172 MB  
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71  
node 2 size: 387066 MB  
node 2 free: 386736 MB  
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95  
node 3 size: 387066 MB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Platform Notes (Continued)

```
node 3 free: 386691 MB
node distances:
node  0   1   2   3
 0: 10 21 21 21
 1: 21 10 21 21
 2: 21 21 10 21
 3: 21 21 21 10

From /proc/meminfo
MemTotal:      1585007892 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.0 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.0"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.0:ga

uname -a:
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            No status reported
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):          Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Jan 4 18:30

SPEC is set to: /home/cpu2017-1.1.0-ic19.lu2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   839G  65G  774G   8%  /home
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

BIOS: Lenovo -[TEE156L-2.61]- 05/20/2020  
Vendor: Lenovo  
Product: ThinkSystem SR850P -[7D2HCTO1WW]-  
Product Family: ThinkSystem  
Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base)  
| 625.x264\_s(base) 657.xz\_s(base)

=====

-----

Intel(R) C Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====

C++ | 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
| 641.leela\_s(base)

=====

-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version  
19.1.2.275 Build 20200604  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====

Fortran | 648.exchange2\_s(base)

=====

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.2.275 Build 20200623  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -fnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC\_OPENMP  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -fnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2020.3.275/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512  
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850P  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_int\_base = 11.3

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-mbranches-within-32B-boundaries

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-CLX-I.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-CLX-I.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2021-01-04 05:34:38-0500.

Report generated on 2021-02-08 12:43:58 by CPU2017 PDF formatter v6255.

Originally published on 2021-02-08.