



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate®2017_fp_peak = 213

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

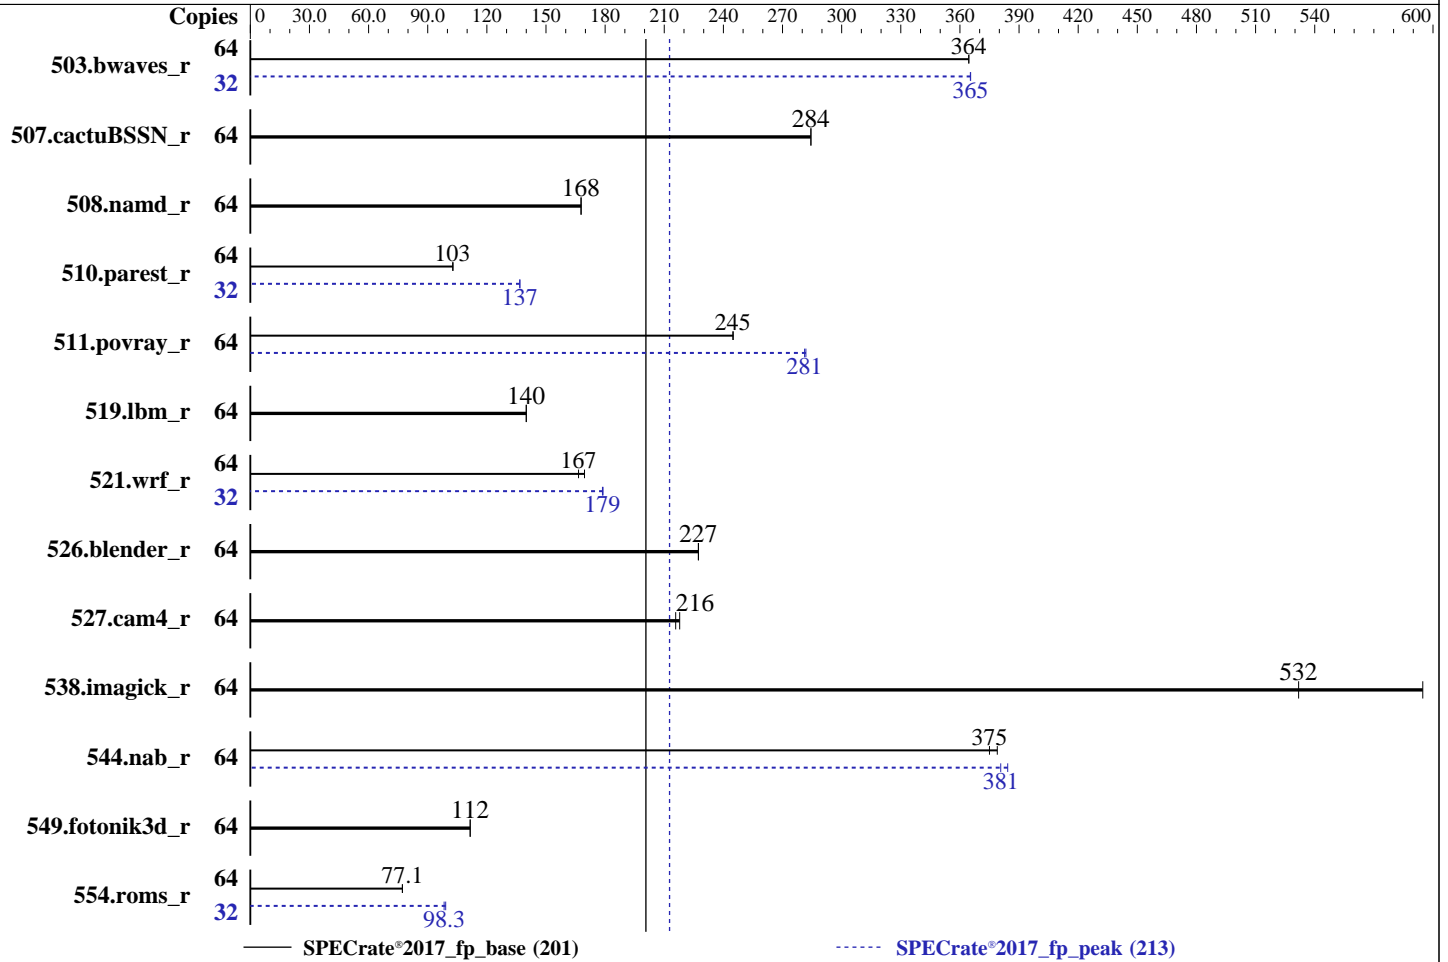

Hardware

CPU Name: Intel Xeon Gold 6314U
 Max MHz: 3400
 Nominal: 2300
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.2 (Ootpa)
 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
 Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler
 Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler
 Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 1.1.3 released Apr-2021
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU[®]2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate[®]2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate[®]2017_fp_peak = 213

CPU2017 License: 55
 Test Sponsor: Dell Inc.
 Tested by: Dell Inc.

Test Date: Jun-2021
 Hardware Availability: Apr-2021
 Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<u>1761</u>	<u>364</u>	1761	365			32	878	365	<u>878</u>	<u>365</u>		
507.cactuBSSN_r	64	<u>285</u>	<u>284</u>	285	284			64	<u>285</u>	<u>284</u>	285	284		
508.namd_r	64	362	168	<u>363</u>	<u>168</u>			64	362	168	<u>363</u>	<u>168</u>		
510.parest_r	64	<u>1631</u>	<u>103</u>	1628	103			32	<u>613</u>	<u>137</u>	612	137		
511.povray_r	64	610	245	<u>610</u>	<u>245</u>			64	530	282	<u>531</u>	<u>281</u>		
519.lbm_r	64	482	140	<u>482</u>	<u>140</u>			64	482	140	<u>482</u>	<u>140</u>		
521.wrf_r	64	846	170	<u>861</u>	<u>167</u>			32	<u>401</u>	<u>179</u>	401	179		
526.blender_r	64	429	227	<u>429</u>	<u>227</u>			64	429	227	<u>429</u>	<u>227</u>		
527.cam4_r	64	514	218	<u>519</u>	<u>216</u>			64	514	218	<u>519</u>	<u>216</u>		
538.imagick_r	64	<u>299</u>	<u>532</u>	268	595			64	<u>299</u>	<u>532</u>	268	595		
544.nab_r	64	<u>287</u>	<u>375</u>	284	379			64	280	384	<u>283</u>	<u>381</u>		
549.fotonik3d_r	64	2236	112	<u>2236</u>	<u>112</u>			64	2236	112	<u>2236</u>	<u>112</u>		
554.roms_r	64	1318	77.2	<u>1318</u>	<u>77.1</u>			32	513	99.1	<u>517</u>	<u>98.3</u>		

SPECrate[®]2017_fp_base = 201

SPECrate[®]2017_fp_peak = 213

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/je5.0.1-64"
MALLOCONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate®2017_fp_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Sub NUMA Cluster : 2-Way Clustering

Virtualization Technology : Disabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C States : Autonomous

Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance

CPU Interconnect Bus Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-ic2021.1/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost.localdomain Mon Jun 7 23:26:23 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6314U CPU @ 2.30GHz

1 "physical id"s (chips)

(Continued on next page)



SPEC CPU® 2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate®2017_fp_peak = 213

CPU2017 License: 55
 Test Sponsor: Dell Inc.
 Tested by: Dell Inc.

Test Date: Jun-2021
 Hardware Availability: Apr-2021
 Software Availability: Dec-2020

Platform Notes (Continued)

64 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
          25 26 27 28 29 30 31
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             1
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 106
Model name:            Intel(R) Xeon(R) Gold 6314U CPU @ 2.30GHz
Stepping:              6
CPU MHz:               2925.161
BogoMIPS:              4600.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              49152K
NUMA node0 CPU(s):    0-15,32-47
NUMA node1 CPU(s):    16-31,48-63
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtcs64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid md_clear pconfig flush_lld arch_capabilities
```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201
SPECrate®2017_fp_peak = 213

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

cache size : 49152 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 32 33 34 35 36 37 38 39 40 41 42 43
44 45 46 47
node 0 size: 257407 MB
node 0 free: 231017 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
node 1 size: 258038 MB
node 1 free: 245484 MB
node distances:
node  0  1
  0:  10  11
  1:  11  10
```

From /proc/meminfo
MemTotal: 527816924 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active
Current active profile: throughput-performance

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit): Not affected

(Continued on next page)



SPEC CPU[®]2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate[®]2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate[®]2017_fp_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Jun 7 17:57

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-ic2021.1  
Filesystem   Type  Size  Used Avail Use% Mounted on  
tmpfs         tmpfs 125G   33G   93G   26% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id  
Vendor:          Dell Inc.  
Product:         PowerEdge C6520  
Product Family: PowerEdge  
Serial:          SDPT078
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x 00AD063200AD HMAA8GR7AJR4N-XN 64 GB 2 rank 3200  
8x Not Specified Not Specified
```

BIOS:

```
BIOS Vendor:    Dell Inc.  
BIOS Version:   1.1.3  
BIOS Date:      04/27/2021  
BIOS Revision:  1.1
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
```

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate®2017_fp_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

| 544.nab_r(base, peak)

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 511.povray_r(peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 511.povray_r(base) 526.blender_r(base, peak)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 511.povray_r(peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----
```

(Continued on next page)



SPEC CPU[®]2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate[®]2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate[®]2017_fp_peak = 213

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
554.roms_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate®2017_fp_peak = 213

CPU2017 License: 55

Test Date: Jun-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base) 527.cam4_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

(Continued on next page)



SPEC CPU® 2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate®2017_fp_peak = 213

CPU2017 License: 55

Test Date: Jun-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate®2017_fp_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
521.wrf_r: ifort icc
```

```
527.cam4_r: ifort icx
```

Benchmarks using both C and C++:

(Continued on next page)



SPEC CPU[®]2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate[®]2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate[®]2017_fp_peak = 213

CPU2017 License: 55

Test Date: Jun-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

511.povray_r: icpc icc

526.blender_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU[®]2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate[®]2017_fp_base = 201

PowerEdge C6520 (Intel Xeon Gold 6314U, 2.30 GHz)

SPECrate[®]2017_fp_peak = 213

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Apr-2021

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.7 on 2021-06-07 23:26:20-0400.

Report generated on 2021-07-08 13:42:22 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-06.