



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Jun-2021

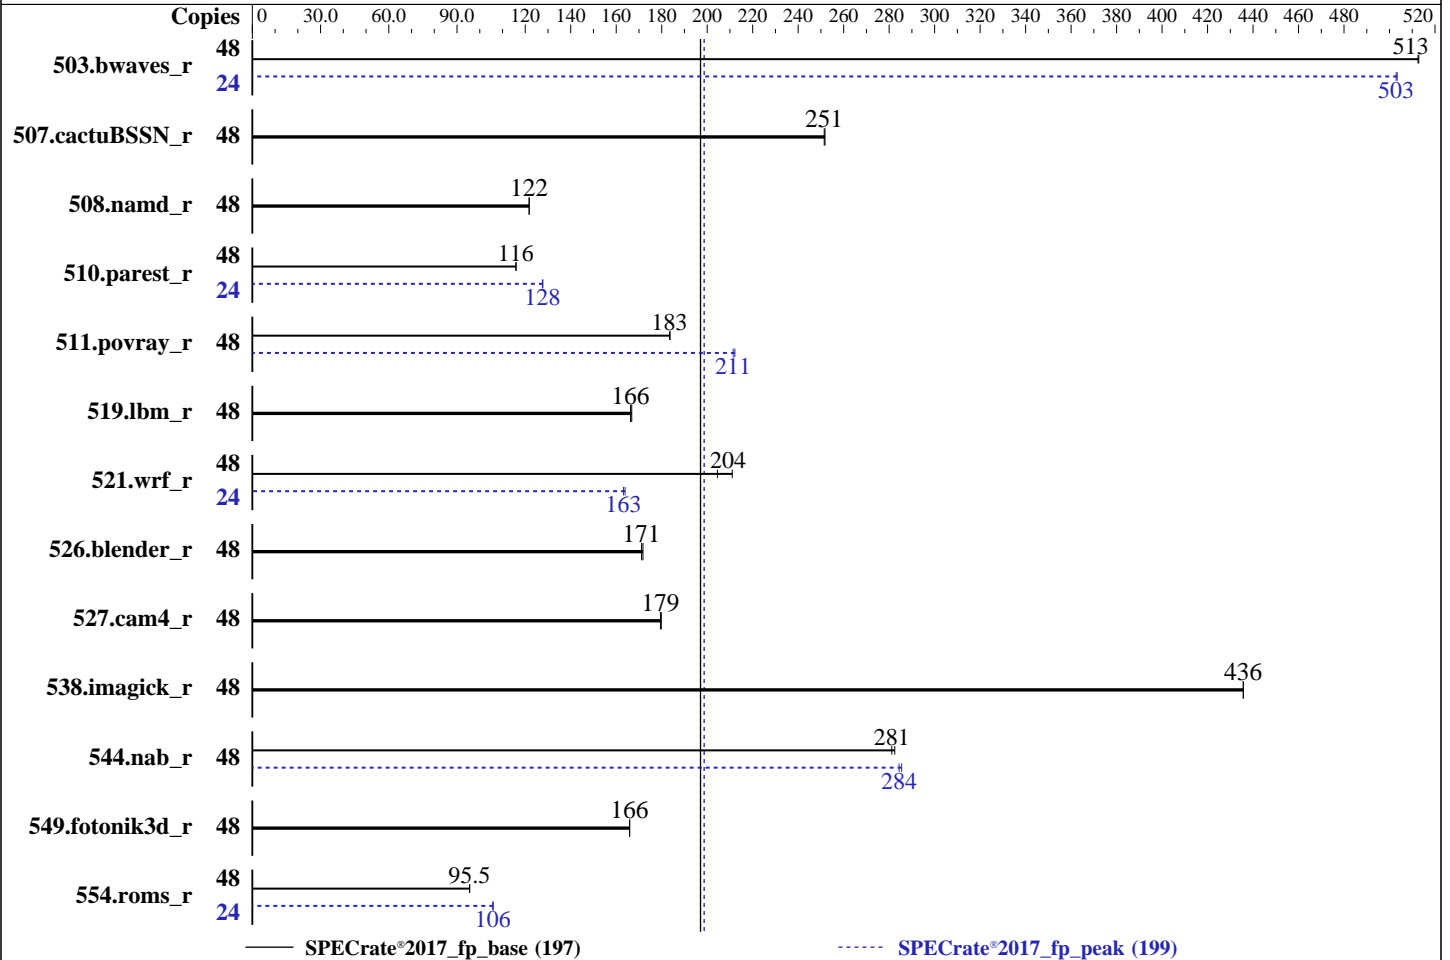

### Hardware

CPU Name: Intel Xeon Silver 4310  
 Max MHz: 3300  
 Nominal: 2100  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (4 x 32 GB 2Rx4 PC4-3200AA-R; 12 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)  
 Storage: 512 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa) 4.18.0-305.7.1.el8\_4.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 1.2.1 released May-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Aug-2021  
Hardware Availability: Jul-2021  
Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	939	513	<b><u>939</u></b>	<b><u>513</u></b>			24	<b><u>479</u></b>	<b><u>503</u></b>	478	503		
507.cactuBSSN_r	48	241	252	<b><u>242</u></b>	<b><u>251</u></b>			48	241	252	<b><u>242</u></b>	<b><u>251</u></b>		
508.namd_r	48	375	122	<b><u>375</u></b>	<b><u>122</u></b>			48	375	122	<b><u>375</u></b>	<b><u>122</u></b>		
510.parest_r	48	1082	116	<b><u>1084</u></b>	<b><u>116</u></b>			24	<b><u>492</u></b>	<b><u>128</u></b>	491	128		
511.povray_r	48	<b><u>611</u></b>	<b><u>183</u></b>	610	184			48	528	212	<b><u>530</u></b>	<b><u>211</u></b>		
519.lbm_r	48	<b><u>304</u></b>	<b><u>166</u></b>	303	167			48	<b><u>304</u></b>	<b><u>166</u></b>	303	167		
521.wrf_r	48	510	211	<b><u>526</u></b>	<b><u>204</u></b>			24	<b><u>329</u></b>	<b><u>163</u></b>	328	164		
526.blender_r	48	<b><u>427</u></b>	<b><u>171</u></b>	426	172			48	<b><u>427</u></b>	<b><u>171</u></b>	426	172		
527.cam4_r	48	<b><u>468</u></b>	<b><u>179</u></b>	467	180			48	<b><u>468</u></b>	<b><u>179</u></b>	467	180		
538.imagick_r	48	274	436	<b><u>274</u></b>	<b><u>436</u></b>			48	274	436	<b><u>274</u></b>	<b><u>436</u></b>		
544.nab_r	48	<b><u>287</u></b>	<b><u>281</u></b>	286	282			48	283	286	<b><u>284</u></b>	<b><u>284</u></b>		
549.fotonik3d_r	48	1127	166	<b><u>1128</u></b>	<b><u>166</u></b>			48	1127	166	<b><u>1128</u></b>	<b><u>166</u></b>		
554.roms_r	48	<b><u>799</u></b>	<b><u>95.5</u></b>	798	95.6			24	360	106	<b><u>361</u></b>	<b><u>106</u></b>		

SPECrate®2017\_fp\_base = **197**

SPECrate®2017\_fp\_peak = **199**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Jun-2021

## General Notes (Continued)

Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 512 GB ramdisk created with the cmd: "mount -t tmpfs -o size=512G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Sub NUMA Cluster : 2-Way Clustering

Virtualization Technology : Disabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C States : Autonomous

Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance

CPU Interconnect Bus Link

Power Management : Disabled

PCI ASPM L1 Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2021.1/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on R750xs.9xbztd3.inside.dell.com Mon Aug 23 14:32:14 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Jun-2021

## Platform Notes (Continued)

2 "physical id"s (chips)  
48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:    2
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):         4
Vendor ID:            GenuineIntel
BIOS Vendor ID:       Intel
CPU family:            6
Model:                106
Model name:           Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz
BIOS Model name:      Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz
Stepping:             6
CPU MHz:              2612.805
BogoMIPS:             4200.00
Virtualization:       VT-x
L1d cache:            48K
L1i cache:            32K
L2 cache:             1280K
L3 cache:             18432K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46
NUMA node2 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbinvd
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Jun-2021

### Platform Notes (Continued)

```
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
flush_llc arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 18432 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 128159 MB
node 0 free: 118667 MB
node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 1 size: 129021 MB
node 1 free: 123866 MB
node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 2 size: 129021 MB
node 2 free: 117590 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 128981 MB
node 3 free: 121251 MB
node distances:
node  0  1  2  3
 0:  10  11  20  20
 1:  11  10  20  20
 2:  20  20  10  11
 3:  20  20  11  10
```

From /proc/meminfo

```
MemTotal:      527547876 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2021

Hardware Availability: Jul-2021

Software Availability: Jun-2021

### Platform Notes (Continued)

```
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

uname -a:

```
Linux R750xs.9xbztd3.inside.dell.com 4.18.0-305.7.1.el8_4.x86_64 #1 SMP Mon Jun 14
17:25:42 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 23 09:12

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2021.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	512G	27G	486G	6%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

```
Vendor: Dell Inc.
Product: PowerEdge R750xs
Product Family: PowerEdge
Serial: 9XBZTD3
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
12x 002C069D002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200, configured at 2666
4x 00AD063200AD HMA84GR7DJR4N-XN 32 GB 2 rank 3200, configured at 2666
```

BIOS:

BIOS Vendor: Dell Inc.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Aug-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Jun-2021

## Platform Notes (Continued)

BIOS Version: 1.2.1  
BIOS Date: 05/28/2021  
BIOS Revision: 1.2

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Aug-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Jun-2021

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Aug-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Jun-2021

## Compiler Version Notes (Continued)

Fortran, C | 521.wrf\_r(peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Jun-2021

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-mbranches-within-32B-boundaries -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Jun-2021

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Jun-2021

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpc icc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Jun-2021

## Peak Optimization Flags (Continued)

510.parest\_r (continued):

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.html>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R750xs (Intel Xeon Silver 4310, 2.10 GHz)

SPECrate®2017\_fp\_base = 197

SPECrate®2017\_fp\_peak = 199

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Aug-2021

**Hardware Availability:** Jul-2021

**Software Availability:** Jun-2021

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-23 15:32:14-0400.

Report generated on 2021-09-17 13:51:15 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-17.