



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Mar-2022

Software Availability: Jun-2021

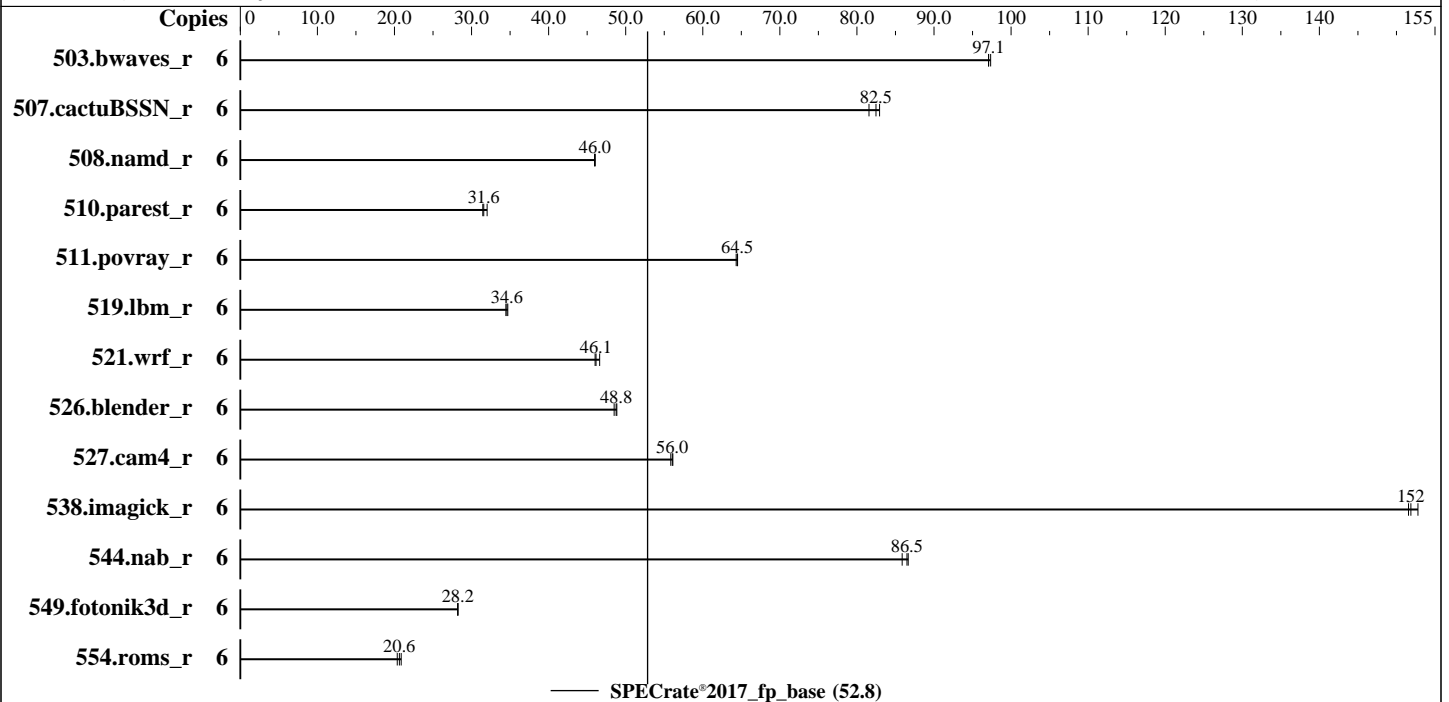

Hardware

CPU Name: Intel Xeon E-2356G
 Max MHz: 5000
 Nominal: 3200
 Enabled: 6 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-3200AA-E)
 Storage: 1 x SATA M.2 SSD, 480GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.22 R1.30.0 for D3931-C1x. Released Mar-2022 tested as V5.0.0.22 R1.15.0 for D3931-C1x Dec-2021
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	6	618	97.3	620	97.1	620	97.1							
507.cactuBSSN_r	6	92.1	82.5	93.1	81.6	91.6	82.9							
508.namd_r	6	124	46.0	124	46.0	124	46.0							
510.parest_r	6	499	31.5	497	31.6	490	32.0							
511.povray_r	6	217	64.5	218	64.3	217	64.5							
519.lbm_r	6	182	34.7	183	34.6	184	34.5							
521.wrf_r	6	288	46.6	292	46.0	291	46.1							
526.blender_r	6	188	48.5	187	48.8	187	48.8							
527.cam4_r	6	187	56.0	187	56.1	188	55.8							
538.imagick_r	6	97.7	153	98.3	152	98.5	152							
544.nab_r	6	118	85.9	117	86.5	117	86.7							
549.fotonik3d_r	6	828	28.2	829	28.2	829	28.2							
554.roms_r	6	468	20.4	457	20.9	462	20.6							

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo madvise > /sys/kernel/mm/transparent_hugepage/enabled
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
    "/home/PVT/speccpu-1.1.8_ic2021.1_b/lib/intel64:/home/PVT/speccpu-1.1.8_
    ic2021.1_b/je5.0.1-64"
MALLOCONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

General Notes (Continued)

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Hyper Threading = Disabled
C-States Auto Demotion = Disabled
C-States Un Demotion = Disabled
DDR Speed Control = Auto
DMI Gen3 ASPM = ASPM L0s
FAN Control = Full

Sysinfo program /home/PVT/speccpu-1.1.8_ic2021.1_b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on sles15sp3 Tue Dec 14 17:28:15 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2356G CPU @ 3.20GHz
1 "physical id"s (chips)
6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5

From lscpu from util-linux 2.36.2:
Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Platform Notes (Continued)

```

CPU op-mode(s):          32-bit, 64-bit
Byte Order:              Little Endian
Address sizes:          39 bits physical, 48 bits virtual
CPU(s):                 6
On-line CPU(s) list:    0-5
Thread(s) per core:     1
Core(s) per socket:     6
Socket(s):              1
NUMA node(s):          1
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  167
Model name:             Intel(R) Xeon(R) E-2356G CPU @ 3.20GHz
Stepping:               1
CPU MHz:                 1006.616
CPU max MHz:            5000.0000
CPU min MHz:            800.0000
BogoMIPS:               6384.00
Virtualization:         VT-x
L1d cache:              288 KiB
L1i cache:              192 KiB
L2 cache:               3 MiB
L3 cache:               12 MiB
NUMA node0 CPU(s):     0-5
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpeltb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault ept invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Platform Notes (Continued)

vpclmulqdg avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear flush_l1d arch_capabilities

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	512K	3M	8	Unified	2	1024	1	64
L3	12M	12M	16	Unified	3	12288	1	64

/proc/cpuinfo cache data
cache size : 12288 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 31513 MB
node 0 free: 30692 MB
node distances:
node 0
0: 10

From /proc/meminfo

MemTotal: 32269792 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave

From /etc/*release* /etc/*version*

os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:

Linux sles15sp3 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021
(ba3c2e9/lp-5d9e8aa) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Dec 14 17:18

```
SPEC is set to: /home/PVT/speccpu-1.1.8_ic2021.1_b
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   365G   30G  336G   9% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY TX1310 M5
Product Family: SERVER
Serial:         xxxxxxxxxxxx
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  2x Samsung M391A2K43DB1-CWE 16 GB 2 rank 3200
```

```
BIOS:
  BIOS Vendor:    FUJITSU // American Megatrends International, LLC.
  BIOS Version:   V5.0.0.22 R1.15.0 for D3931-C1x
  BIOS Date:      12/03/2021
  BIOS Revision:  1.15
```

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Compiler Version Notes (Continued)

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Dec-2021
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1310 M5 (D3931-C100), Intel Xeon E-2356G, 3.20GHz

SPECrate®2017_fp_base = 52.8

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Mar-2022

Software Availability: Jun-2021

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevC.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevC.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-14 03:28:15-0500.

Report generated on 2022-01-18 18:57:14 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-18.