



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_base = 30.8

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2022
Hardware Availability: Apr-2022
Software Availability: May-2021

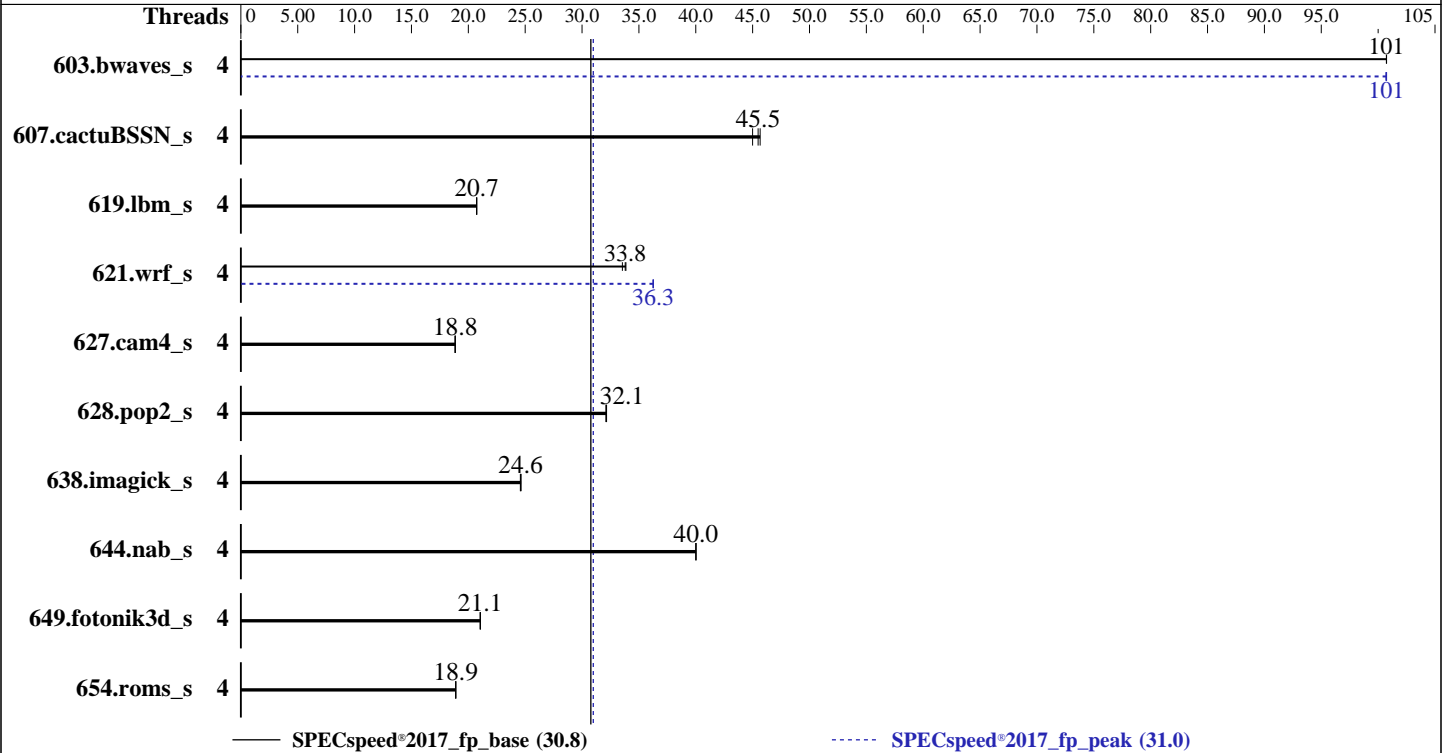

Hardware

CPU Name: Intel Xeon E-2314
Max MHz: 4500
Nominal: 2800
Enabled: 4 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 8 MB I+D on chip per chip
Other: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-3200AA-E, running at 2933)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)
Kernel 4.18.0-305.el8.x86_64
Compiler: Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel: Yes
Firmware: Lenovo BIOS Version TQE103F 1.01 released Mar-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECSpeed®2017_fp_base = 30.8

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECSpeed®2017_fp_peak = 31.0

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2022
Hardware Availability: Apr-2022
Software Availability: May-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	4	586	101	586	101	586	101	4	586	101	586	101	586	101
607.cactuBSSN_s	4	370	45.0	367	45.5	365	45.7	4	370	45.0	367	45.5	365	45.7
619.lbm_s	4	253	20.7	253	20.7	253	20.7	4	253	20.7	253	20.7	253	20.7
621.wrf_s	4	391	33.8	394	33.5	391	33.9	4	365	36.2	365	36.3	365	36.3
627.cam4_s	4	470	18.8	470	18.9	470	18.8	4	470	18.8	470	18.9	470	18.8
628.pop2_s	4	370	32.1	369	32.2	370	32.1	4	370	32.1	369	32.2	370	32.1
638.imagick_s	4	587	24.6	586	24.6	585	24.6	4	587	24.6	586	24.6	585	24.6
644.nab_s	4	437	40.0	437	40.0	437	40.0	4	437	40.0	437	40.0	437	40.0
649.fotonik3d_s	4	433	21.1	433	21.1	433	21.1	4	433	21.1	433	21.1	433	21.1
654.roms_s	4	833	18.9	834	18.9	833	18.9	4	833	18.9	834	18.9	833	18.9

SPECSpeed®2017_fp_base = **30.8**

SPECSpeed®2017_fp_peak = **31.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic202
1.1-revB/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages disabled by default
echo never > /sys/kernel/mm/transparent_hugepage/enabled
echo never > /sys/kernel/mm/transparent_hugepage/defrag
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 30.8

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2022
Hardware Availability: Apr-2022
Software Availability: May-2021

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Legacy

Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Fri Apr 29 19:15:38 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2314 CPU @ 2.80GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

From lscpu from util-linux 2.32.1:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 4

On-line CPU(s) list: 0-3

Thread(s) per core: 1

Core(s) per socket: 4

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

BIOS Vendor ID: Intel(R) Corporation

CPU family: 6

Model: 167

Model name: Intel(R) Xeon(R) E-2314 CPU @ 2.80GHz

BIOS Model name: Intel(R) Xeon(R) E-2314 CPU @ 2.80GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 30.8

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2022
Hardware Availability: Apr-2022
Software Availability: May-2021

Platform Notes (Continued)

```
Stepping: 1
CPU MHz: 3556.395
BogoMIPS: 5616.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 512K
L3 cache: 8192K
NUMA node0 CPU(s): 0-3
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx
smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear
flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 8192 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64327 MB
node 0 free: 63654 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65871316 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_base = 30.8

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2022
Hardware Availability: Apr-2022
Software Availability: May-2021

Platform Notes (Continued)

```
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Apr 29 19:13
```

```
SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   790G  103G  688G  13% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR250 V2
Product Family: ThinkSystem
Serial:          1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 30.8

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2022
Hardware Availability: Apr-2022
Software Availability: May-2021

Platform Notes (Continued)

Memory:

4x SK Hynix HMA82GU7DJR8N-XN 16 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: Lenovo
BIOS Version: TQE103F-1.01
BIOS Date: 03/17/2022
BIOS Revision: 1.1
Firmware Revision: 1.95

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
644.nab_s(base, peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 30.8

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2022
Hardware Availability: Apr-2022
Software Availability: May-2021

Compiler Version Notes (Continued)

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
=====

```

```

-----
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----

```

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 30.8

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2022

Hardware Availability: Apr-2022

Software Availability: May-2021

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 30.8

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2022

Hardware Availability: Apr-2022

Software Availability: May-2021

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX2
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-RocketB-A.html>

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-RocketB-A.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250 V2
(2.80 GHz, Intel Xeon E-2314)

SPECspeed®2017_fp_base = 30.8

SPECspeed®2017_fp_peak = 31.0

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2022

Hardware Availability: Apr-2022

Software Availability: May-2021

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-29 07:15:38-0400.
Report generated on 2022-05-25 13:13:49 by CPU2017 PDF formatter v6442.
Originally published on 2022-05-24.