



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

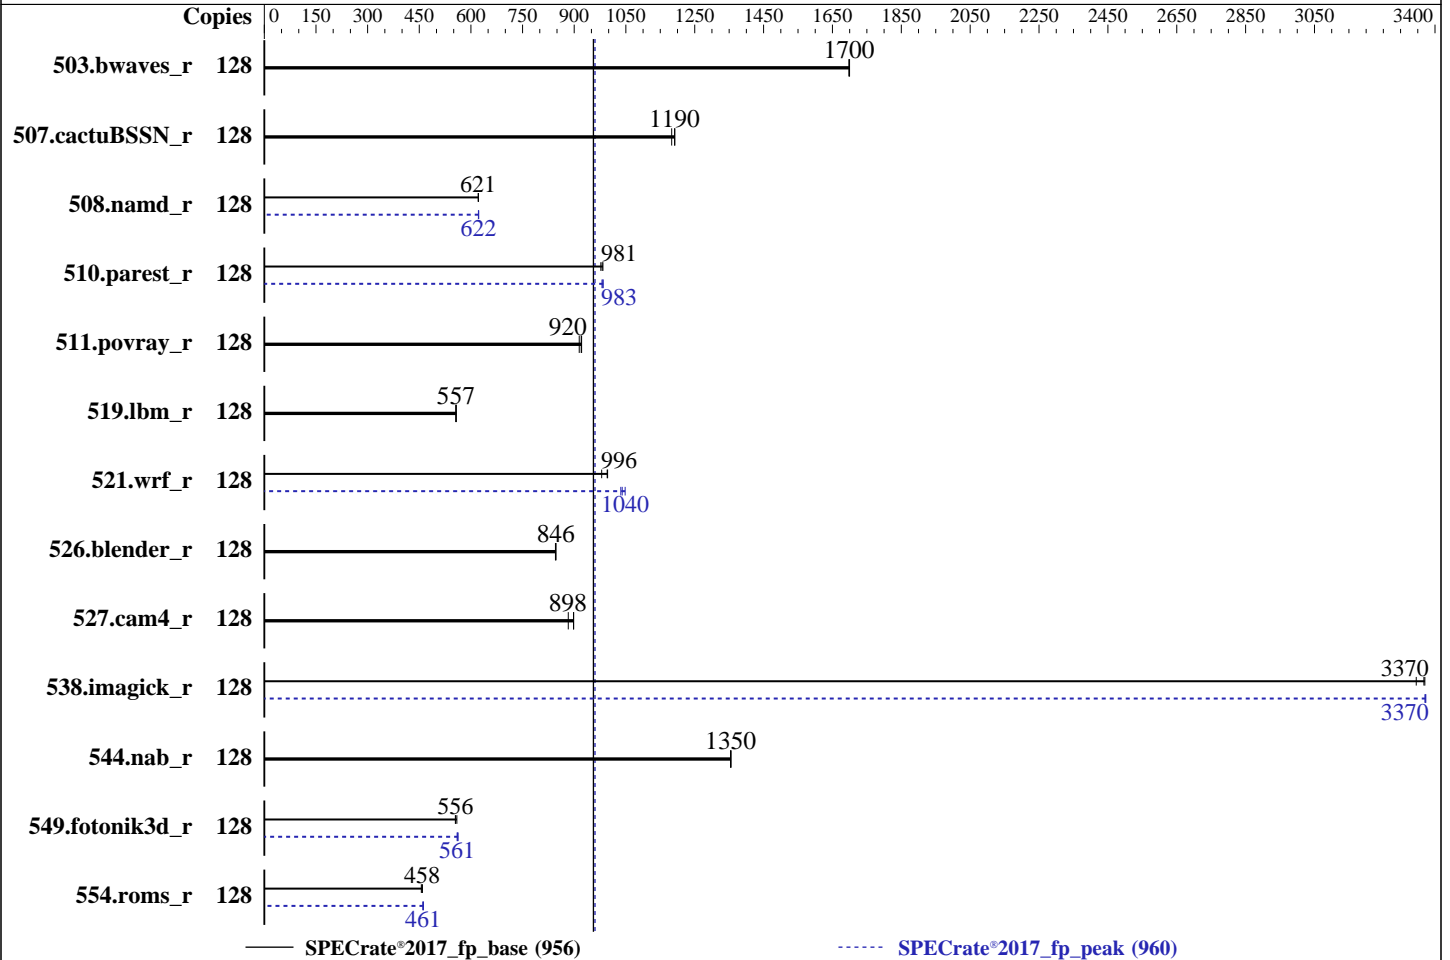

### Hardware

CPU Name: AMD EPYC 9374F  
 Max MHz: 4300  
 Nominal: 3850  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 4 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version KAE105F 1.20 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<b><u>756</u></b>	<b><u>1700</u></b>	755	1700	756	1700	128	<b><u>756</u></b>	<b><u>1700</u></b>	755	1700	756	1700
507.cactuBSSN_r	128	<b><u>136</u></b>	<b><u>1190</u></b>	137	1180	136	1190	128	<b><u>136</u></b>	<b><u>1190</u></b>	137	1180	136	1190
508.namd_r	128	<b><u>196</u></b>	<b><u>621</u></b>	196	621	195	622	128	196	622	<b><u>195</u></b>	<b><u>622</u></b>	195	623
510.parest_r	128	<b><u>341</u></b>	<b><u>981</u></b>	340	983	343	977	128	<b><u>341</u></b>	<b><u>983</u></b>	341	981	340	984
511.povray_r	128	<b><u>325</u></b>	<b><u>920</u></b>	324	922	327	915	128	<b><u>325</u></b>	<b><u>920</u></b>	324	922	327	915
519.lbm_r	128	242	557	<b><u>242</u></b>	<b><u>557</u></b>	243	556	128	242	557	<b><u>242</u></b>	<b><u>557</u></b>	243	556
521.wrf_r	128	288	997	<b><u>288</u></b>	<b><u>996</u></b>	293	980	128	<b><u>276</u></b>	<b><u>1040</u></b>	277	1040	274	1050
526.blender_r	128	231	845	<b><u>230</u></b>	<b><u>846</u></b>	230	847	128	231	845	<b><u>230</u></b>	<b><u>846</u></b>	230	847
527.cam4_r	128	<b><u>249</u></b>	<b><u>898</u></b>	254	883	249	899	128	<b><u>249</u></b>	<b><u>898</u></b>	254	883	249	899
538.imagick_r	128	94.4	3370	95.2	3350	<b><u>94.5</u></b>	<b><u>3370</u></b>	128	94.4	3370	94.4	3370	<b><u>94.4</u></b>	<b><u>3370</u></b>
544.nab_r	128	<b><u>159</u></b>	<b><u>1350</u></b>	159	1350	159	1360	128	<b><u>159</u></b>	<b><u>1350</u></b>	159	1350	159	1360
549.fotonik3d_r	128	892	559	899	555	<b><u>898</u></b>	<b><u>556</u></b>	128	890	560	886	563	<b><u>890</u></b>	<b><u>561</u></b>
554.roms_r	128	<b><u>444</u></b>	<b><u>458</u></b>	443	459	446	456	128	<b><u>441</u></b>	<b><u>461</u></b>	442	461	440	462

SPECrate®2017\_fp\_base = **956**

SPECrate®2017\_fp\_peak = **960**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 956

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_peak = 960

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.8-amd-aocc400-genoa-Blb/amd_rate_aocc400_genoa_B_lib/  
    lib:/home/cpu2017-1.1.8-amd-aocc400-genoa-Blb/amd_rate_aocc400_genoa_B_l  
    ib/lib32:"  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-Blb/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Fri Dec 9 05:53:13 2022
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

From /proc/cpuinfo

```
model name : AMD EPYC 9374F 32-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 10 11 16 17 18 19 24 25 26 27 32 33 34 35 40 41 42 43 48
49 50 51 56 57 58 59
physical 1: cores 0 1 2 3 10 11 16 17 18 19 24 25 26 27 32 33 34 35 40 41 42 43 48
49 50 51 56 57 58 59
```

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9374F 32-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 4304.9312
CPU min MHz: 1500.0000
BogoMIPS: 7688.46
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 956

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_peak = 960

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

```

Virtualization:          AMD-V
L1d cache:              2 MiB (64 instances)
L1i cache:              2 MiB (64 instances)
L2 cache:               64 MiB (64 instances)
L3 cache:               512 MiB (16 instances)
NUMA node(s):          8
NUMA node0 CPU(s):     0-7,64-71
NUMA node1 CPU(s):     8-15,72-79
NUMA node2 CPU(s):     16-23,80-87
NUMA node3 CPU(s):     24-31,88-95
NUMA node4 CPU(s):     32-39,96-103
NUMA node5 CPU(s):     40-47,104-111
NUMA node6 CPU(s):     48-55,112-119
NUMA node7 CPU(s):     56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

`/proc/cpuinfo` cache data  
cache size : 1024 KB

From `numactl --hardware`

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 193147 MB
node 0 free: 191821 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 193519 MB
node 1 free: 193200 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

node 2 size: 193519 MB
node 2 free: 193189 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 193519 MB
node 3 free: 193251 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 193519 MB
node 4 free: 193152 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 193519 MB
node 5 free: 193201 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 193519 MB
node 6 free: 193249 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 193287 MB
node 7 free: 193037 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal:      1584695484 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 956

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_peak = 960

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

uname -a:

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Dec 9 05:51

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-Blb

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	446G	31G	416G	7%	/

From /sys/devices/virtual/dmi/id

```
Vendor:          Lenovo
Product:         ThinkSystem SR665 V3 MB,Genoa,Kauai,DDR5,Kauai,2U
Product Family: ThinkSystem
Serial:          1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x SK Hynix HMC94AEBRA102N 64 GB 2 rank 4800

BIOS:

```
BIOS Vendor:     Lenovo
BIOS Version:    KAE105F-1.20
BIOS Date:       12/01/2022
BIOS Revision:   1.20
Firmware Revision: 1.20
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 956

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017

**Test Date:** Dec-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2022

### Compiler Version Notes (Continued)

```

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

```

```

=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

```

```

=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

```

### Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -lamdlibm -lamdalloc -lflang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

### C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

### Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

### Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

### Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

### Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

```
538.imagick_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

544.nab\_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(3.85 GHz,AMD EPYC 9374F)

SPECrate®2017\_fp\_base = 956

SPECrate®2017\_fp\_peak = 960

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-08 16:53:13-0500.

Report generated on 2023-01-17 18:41:23 by CPU2017 PDF formatter v6442.

Originally published on 2023-01-17.