



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

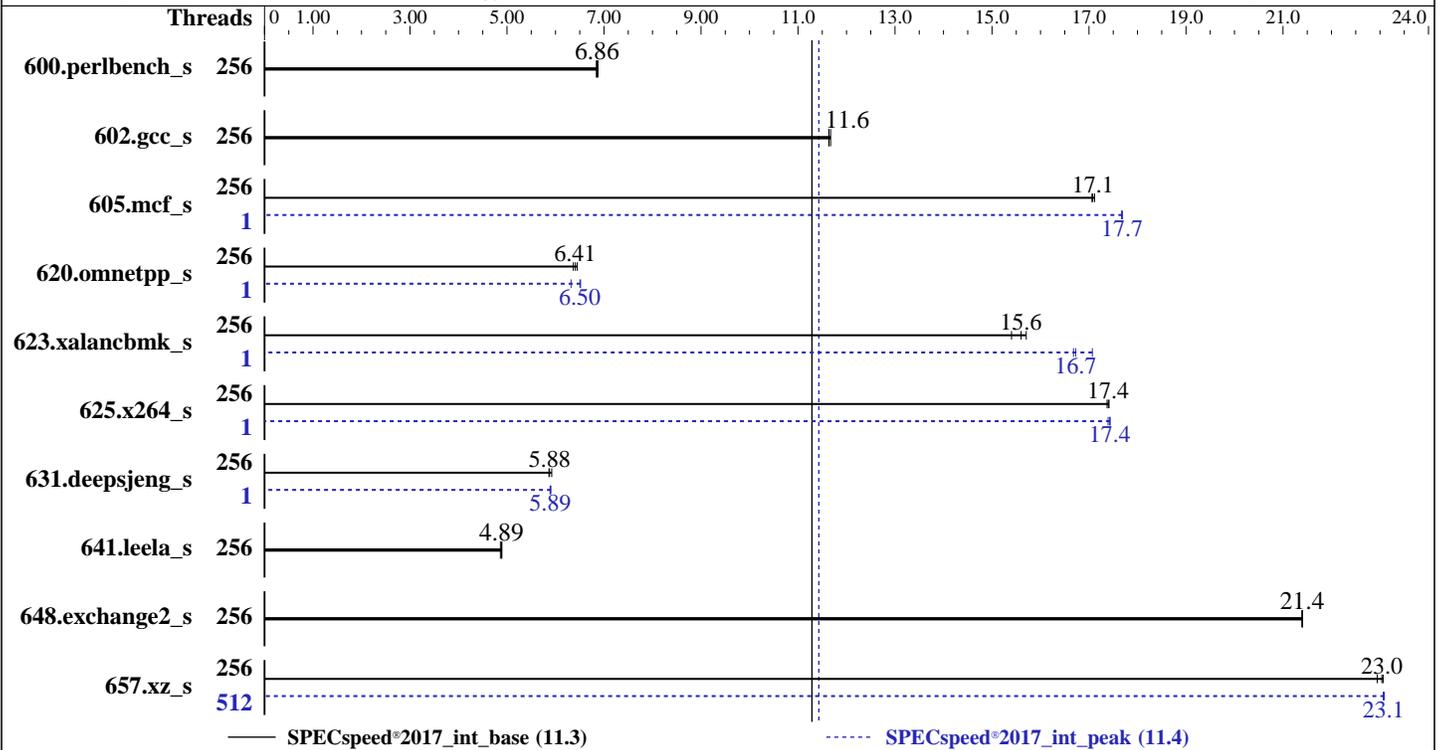

Hardware

CPU Name: AMD EPYC 9754
 Max MHz: 3100
 Nominal: 2250
 Enabled: 256 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Lenovo BIOS Version KAE111J 2.10 released May-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	259	6.84	258	6.88	<u>259</u>	<u>6.86</u>	256	259	6.84	258	6.88	<u>259</u>	<u>6.86</u>
602.gcc_s	256	<u>342</u>	<u>11.6</u>	341	11.7	342	11.6	256	<u>342</u>	<u>11.6</u>	341	11.7	342	11.6
605.mcf_s	256	276	17.1	277	17.1	<u>276</u>	<u>17.1</u>	1	<u>267</u>	<u>17.7</u>	267	17.7	267	17.7
620.omnetpp_s	256	253	6.45	<u>254</u>	<u>6.41</u>	256	6.37	1	250	6.52	<u>251</u>	<u>6.50</u>	258	6.32
623.xalancbmk_s	256	<u>90.8</u>	<u>15.6</u>	92.0	15.4	90.2	15.7	1	<u>84.7</u>	<u>16.7</u>	83.0	17.1	85.0	16.7
625.x264_s	256	102	17.4	101	17.4	<u>101</u>	<u>17.4</u>	1	<u>101</u>	<u>17.4</u>	101	17.4	101	17.4
631.deepsjeng_s	256	244	5.87	242	5.92	<u>244</u>	<u>5.88</u>	1	243	5.89	243	5.91	<u>243</u>	<u>5.89</u>
641.leela_s	256	349	4.89	351	4.86	<u>349</u>	<u>4.89</u>	256	349	4.89	351	4.86	<u>349</u>	<u>4.89</u>
648.exchange2_s	256	137	21.4	137	21.4	<u>137</u>	<u>21.4</u>	256	137	21.4	137	21.4	<u>137</u>	<u>21.4</u>
657.xz_s	256	269	22.9	268	23.1	<u>268</u>	<u>23.0</u>	512	268	23.1	268	23.1	<u>268</u>	<u>23.1</u>

SPECspeed®2017_int_base = **11.3**

SPECspeed®2017_int_peak = **11.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-511"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-amd-aocc400_znver4_A1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "512"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-511"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode
NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc400_znver4_A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon May 15 19:04:03 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
19:04:03 up 4 min, 1 user, load average: 0.29, 0.77, 0.43
USER  TTY  FROM          LOGIN@  IDLE   JCPU   PCPU  WHAT
root  tty1  -             19:00   1:30   1.32s  0.09s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6190570
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 6190570
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```
login -- root
-bash
/bin/bash ./run_SR665V3_bergamo_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.066/templogs/preenv.intspeerd.066.0.log --lognum 066.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400_znver4_A1
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9754 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00208
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 128
siblings      : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            512
On-line CPU(s) list: 0-511
Vendor ID:         AuthenticAMD
Model name:        AMD EPYC 9754 128-Core Processor
CPU family:        25
Model:             160
Thread(s) per core: 2
Core(s) per socket: 128
Socket(s):         2
Stepping:          2
Frequency boost:   enabled
CPU max MHz:       3100.3411
CPU min MHz:       1500.0000
BogoMIPS:          4493.27
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld

```

Virtualization:

```

AMD-V
L1d cache: 8 MiB (256 instances)
L1i cache: 8 MiB (256 instances)
L2 cache: 256 MiB (256 instances)
L3 cache: 512 MiB (32 instances)

```

```

NUMA node(s): 8
NUMA node0 CPU(s): 0-31,256-287
NUMA node1 CPU(s): 32-63,288-319
NUMA node2 CPU(s): 64-95,320-351
NUMA node3 CPU(s): 96-127,352-383
NUMA node4 CPU(s): 128-159,384-415
NUMA node5 CPU(s): 160-191,416-447
NUMA node6 CPU(s): 192-223,448-479
NUMA node7 CPU(s): 224-255,480-511

```

```

Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	8M	8	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	8	Unified	2	2048	1	64
L3	16M	512M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-31,256-287
node 0 size: 193269 MB
node 0 free: 192358 MB
node 1 cpus: 32-63,288-319
node 1 size: 193519 MB
node 1 free: 192912 MB
node 2 cpus: 64-95,320-351
node 2 size: 193519 MB
node 2 free: 193064 MB
node 3 cpus: 96-127,352-383
node 3 size: 193519 MB
node 3 free: 193001 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

node 4 cpus: 128-159,384-415
node 4 size: 193519 MB
node 4 free: 192992 MB
node 5 cpus: 160-191,416-447
node 5 size: 193485 MB
node 5 free: 192862 MB
node 6 cpus: 192-223,448-479
node 6 size: 193519 MB
node 6 free: 193039 MB
node 7 cpus: 224-255,480-511
node 7 size: 193311 MB
node 7 free: 192339 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

9. /proc/meminfo
MemTotal:      1584810532 kB

```

```

10. who -r
run-level 3 May 15 19:00

```

```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user      running

```

```

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc
rpcbind rpmconfigcheck rsyncd sapconf serial-getty@ smartd_generate_opts snmpd snmptrapd
sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd
generated ntp_sync
indirect uidd wickedd

```

```

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=d602917c-fa5b-4f9c-b2fa-9b5cdd656491
splash=silent
mitigations=auto
quiet

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Platform Notes (Continued)

security=apparmor

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 1.50 GHz and 2.25 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always] defer defer+madvise madvise never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400_znver4_A1
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Platform Notes (Continued)

/dev/sda3 xfs 890G 24G 867G 3% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR665 V3 MB,Genoa,Kauai,DDR5,Kauai,2U
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
5x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
4x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
4x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
11x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: KAE111J-2.10
BIOS Date: 05/11/2023
BIOS Revision: 2.10
Firmware Revision: 2.10

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
657.xz_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
641.leela_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: Same as 605.mcf_s

657.xz_s: Same as 605.mcf_s

C++ benchmarks:

620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2023

Hardware Availability: Aug-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

```
631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-15 07:04:02-0400.

Report generated on 2023-06-13 15:16:26 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-13.