



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

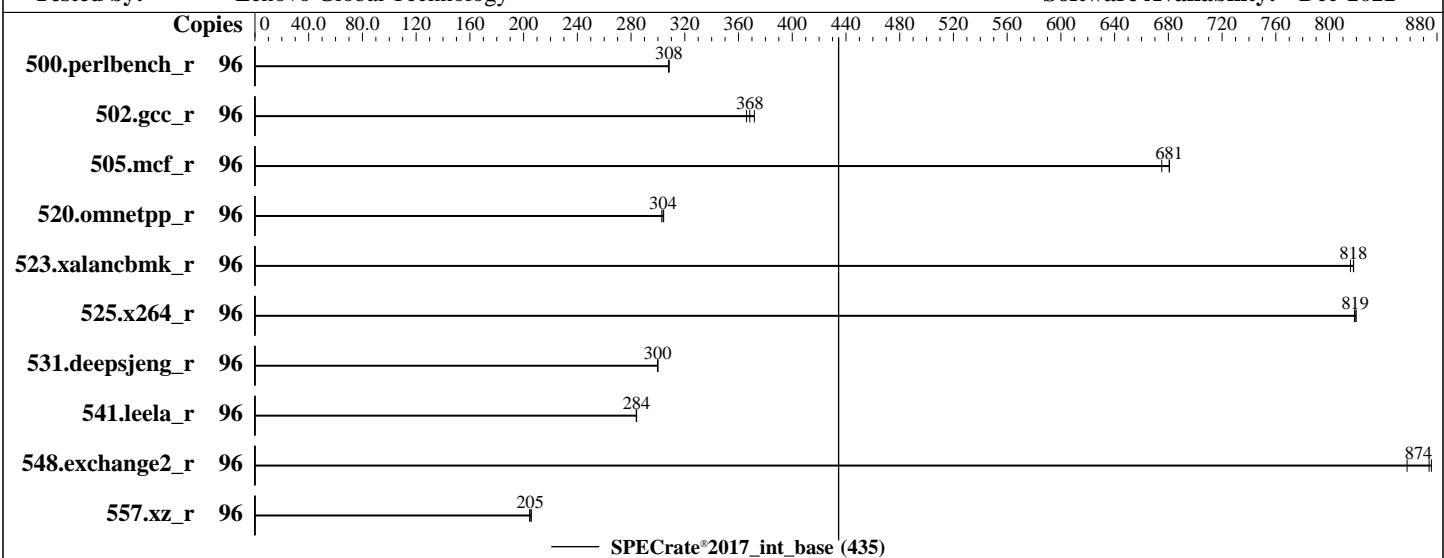

Hardware

CPU Name: Intel Xeon Gold 6418H
Max MHz: 4000
Nominal: 2100
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 960 GB SATA SSD
Other: None

OS:

SUSE Linux Enterprise Server 15 SP4 (x86_64)

Kernel 5.14.21-150400.22-default

C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;

No

Lenovo BIOS Version USE113Y 2.10 released Mar-2023

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

Parallel:

Firmware:

File System:

System State:

Base Pointers:

Peak Pointers:

Other:

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	496	308	496	308	496	308							
502.gcc_r	96	<u>369</u>	<u>368</u>	366	372	371	366							
505.mcf_r	96	228	681	230	675	228	681							
520.omnetpp_r	96	414	304	415	304	416	303							
523.xalancbmk_r	96	124	816	<u>124</u>	<u>818</u>	124	818							
525.x264_r	96	205	820	205	819	205	819							
531.deepsjeng_r	96	367	300	367	300	<u>367</u>	<u>300</u>							
541.leela_r	96	560	284	560	284	560	284							
548.exchange2_r	96	<u>288</u>	<u>874</u>	293	858	287	876							
557.xz_r	96	504	206	506	205	507	204							

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/lib/ia32:/home/cpu2017-1.1.9-ic
  2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC2

LLC Prefetch set to Disabled

UPI Link Disable set to Disabled 1 Link

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Jun 1 22:14:59 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----  
2. w  
22:14:59 up 1 min, 1 user, load average: 0.27, 0.15, 0.06  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 22:14 7.00s 0.81s 0.00s -bash
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 2062601  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (-t) unlimited  
max user processes      (-u) 2062601  
virtual memory           (kbytes, -v) unlimited  
file locks              (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=48 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=48 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.005/templogs/preenv.intrate.005.0.log --lognum 005.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

```
-----  
6. /proc/cpuinfo  
model name          : Intel(R) Xeon(R) Gold 6418H  
vendor_id           : GenuineIntel  
cpu family          : 6  
model               : 143  
stepping             : 8  
microcode           : 0x2b000190  
bugs                : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores            : 24  
siblings             : 48
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Gold 6418H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 2
Stepping: 8
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
       tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
       avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsavec xgetbv1 xsavec xgetbv1 xsave xgetbv1 xsavec xgetbv1
       cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
       avx_vnni avx512_bf16 wbnoinvd dtherm ida
       arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
       vpcimulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
       bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
       tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
       VT-x
Virtualization:
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 96 MiB (48 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-11,48-59
NUMA node1 CPU(s): 12-23,60-71
NUMA node2 CPU(s): 24-35,72-83
NUMA node3 CPU(s): 36-47,84-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-11,48-59

node 0 size: 128649 MB

node 0 free: 127825 MB

node 1 cpus: 12-23,60-71

node 1 size: 129017 MB

node 1 free: 128644 MB

node 2 cpus: 24-35,72-83

node 2 size: 129017 MB

node 2 free: 128668 MB

node 3 cpus: 36-47,84-95

node 3 size: 128989 MB

node 3 free: 128597 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 528050272 kB

10. who -r

run-level 3 Jun 1 22:13

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyrd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nbs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect      wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=17904382-c2c1-4de4-88b3-dda5a45ba9e5
    splash=silent
    mitigations=auto
    quiet
    security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag              1
max_ptes_none       511
max_ptes_shared     256
max_ptes_swap       64
pages_to_scan       4096
scan_sleep_millisecs 10000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 894G 82G 813G 10% /

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem ST650 V3 MAIN BOARD
Product Family: ThinkSystem
Serial: MDSN00110D

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: USE113Y-2.10
BIOS Date: 03/26/2023
BIOS Revision: 2.10
Firmware Revision: 2.10

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST650 V3
(2.10 GHz, Intel Xeon Gold 6418H)

SPECrate®2017_int_base = 435

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jun-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: May-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-T.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-T.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-01 10:14:59-0400.

Report generated on 2024-01-29 17:55:17 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-11.