



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 749

FusionServer 2288H V7 (Intel Xeon Gold 6448H)

SPECrate®2017\_fp\_peak = 751

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2023

Hardware Availability: Jan-2023

Software Availability: Dec-2022

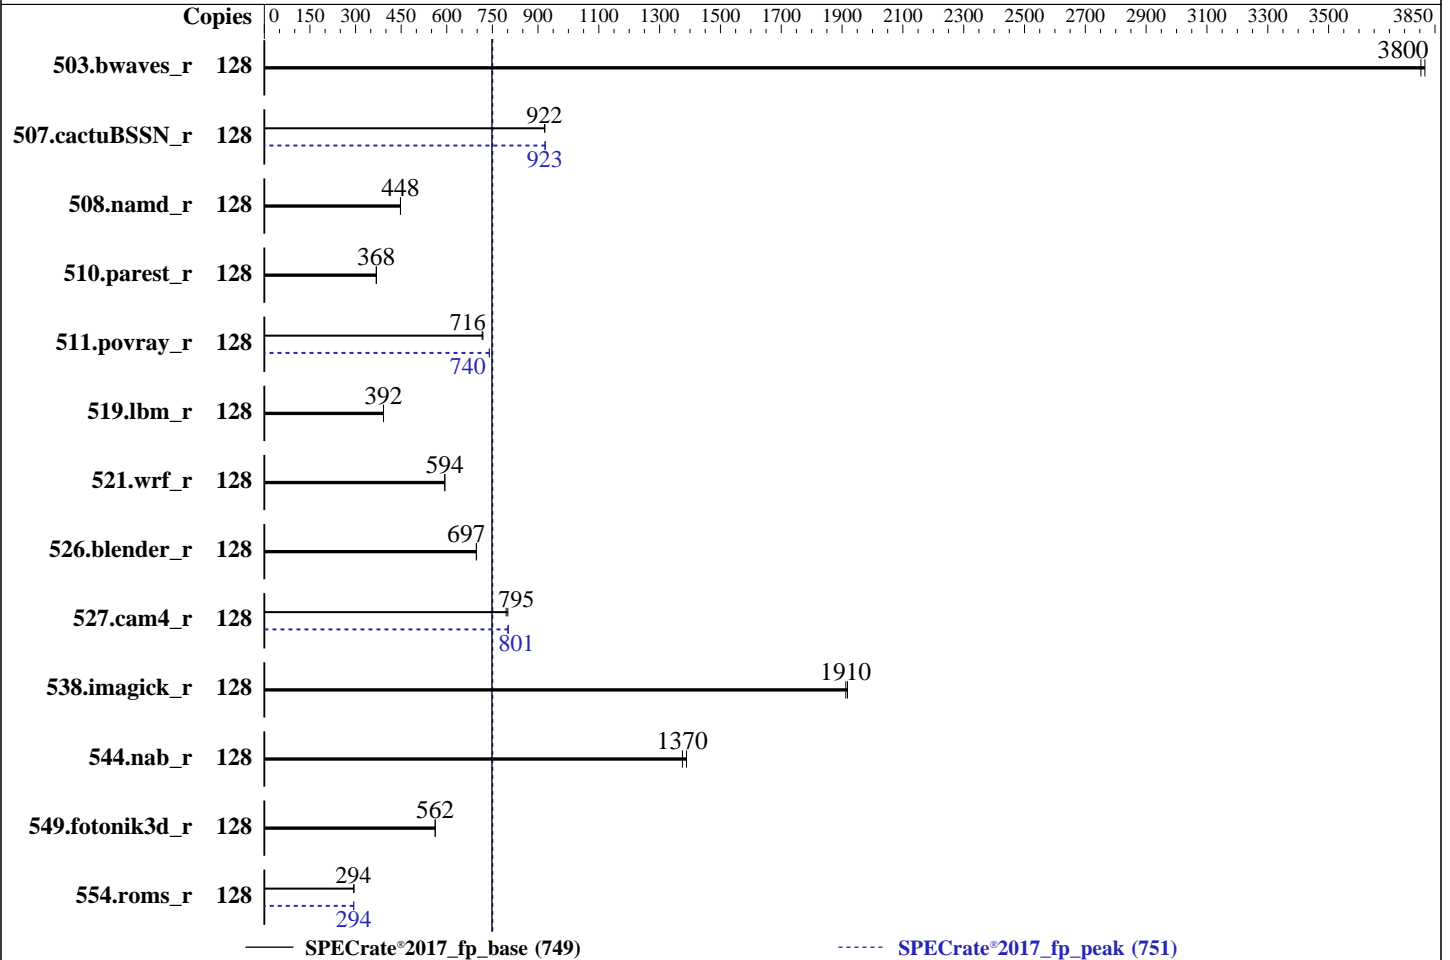

### Hardware

CPU Name: Intel Xeon Gold 6448H  
 Max MHz: 4100  
 Nominal: 2400  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 2.00.55 Released Mar-2023  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 749

FusionServer 2288H V7 (Intel Xeon Gold 6448H)

SPECrate®2017\_fp\_peak = 751

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jun-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	336	3820	<u>337</u>	<u>3800</u>			128	336	3820	<u>337</u>	<u>3800</u>		
507.cactuBSSN_r	128	<u>176</u>	<u>922</u>	176	923			128	<u>176</u>	<u>923</u>	175	924		
508.namd_r	128	<u>272</u>	<u>448</u>	272	448			128	<u>272</u>	<u>448</u>	272	448		
510.parest_r	128	908	369	<u>910</u>	<u>368</u>			128	908	369	<u>910</u>	<u>368</u>		
511.povray_r	128	416	719	<u>417</u>	<u>716</u>			128	404	740	<u>404</u>	<u>740</u>		
519.lbm_r	128	344	392	<u>344</u>	<u>392</u>			128	344	392	<u>344</u>	<u>392</u>		
521.wrf_r	128	<u>483</u>	<u>594</u>	483	594			128	<u>483</u>	<u>594</u>	483	594		
526.blender_r	128	279	698	<u>280</u>	<u>697</u>			128	279	698	<u>280</u>	<u>697</u>		
527.cam4_r	128	<u>281</u>	<u>795</u>	280	801			128	279	803	<u>280</u>	<u>801</u>		
538.imagick_r	128	<u>166</u>	<u>1910</u>	166	1920			128	<u>166</u>	<u>1910</u>	166	1920		
544.nab_r	128	<u>157</u>	<u>1370</u>	155	1390			128	<u>157</u>	<u>1370</u>	155	1390		
549.fotonik3d_r	128	887	562	<u>888</u>	<u>562</u>			128	887	562	<u>888</u>	<u>562</u>		
554.roms_r	128	689	295	<u>692</u>	<u>294</u>			128	<u>692</u>	<u>294</u>	692	294		

SPECrate®2017\_fp\_base = 749

SPECrate®2017\_fp\_peak = 751

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/je5.0.1-64"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 749

### FusionServer 2288H V7 (Intel Xeon Gold 6448H)

## SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /spec2017-icc2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Wed Jun 28 16:46:24 2023

SUT (System Under Test) info as seen by some common utilities.

#### Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 250 (250-6.el9\_0)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
16:46:24 up 2:51, 1 user, load average: 88.66, 118.39, 123.66
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty2 14:00 2:45m 1.15s 0.05s -bash
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 749

### FusionServer 2288H V7 (Intel Xeon Gold 6448H)

## SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060103
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060103
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 128 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg
--define smt-on --define cores=64 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak --iterations 2 -o all fprate
runcpu --define default-platform-flags --copies 128 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --iterations 2 --output_format all
--nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.052/temlogs/preenv.fprate.052.0.log --lognum 052.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec2017-icc2023.0
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6448H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 7
microcode      : 0x2b000111
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 749

### FusionServer 2288H V7 (Intel Xeon Gold 6448H)

## SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 6448H
BIOS Model name:       Intel(R) Xeon(R) Gold 6448H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               7
BogoMIPS:               4800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):    0-15,64-79
NUMA node1 CPU(s):    16-31,80-95
NUMA node2 CPU(s):    32-47,96-111
NUMA node3 CPU(s):    48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

Virtualization: VT-x

```

L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):    0-15,64-79
NUMA node1 CPU(s):    16-31,80-95
NUMA node2 CPU(s):    32-47,96-111
NUMA node3 CPU(s):    48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

## SPECrate®2017\_fp\_base = 749

### FusionServer 2288H V7 (Intel Xeon Gold 6448H)

## SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128042 MB
node 0 free: 119164 MB
node 1 cpus: 16-31,80-95
node 1 size: 129017 MB
node 1 free: 121998 MB
node 2 cpus: 32-47,96-111
node 2 size: 129017 MB
node 2 free: 121315 MB
node 3 cpus: 48-63,112-127
node 3 size: 129006 MB
node 3 free: 121960 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527445256 kB

10. who -r

run-level 5 Jun 28 13:55

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

```

Default Target Status
graphical      degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT          LOAD  ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd switcheroo-control
sysstat systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 749

FusionServer 2288H V7 (Intel Xeon Gold 6448H)

SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

dbus-daemon debug-shell dnsmasq firewalld iprump iprinit iprupdate iscsid iscsiuiio kpatch  
kvm\_stat ledmon man-db-restart-cache-update nftables nvme-autoconnect podman  
podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts  
rpmdb-rebuild serial-getty@ speech-dispatcher sshd-keygen@ systemd-boot-check-no-failures  
systemd-pstore systemd-sysext wpa\_supplicant  
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-70.13.1.el9\_0.x86\_64  
root=UUID=cc4bab05-907e-44ef-b818-2b2874390234  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=UUID=5ba347ca-8beb-4f6e-9c11-de63dc4ddf5f  
rhgb  
quiet

-----  
15. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 749

FusionServer 2288H V7 (Intel Xeon Gold 6448H)

SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

-----  
19. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

-----  
20. Disk information

```
SPEC is set to: /spec2017-icc2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   420G  108G  313G  26% /
```

-----  
21. /sys/devices/virtual/dmi/id

```
Vendor:      XFUSION
Product:     2288H V7
Product Family: Eagle Stream
Serial:      serial
```

-----  
22. dmidecode

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      XFUSION
BIOS Version:     2.00.55
BIOS Date:        03/07/2023
BIOS Revision:    0.55
```

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 749

FusionServer 2288H V7 (Intel Xeon Gold 6448H)

SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

### Compiler Version Notes (Continued)

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017\_fp\_base = 749

FusionServer 2288H V7 (Intel Xeon Gold 6448H)

SPECrate®2017\_fp\_peak = 751

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jun-2023  
Hardware Availability: Jan-2023  
Software Availability: Dec-2022

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_fp\_base = 749**

**FusionServer 2288H V7 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_fp\_peak = 751**

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using both C and C++:  
icpx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_fp\_base = 749

FusionServer 2288H V7 (Intel Xeon Gold 6448H)

SPECrate®2017\_fp\_peak = 751

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes  
538.imagick\_r: basepeak = yes  
544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes  
510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes  
549.fotonik3d\_r: basepeak = yes  
554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes  
527.cam4\_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

**SPECrate®2017\_fp\_base = 749**

**FusionServer 2288H V7 (Intel Xeon Gold 6448H)**

**SPECrate®2017\_fp\_peak = 751**

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Jan-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-28 16:46:24-0400.

Report generated on 2023-07-19 16:27:07 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.