



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

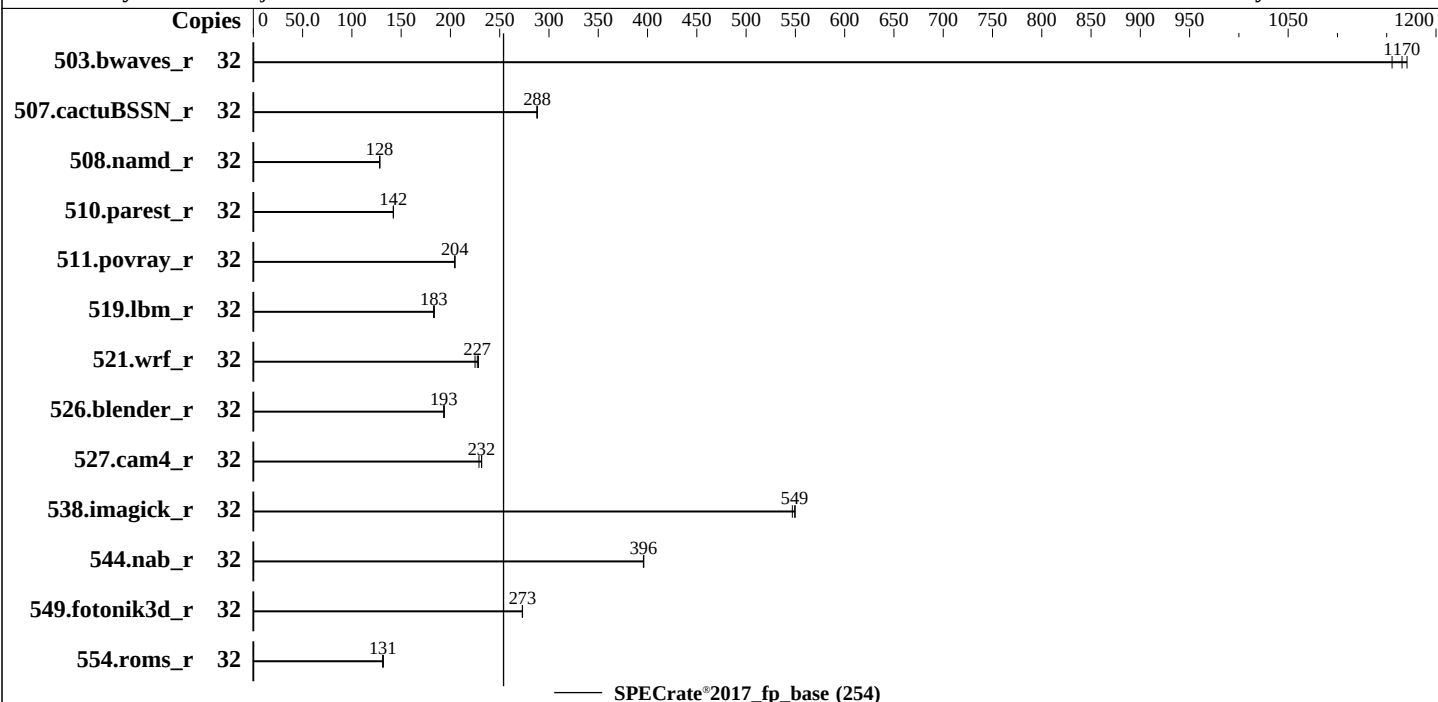

Hardware

CPU Name: Intel Xeon Gold 5415+
Max MHz: 4100
Nominal: 2900
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 22.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
Storage: 1 x 480 GB M.2 SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
5.14.21-150400.24.33-default
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler
for Linux;
Parallel: No
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.10.0 for
D3988-A1x. Released May-2023
tested as V1.0.0.0 R0.30.0 for D3988-A1x Feb-2023
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at
the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	274	1170	<u>275</u>	<u>1170</u>	278	1160							
507.cactuBSSN_r	32	141	288	<u>141</u>	<u>288</u>	141	288							
508.namd_r	32	<u>237</u>	<u>128</u>	237	128	237	128							
510.parest_r	32	589	142	<u>589</u>	<u>142</u>	590	142							
511.povray_r	32	366	204	365	205	<u>365</u>	<u>204</u>							
519.lbm_r	32	184	184	<u>184</u>	<u>183</u>	184	183							
521.wrf_r	32	314	228	319	225	<u>315</u>	<u>227</u>							
526.blender_r	32	<u>252</u>	<u>193</u>	252	193	251	194							
527.cam4_r	32	244	229	242	232	<u>242</u>	<u>232</u>							
538.imagick_r	32	<u>145</u>	<u>549</u>	146	547	145	550							
544.nab_r	32	<u>136</u>	<u>396</u>	136	396	136	396							
549.fotonik3d_r	32	457	273	<u>457</u>	<u>273</u>	457	273							
554.roms_r	32	385	132	<u>387</u>	<u>131</u>	387	131							

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Package C State limit = C0

CPU Performance Boost = Aggressive

SNC (Sub NUMA) = Enable SNC2

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu May 11 15:08:59 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-
1. uname -a
Linux localhost 5.14.21-150400.24.33-default #1 SMP PREEMPT_DYNAMIC Fri Nov 4 13:55:06 UTC 2022 (76cfe60)
x86_64 x86_64 x86_64 GNU/Linux
-
2. w
15:08:59 up 3 min, 1 user, load average: 0.02, 0.05, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 15:07 11.00s 1.76s 0.14s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4125435
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4125435
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=32 --define physicalfirst --define
  invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define cores=32 --define physicalfirst --define
  invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode rate
  --tune base --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 5415+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 8
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 5415+
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             2
Stepping:              8
CPU max MHz:           4100.0000
CPU min MHz:           800.0000
BogoMIPS:              5800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_l1d arch_capabilities
```

```
Virtualization:        VT-x
L1d cache:             768 KiB (16 instances)
L1i cache:             512 KiB (16 instances)
L2 cache:              32 MiB (16 instances)
L3 cache:              45 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-3,16-19
NUMA node1 CPU(s):     4-7,20-23
NUMA node2 CPU(s):     8-11,24-27
NUMA node3 CPU(s):     12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 257591 MB
node 0 free: 257146 MB
node 1 cpus: 4-7,20-23
node 1 size: 258045 MB
node 1 free: 257586 MB
node 2 cpus: 8-11,24-27
node 2 size: 258045 MB
node 2 free: 257603 MB
node 3 cpus: 12-15,28-31
node 3 size: 257700 MB
node 3 free: 257260 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1056137552 kB

10. who -r

run-level 3 May 11 15:06

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog sep5 smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh
boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed
debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld gpm
grub2-once haveged-switch-root ipmi ipmievdev iscsi-init iscsid iscsiuiio issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@
ostree-remount pppoe pppoe-server rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon
serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2 upower wpa_supplicant@
indirect pcscd saned@ wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.24.33-default
root=UUID=d977c1aa-2de5-45da-b4b1-9732e87ed311
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=325M,high
crashkernel=72M,low

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 4.10 GHz.
The governor "powersave" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs    60000
defrag                    1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs     10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

20. Disk information

SPEC is set to: /home/Benchmark/speccpu

```
Filesystem    Type    Size    Used Avail Use% Mounted on
/dev/sda2     btrfs  445G    72G   373G  17% /home
```

21. /sys/devices/virtual/dmi/id

```
Vendor:      FUJITSU
Product:     PRIMERGY CX2550 M7
Product Family: SERVER
Serial:      BBBB000001
```

22. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
10x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800, configured at 4400
2x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800, configured at 4400
4x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800, configured at 4400
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      FUJITSU
BIOS Version:     V1.0.0.0 R0.30.0 for D3988-A1x
BIOS Date:        02/11/2023
BIOS Revision:    0.30
Firmware Revision: 2.20
```

Compiler Version Notes

```
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M7, Intel Xeon Gold 5415+,
2.90GHz

SPECrate®2017_fp_base = 254

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-11 02:08:58-0400.

Report generated on 2025-05-13 14:13:11 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.