



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

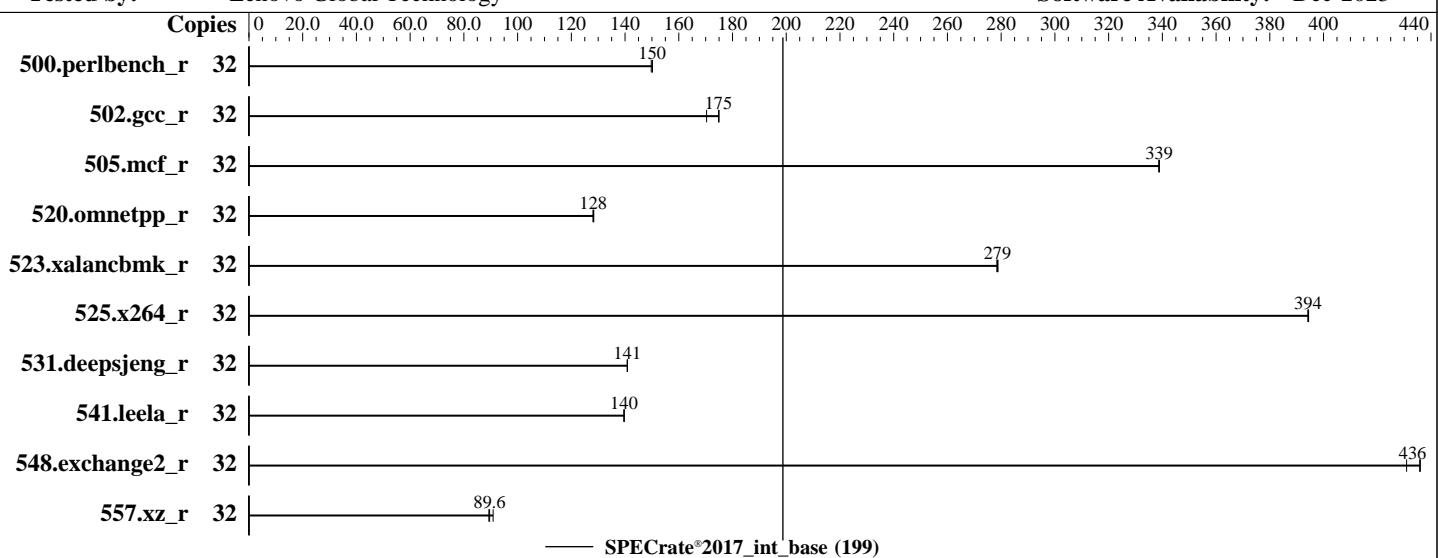

Hardware

CPU Name: Intel Xeon Gold 6534
Max MHz: 4200
Nominal: 3900
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 22.5 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version ESE121V 3.10 released Jan-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	339	150	340	150	339	150							
502.gcc_r	32	266	170	259	175	259	175							
505.mcf_r	32	153	339	153	339	153	339							
520.omnetpp_r	32	328	128	327	128	328	128							
523.xalancbmk_r	32	121	279	121	279	121	278							
525.x264_r	32	142	394	142	394	142	394							
531.deepsjeng_r	32	260	141	260	141	260	141							
541.leela_r	32	380	140	379	140	379	140							
548.exchange2_r	32	195	431	192	436	192	436							
557.xz_r	32	387	89.3	386	89.6	380	90.9							

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.
  9-ic2023.2.3/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on test1 Thu Jan 25 05:16:52 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux test1 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
05:16:52 up 5:04, 1 user, load average: 17.57, 28.12, 30.34
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 00:14 5:01m 0.79s 0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size      (blocks, -c) unlimited
data seg size       (kbytes, -d) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```
scheduling priority          (-e) 0
file size                  (blocks, -f) unlimited
pending signals             (-i) 4127075
max locked memory          (kbytes, -l) 64
max memory size            (kbytes, -m) unlimited
open files                 (-n) 1024
pipe size                  (512 bytes, -p) 8
POSIX message queues       (bytes, -q) 819200
real-time priority          (-r) 0
stack size                 (kbytes, -s) unlimited
cpu time                   (seconds, -t) unlimited
max user processes          (-u) 4127075
virtual memory              (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size reframe intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.371/templogs/preenv.intrate.371.0.log --lognum 371.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu/2017-1.1.9-ic2023.2.3
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) GOLD 6534
vendor_id       : GenuineIntel
cpu family     : 6
model          : 207
stepping        : 2
microcode       : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 8
siblings        : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```

CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6534
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
Stepping: 2
BogoMIPS: 7800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperfmpfreq tsc_known_freq pn1 pclmulqdq dtes64 ds_cpl
       vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
       x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
       abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
       cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
       ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
       rtm cqmqrdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
       intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavenc xgetbv1 xsaves
       cqmqllc cqmqoccup_llc cqmqmbm_total cqmqmbm_local avx_vnni avx512_bf16
       wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
       avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
       avx512_vpopsntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
       enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
       amx_tile flush_ll1d arch_capabilities

Virtualization: VT-x
L1d cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 32 MiB (16 instances)
L3 cache: 45 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-7,16-23
NUMA node1 CPU(s): 8-15,24-31
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K     768K   12 Data        1      64      1          64
  L1i     32K     512K    8 Instruction  1      64      1          64
  L2      2M      32M    16 Unified     2    2048      1          64
  L3    22.5M    45M    15 Unified     3   24576      1          64

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-7,16-23

node 0 size: 515720 MB

node 0 free: 513757 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 1 cpus: 8-15,24-31
node 1 size: 516071 MB
node 1 free: 514487 MB
node distances:
node    0    1
 0: 10 21
 1: 21 10

-----
9. /proc/meminfo
MemTotal:      1056555812 kB

-----
10. who -r
run-level 3 Jan 25 00:12

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target  Status
multi-user      running

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi
                issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog
                smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled       autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb rdisc
                rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                systemd-time-wait-sync systemd-timesyncd
generated      ntp_sync
indirect       wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f976c541-a329-4c54-ba84-4be16556ee18
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                0
vm.dirty_expire_centisecs    3000
vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

```
-----  
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sdb2    xfs   894G  232G  662G  26% /
```

```
-----  
20. /sys/devices/virtual/dmi/id
Vendor:        Lenovo
Product:       ThinkSystem SR630 V3
Product Family: ThinkSystem
Serial:        1234567890
```

```
-----  
21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 16x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4800
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: ESE121V-3.10
BIOS Date: 01/09/2024
BIOS Revision: 3.10
Firmware Revision: 12.6

Compiler Version Notes

=====| 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
=====Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====| 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====| 548.exchange2_r(base)
=====Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V3
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_int_base = 199

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-24 16:16:51-0500.

Report generated on 2024-02-28 19:06:00 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.