



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11


(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

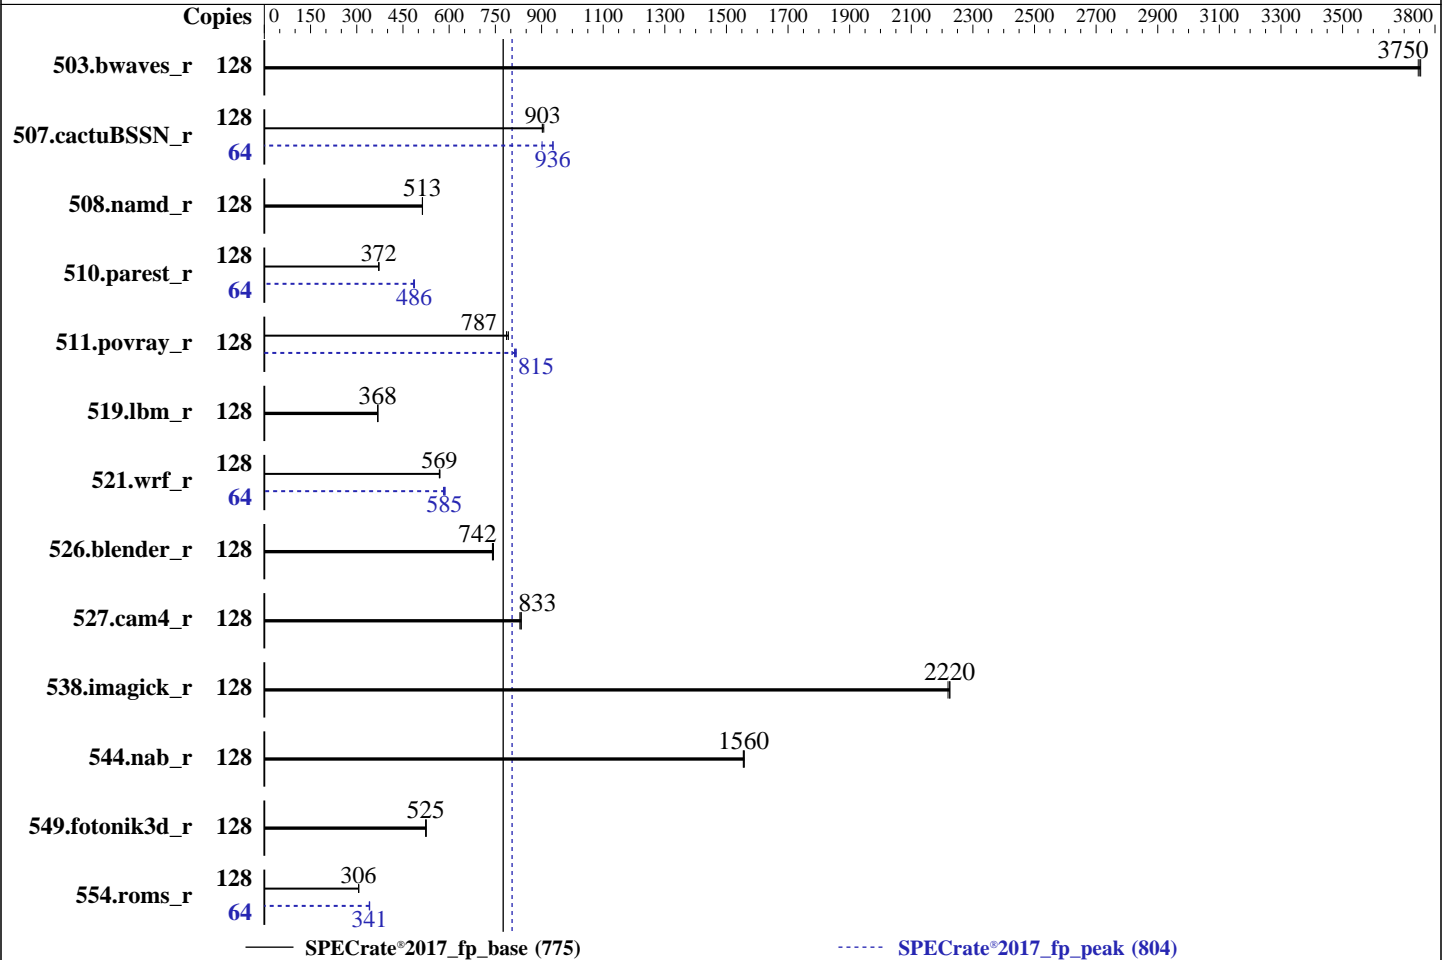

Hardware

CPU Name: Intel Xeon Gold 6548Y+
 Max MHz: 4100
 Nominal: 2500
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	342	3750	<u>342</u>	<u>3750</u>	343	3750	128	342	3750	<u>342</u>	<u>3750</u>	343	3750
507.cactuBSSN_r	128	179	907	<u>179</u>	<u>903</u>	180	902	64	89.9	902	86.4	938	<u>86.6</u>	<u>936</u>
508.namd_r	128	<u>237</u>	<u>513</u>	237	513	237	514	128	<u>237</u>	<u>513</u>	237	513	237	514
510.parest_r	128	902	371	<u>901</u>	<u>372</u>	901	372	64	346	485	<u>344</u>	<u>486</u>	343	487
511.povray_r	128	380	786	<u>380</u>	<u>787</u>	377	792	128	<u>367</u>	<u>815</u>	368	812	365	818
519.lbm_r	128	366	368	<u>366</u>	<u>368</u>	366	368	128	366	368	<u>366</u>	<u>368</u>	366	368
521.wrf_r	128	503	570	<u>504</u>	<u>569</u>	505	568	64	244	587	<u>245</u>	<u>585</u>	247	582
526.blender_r	128	262	744	<u>263</u>	<u>742</u>	263	740	128	262	744	<u>263</u>	<u>742</u>	263	740
527.cam4_r	128	<u>269</u>	<u>833</u>	270	830	268	834	128	<u>269</u>	<u>833</u>	270	830	268	834
538.imagick_r	128	143	2220	143	2230	<u>143</u>	<u>2220</u>	128	143	2220	143	2230	<u>143</u>	<u>2220</u>
544.nab_r	128	139	1550	<u>138</u>	<u>1560</u>	138	1560	128	139	1550	<u>138</u>	<u>1560</u>	138	1560
549.fotonik3d_r	128	<u>951</u>	<u>525</u>	949	526	953	524	128	<u>951</u>	<u>525</u>	949	526	953	524
554.roms_r	128	663	307	<u>664</u>	<u>306</u>	665	306	64	298	341	<u>298</u>	<u>341</u>	297	342

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Gold 6548Y+ processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Sub-NUMA Clustering set to Enable SNC2(2-clusters)

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Jan 31 19:18:15 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

2. w
19:18:15 up 0 min, 0 users, load average: 0.57, 0.21, 0.08
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062640
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062640
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/fprate_new.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : INTEL(R) XEON(R) GOLD 6548Y+
vendor_id : GenuineIntel
cpu family : 6
model : 207
stepping : 2
microcode : 0x21000200
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores : 32
siblings : 64
2 physical ids (chips)
128 processors (hardware threads)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               128
On-line CPU(s) list: 0-127
Vendor ID:            GenuineIntel
Model name:           INTEL(R) XEON(R) GOLD 6548Y+
CPU family:           6
Model:                207
Thread(s) per core:  2
Core(s) per socket:  32
Socket(s):            2
Stepping:             2
BogoMIPS:             5000.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                    arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:       VT-x
L1d cache:            3 MiB (64 instances)
L1i cache:            2 MiB (64 instances)
L2 cache:             128 MiB (64 instances)
L3 cache:             120 MiB (2 instances)
NUMA node(s):        4
NUMA node0 CPU(s):   0-15,64-79
NUMA node1 CPU(s):   16-31,80-95
NUMA node2 CPU(s):   32-47,96-111
NUMA node3 CPU(s):   48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128709 MB
node 0 free: 128103 MB
node 1 cpus: 16-31,80-95
node 1 size: 129015 MB
node 1 free: 128471 MB
node 2 cpus: 32-47,96-111
node 2 size: 129015 MB
node 2 free: 128492 MB
node 3 cpus: 48-63,112-127
node 3 size: 128942 MB
node 3 free: 128463 MB
node distances:
node 0 1 2 3
0: 10 20 30 30
1: 20 10 30 30
2: 30 30 10 20
3: 30 30 20 10
```

9. /proc/meminfo

MemTotal: 528060524 kB

10. who -r

run-level 3 Jan 31 19:17

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load
lunmask rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

indirect pcsd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=cc6cc077-0be5-45b2-9254-52358283bcfe
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

18. OS release

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

19. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	371G	178G	192G	49%	/home

20. /sys/devices/virtual/dmi/id

Vendor: HPE
 Product: ProLiant DL360 Gen11
 Product Family: ProLiant
 Serial: CNX2070DC4

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 5200

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
 BIOS Version: 2.12
 BIOS Date: 12/13/2023
 BIOS Revision: 2.12
 Firmware Revision: 1.55

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both C and C++:

```

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:

`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`519.lbm_r: basepeak = yes`

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.50 GHz, Intel Xeon Gold 6548Y+)

SPECrate®2017_fp_base = 775

SPECrate®2017_fp_peak = 804

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-31 08:48:15-0500.

Report generated on 2024-02-28 19:14:00 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.