



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

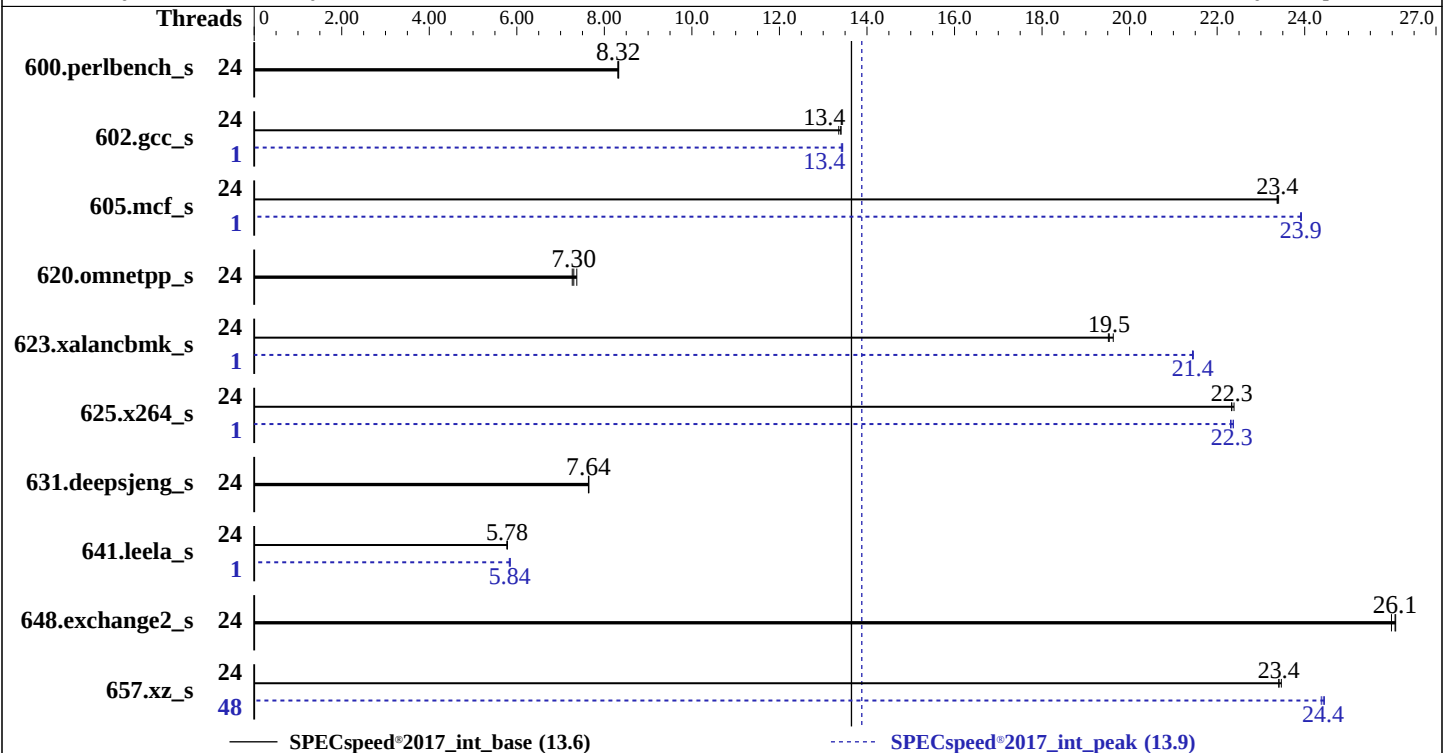

Hardware

CPU Name: AMD EPYC 9224
Max MHz: 3700
Nominal: 2500
Enabled: 24 cores, 1 chip, 2 threads/core
Orderable: 1 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 64 MB I+D on chip per chip, 16 MB shared / 6 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
Storage: 1 x 240 GB M.2 SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 4.3.5 released Aug-2024
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	213	8.32	214	8.31	213	8.33	24	213	8.32	214	8.31	213	8.33
602.gcc_s	24	297	13.4	297	13.4	298	13.4	1	296	13.4	297	13.4	296	13.4
605.mcf_s	24	202	23.4	202	23.4	202	23.4	1	197	23.9	197	23.9	197	23.9
620.omnetpp_s	24	223	7.30	221	7.37	224	7.27	24	223	7.30	221	7.37	224	7.27
623.xalancbmk_s	24	72.2	19.6	72.6	19.5	72.5	19.5	1	66.1	21.4	66.1	21.4	66.0	21.5
625.x264_s	24	79.0	22.3	78.8	22.4	79.0	22.3	1	78.8	22.4	79.0	22.3	79.1	22.3
631.deepsjeng_s	24	188	7.64	188	7.64	187	7.65	24	188	7.64	188	7.64	187	7.65
641.leela_s	24	295	5.78	295	5.77	295	5.78	1	292	5.84	292	5.85	293	5.83
648.exchange2_s	24	113	26.0	113	26.1	113	26.1	24	113	26.0	113	26.1	113	26.1
657.xz_s	24	264	23.4	264	23.4	263	23.5	48	253	24.4	254	24.4	253	24.5

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-47"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-47"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS2

Determinism Slider set to Power

DF C-States set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Jan 29 07:14:51 2025

SUT (System Under Test) info as seen by some common utilities.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Platform Notes (Continued)

Table of contents

```
-----
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
```

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
 07:14:51 up 5 min,  1 user,  load average: 0.00, 0.02, 0.00
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -               07:12    19.00s  1.22s  0.10s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
-----
```

```
-----
3. Username
From environment variable $USER:  root
-----
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094862
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094862
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py -b intspeed
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templots/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9224 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size      : 3584 4K pages
cpu cores      : 24
siblings       : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.39.3:
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      48
On-line CPU(s) list:         0-47
Vendor ID:                   AuthenticAMD
BIOS Vendor ID:              Advanced Micro Devices, Inc.
Model name:                  AMD EPYC 9224 24-Core Processor
BIOS Model name:             AMD EPYC 9224 24-Core Processor
BIOS CPU family:             107
CPU family:                  25
Model:                      17
Thread(s) per core:          2
Core(s) per socket:          24
Socket(s):                   1
Stepping:                    1
Frequency boost:             enabled
CPU(s) scaling MHz:          71%
CPU max MHz:                 3706.0540
CPU min MHz:                 1500.0000
BogoMIPS:                    4992.52
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat

Unknown CPU @ 2.5GHz

(Continued on next page)
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Platform Notes (Continued)

pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_omsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap
AMD-V

Virtualization:

L1d cache: 768 KiB (24 instances)

L1i cache: 768 KiB (24 instances)

L2 cache: 24 MiB (24 instances)

L3 cache: 64 MiB (4 instances)

NUMA node(s): 2

NUMA node0 CPU(s): 0-11,24-35

NUMA node1 CPU(s): 12-23,36-47

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Mitigation; Safe RET

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	768K	8	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	8	Unified	2	2048	1	64
L3	16M	64M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-11,24-35

node 0 size: 386725 MB

node 0 free: 385788 MB

node 1 cpus: 12-23,36-47

node 1 size: 387017 MB

node 1 free: 386076 MB

node distances:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
node    0    1
0:    10   12
1:    12   10
```

```
9. /proc/meminfo
MemTotal:      792312832 kB
```

```
10. who -r
run-level 3 Jan 29 07:09
```

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user      running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdt iscsi-init iscsid
issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
munge nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon
salt-minion serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd strongswan
strongswan-starter svnservice systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync
systemd-timesyncd tcshd udisks2 virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd
virtnwfilterd virtsecrettd virtstoraged ypbind
indirect pcsd systemd-userdbd tftpd wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=076ee295-de6f-47c7-95ad-f8ccc04c1b41
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
14. cpupower frequency-info
analyzing CPU 31:
current policy: frequency should be within 1.50 GHz and 2.50 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
```

```
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
vm.compaction_proactiveness      20
vm.dirty_background_bytes        0
vm.dirty_background_ratio        10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs        3000
vm.dirty_ratio                   8
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio            1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     1
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs 224G  8.1G  212G   4% /home
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Cisco Systems Inc
Product:     UCSC-C225-M8S
Serial:      WZP28199HWP
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
9x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Platform Notes (Continued)

3x 0xCE00 M321R8GA0PB0-CWMKJ 64 GB 2 rank 5600, configured at 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C225M8.4.3.5.166.0819241228
BIOS Date: 08/19/2024
BIOS Revision: 5.27

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602 gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-DSPEC_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 602.gcc_s

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9224 24-Core Processor)

SPECspeed®2017_int_base = 13.6

SPECspeed®2017_int_peak = 13.9

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2025

Hardware Availability: Nov-2024

Software Availability: Sep-2024

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-29 07:14:50-0500.

Report generated on 2025-02-25 19:05:17 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.