



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

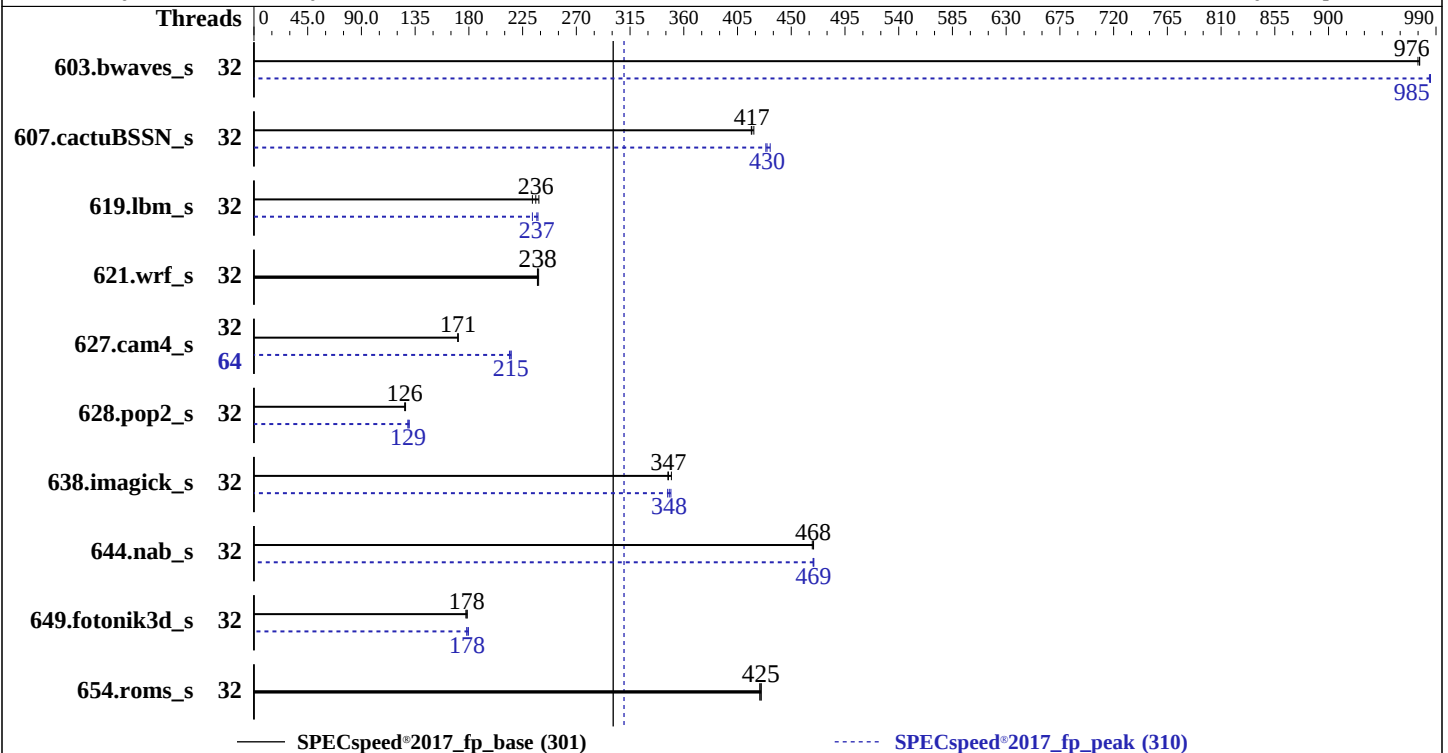

Hardware

CPU Name: AMD EPYC 9335
Max MHz: 4400
Nominal: 3000
Enabled: 32 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage: 1 x 240 GB M.2 SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 4.3.5c released Dec-2024
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	60.4	976	60.5	975	60.4	976	32	59.9	985	59.9	985	59.9	984
607.cactuBSSN_s	32	39.8	419	40.0	417	40.0	417	32	38.8	430	38.9	429	38.6	432
619.lbm_s	32	22.2	236	21.9	239	22.5	233	32	22.5	233	22.0	238	22.1	237
621.wrf_s	32	55.7	237	55.5	238	55.6	238	32	55.7	237	55.5	238	55.6	238
627.cam4_s	32	51.8	171	51.8	171	51.9	171	64	41.1	215	41.2	215	41.4	214
628.pop2_s	32	93.9	126	93.5	127	94.0	126	32	92.0	129	92.0	129	91.3	130
638.imagick_s	32	41.3	350	41.6	347	41.6	347	32	41.6	346	41.5	348	41.3	349
644.nab_s	32	37.3	469	37.4	468	37.3	468	32	37.3	468	37.3	469	37.3	469
649.fotonik3d_s	32	51.0	179	51.4	177	51.1	178	32	51.1	178	51.1	178	50.7	180
654.roms_s	32	37.2	424	37.1	425	37.1	425	32	37.2	424	37.1	425	37.1	425

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-63"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 627.cam4_s peak run:

GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-31"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS1

Determinism Slider set to Power

DF C-States set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

running on localhost Sun Mar 23 21:49:37 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
21:49:37 up 2 min, 1 user, load average: 0.08, 0.05, 0.02
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -             21:48   17.00s  0.77s  0.03s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3092777
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

cpu time (seconds, -t) unlimited
max user processes (-u) 3092777
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
```

```
login -- root
```

```
-bash
```

```
python3 ./run_amd_speed_aocc500_znver5_A1.py -b fpspeed
```

```
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
```

```
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
```

```
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.001/temlogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
```

```
specperl $SPEC/bin/sysinfo
```

```
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9335 32-Core Processor
```

```
vendor_id       : AuthenticAMD
```

```
cpu family      : 26
```

```
model           : 2
```

```
stepping        : 1
```

```
microcode       : 0xb00211a
```

```
bugs             : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
```

```
TLB size        : 192 4K pages
```

```
cpu cores        : 32
```

```
siblings         : 64
```

```
1 physical ids (chips)
```

```
64 processors (hardware threads)
```

```
physical id 0: core ids 0-31
```

```
physical id 0: apicids 0-63
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64  
CPU op-mode(s):    32-bit, 64-bit  
Address sizes:      52 bits physical, 57 bits virtual  
Byte Order:         Little Endian  
CPU(s):             64  
On-line CPU(s) list: 0-63  
Vendor ID:          AuthenticAMD  
BIOS Vendor ID:     Advanced Micro Devices, Inc.  
Model name:         AMD EPYC 9335 32-Core Processor  
BIOS Model name:    AMD EPYC 9335 32-Core Processor  
BIOS CPU family:    107  
CPU family:         26  
Model:              2  
Thread(s) per core: 2  
Core(s) per socket: 32  
Socket(s):          1  
Stepping:           1  
Frequency boost:    enabled
```

Unknown CPU @ 3.0GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

CPU(s) scaling MHz: 71%
CPU max MHz: 4420.8979
CPU min MHz: 1500.0000
BogoMIPS: 5991.06
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap
L1d cache: 1.5 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 32 MiB (32 instances)
L3 cache: 128 MiB (4 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	128M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)
node 0 cpus: 0-63
node 0 size: 773221 MB
node 0 free: 772148 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

node distances:

node 0
0: 10

9. /proc/meminfo

MemTotal: 791779080 kB

10. who -r

run-level 3 Mar 23 21:47

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdt iscsi-init iscsid
issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
munge nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon
salt-minion serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd strongswan
strongswan-starter svnservice systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-nspawn@ systemd-sysext systemd-time-wait-sync
systemd-timesyncd tcshd udisks2 virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd
virtnwfilterd virtsecret virtstoraged ypbind
indirect pcsd systemd-userdbd tftpd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=076ee295-de6f-47c7-95ad-f8ccc04c1b41
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info

analyzing CPU 54:

current policy: frequency should be within 1.50 GHz and 3.00 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing 0
kernel.randomize_va_space 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

```
vm.compaction_proactiveness      20
vm.dirty_background_bytes        0
vm.dirty_background_ratio        10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs        3000
vm.dirty_ratio                   8
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio            1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                    1
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs 224G  8.4G  211G   4% /home
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:      Cisco Systems Inc
Product:     UCSC-C225-M8S
Product Family: Cisco UCS Rack Server
Serial:      WZP28199HWP
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Platform Notes (Continued)

12x 0xAD00 HMC694AHBRA480N 64 GB 2 rank 6400, configured at 6000

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C225M8.4.3.5c.0.1202241036
BIOS Date: 12/02/2024
BIOS Revision: 5.35

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -fltto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:

-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -fltto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M8 (AMD EPYC 9335 32-Core Processor)

SPECspeed®2017_fp_base = 301

SPECspeed®2017_fp_peak = 310

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Sep-2024

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-23 21:49:37-0400.

Report generated on 2025-05-28 23:27:11 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-28.