



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

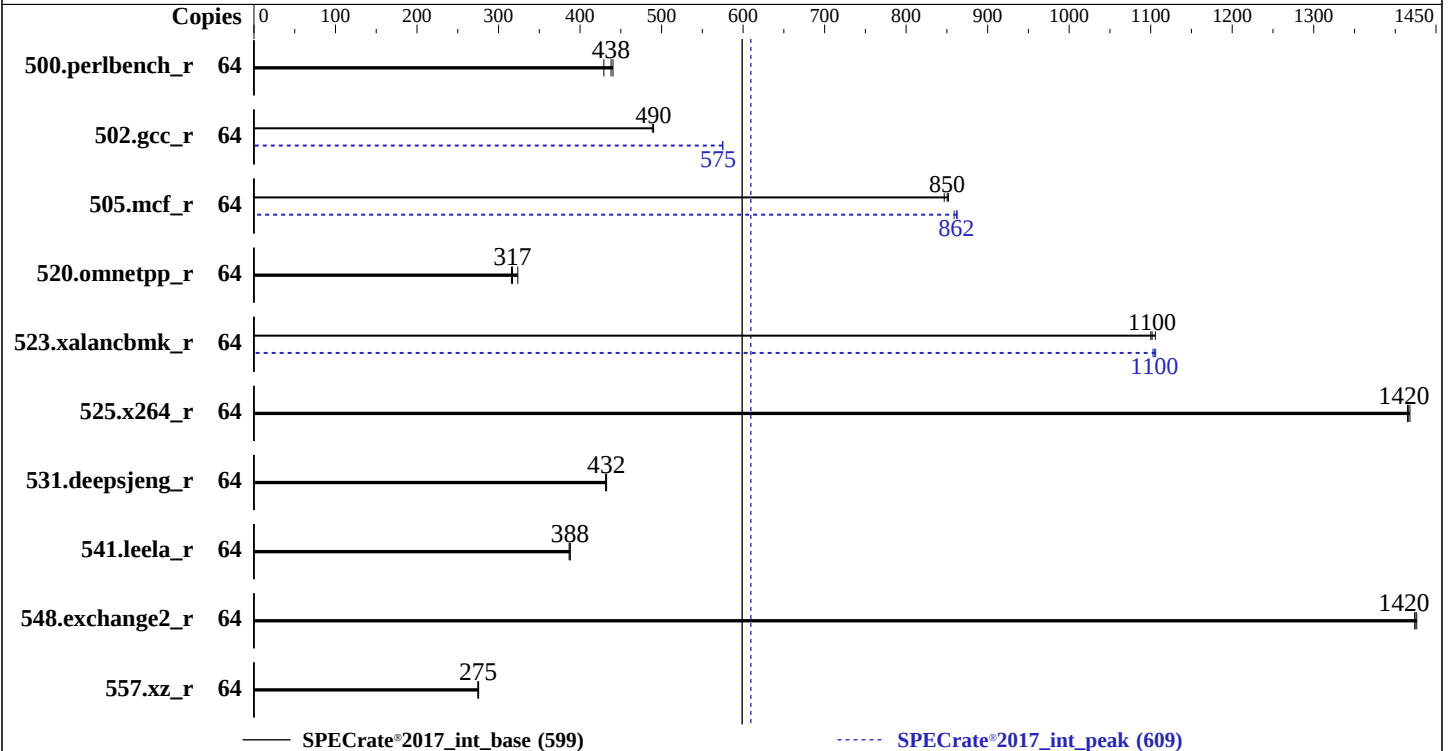

Hardware

CPU Name: AMD EPYC 9175F
Max MHz: 5000
Nominal: 4200
Enabled: 32 cores, 2 chips, 2 threads/core
Orderable: 2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip,
32 MB shared / 1 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 1 x 3.84 TB NVME SSD
Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Lenovo BIOS Version QGE139H 8.21 released May-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	231	440	<u>233</u>	<u>438</u>	237	429	64	231	440	<u>233</u>	<u>438</u>	237	429
502.gcc_r	64	185	490	185	489	<u>185</u>	<u>490</u>	64	<u>158</u>	<u>575</u>	158	575	158	575
505.mcf_r	64	122	847	<u>122</u>	<u>850</u>	121	852	64	<u>120</u>	<u>862</u>	120	863	120	859
520.omnetpp_r	64	266	316	<u>265</u>	<u>317</u>	259	324	64	266	316	<u>265</u>	<u>317</u>	259	324
523.xalancbmk_r	64	<u>61.3</u>	<u>1100</u>	61.4	1100	61.1	1110	64	<u>61.2</u>	<u>1100</u>	61.3	1100	61.1	1110
525.x264_r	64	79.2	1420	<u>79.1</u>	<u>1420</u>	79.0	1420	64	79.2	1420	<u>79.1</u>	<u>1420</u>	79.0	1420
531.deepsjeng_r	64	170	431	<u>170</u>	<u>432</u>	170	433	64	170	431	<u>170</u>	<u>432</u>	170	433
541.leela_r	64	274	387	<u>273</u>	<u>388</u>	273	388	64	274	387	<u>273</u>	<u>388</u>	273	388
548.exchange2_r	64	118	1430	118	1420	<u>118</u>	<u>1420</u>	64	118	1430	118	1420	<u>118</u>	<u>1420</u>
557.xz_r	64	251	276	252	275	<u>251</u>	<u>275</u>	64	251	276	252	275	<u>251</u>	<u>275</u>

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:always"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

P-State set to Enabled

NUMA Nodes per Socket set to NPS4

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Jun 4 06:00:11 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

21. dmidecode

22. BIOS

1. uname -a

```
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

2. w

```
06:00:11 up 6:07, 1 user, load average: 11.43, 44.76, 56.15
USER      TTY      FROM      LOGIN@   IDLE   JCPU   PCPU WHAT
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 3094186
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 3094186
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run025-compliant-amd-rateint.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.481/tempslogs/preenv.intrate.481.0.log --lognum 481.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9175F 16-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
stepping          : 1
microcode         : 0xb002147
bugs              : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size         : 192 4K pages
cpu cores        : 16
siblings         : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
physical id 1: core ids 0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
physical id 0: apicids
0-1,16-17,32-33,48-49,64-65,80-81,96-97,112-113,128-129,144-145,160-161,176-177,192-193,208-209,224-225,240-241
physical id 1: apicids
256-257,272-273,288-289,304-305,320-321,336-337,352-353,368-369,384-385,400-401,416-417,432-433,448-449,464-465,480-481,496-497
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            64
On-line CPU(s) list: 0-63
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9175F 16-Core Processor
BIOS Model name:   AMD EPYC 9175F 16-Core Processor
BIOS CPU family:   107
CPU family:        26
Model:            2
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s):         2
Stepping:          1
Frequency boost:    enabled
CPU(s) scaling MHz: 96%
CPU max MHz:       4200.0000
CPU min MHz:       1500.0000
BogoMIPS:          8399.86
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                  osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                  perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                  ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                  smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                  avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                  cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                  xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                  nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Virtualization:
L1d cache:
L1i cache:
L2 cache:
L3 cache:
NUMA node(s):
NUMA node0 CPU(s):
NUMA node1 CPU(s):
NUMA node2 CPU(s):
NUMA node3 CPU(s):
NUMA node4 CPU(s):
NUMA node5 CPU(s):
NUMA node6 CPU(s):
NUMA node7 CPU(s):
Vulnerability Gather data sampling:
Vulnerability Itlb multihit:
Vulnerability L1tf:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Mmio stale data:
Vulnerability Reg file data sampling:
Vulnerability Retbleed:
Vulnerability Spec rstack overflow:
Vulnerability Spec store bypass:
Vulnerability Spectre v1:
Vulnerability Spectre v2:

Vulnerability Srbds:
Vulnerability Tsx async abort:

pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnm
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap
AMD-V
1.5 MiB (32 instances)
1 MiB (32 instances)
32 MiB (32 instances)
1 GiB (32 instances)
8
0-3,32-35
4-7,36-39
8-11,40-43
12-15,44-47
16-19,48-51
20-23,52-55
24-27,56-59
28-31,60-63
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Mitigation; Speculative Store Bypass disabled via prctl
Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 96348 MB
node 0 free: 95844 MB
node 1 cpus: 4-7,36-39
node 1 size: 96765 MB
node 1 free: 96363 MB
node 2 cpus: 8-11,40-43
node 2 size: 96727 MB
node 2 free: 96304 MB
node 3 cpus: 12-15,44-47
node 3 size: 96765 MB
node 3 free: 95987 MB
node 4 cpus: 16-19,48-51
node 4 size: 96765 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 4 free: 96348 MB
node 5 cpus: 20-23,52-55
node 5 size: 96765 MB
node 5 free: 96347 MB
node 6 cpus: 24-27,56-59
node 6 size: 96765 MB
node 6 free: 96340 MB
node 7 cpus: 28-31,60-63
node 7 size: 96669 MB
node 7 free: 96140 MB
node distances:
node   0   1   2   3   4   5   6   7
  0:  10  12  12  12  32  32  32  32
  1:  12  10  12  12  32  32  32  32
  2:  12  12  10  12  32  32  32  32
  3:  12  12  12  10  32  32  32  32
  4:  32  32  32  32  10  12  12  12
  5:  32  32  32  32  12  10  12  12
  6:  32  32  32  32  12  12  10  12
  7:  32  32  32  32  12  12  12  10
```

9. /proc/meminfo

MemTotal: 792138692 kB

10. who -r

run-level 3 Jun 3 23:53

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autotast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=9444ad63-6600-41de-9db7-026811eaf134
splash=silent
mitigations=auto
quiet
security=apparmor

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 7:

current policy: frequency should be within 1.50 GHz and 4.20 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version

os-release SUSE Linux Enterprise Server 15 SP6

19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	3.5T	98G	3.4T	3%	/

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SD665 V3
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
12x SK Hynix HMC88AHB8A471N 32 GB 2 rank 6400
2x SK Hynix HMC88AHB8A472N 32 GB 2 rank 6400
10x SK Hynix HMC88AHB8A478N 32 GB 2 rank 6400

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: QGE139H-8.21
BIOS Date: 05/14/2025
BIOS Revision: 8.21
Firmware Revision: 13.10

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand

-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

502.gcc_r (continued):

-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m64 -std=c++14
-Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(4.20 GHz, AMD EPYC 9175F)

SPECrate®2017_int_base = 599

SPECrate®2017_int_peak = 609

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2025

Hardware Availability: Jul-2025

Software Availability: Oct-2024

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-F.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-F.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-03 18:00:10-0400.

Report generated on 2025-07-01 19:10:50 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-01.