



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

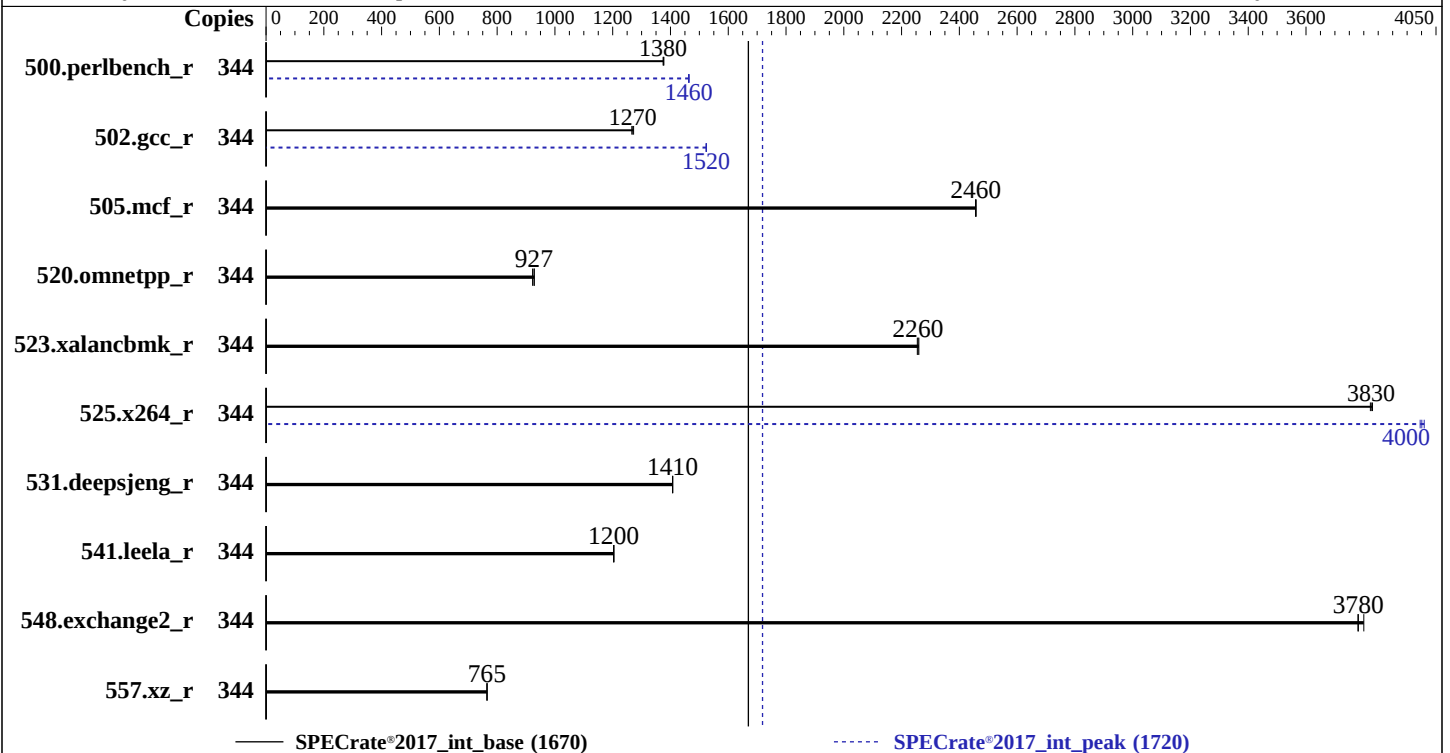

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-88/44B-M, running at 8000)
Storage: 1 x 1.6 TB PCIe NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Version 0601 released Jul-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	344	398	1370	<u>398</u>	<u>1380</u>	398	1380	344	<u>374</u>	<u>1460</u>	374	1460	374	1460
502.gcc_r	344	<u>384</u>	<u>1270</u>	383	1270	385	1270	344	<u>320</u>	<u>1520</u>	320	1520	319	1520
505.mcf_r	344	<u>226</u>	<u>2460</u>	226	2460	226	2460	344	<u>226</u>	<u>2460</u>	226	2460	226	2460
520.omnetpp_r	344	<u>487</u>	<u>927</u>	486	929	489	923	344	<u>487</u>	<u>927</u>	486	929	489	923
523.xalancbmk_r	344	161	2260	<u>161</u>	<u>2260</u>	161	2250	344	161	2260	<u>161</u>	<u>2260</u>	161	2250
525.x264_r	344	157	3830	<u>157</u>	<u>3830</u>	158	3820	344	<u>151</u>	<u>4000</u>	150	4010	151	4000
531.deepsjeng_r	344	<u>280</u>	<u>1410</u>	280	1410	280	1410	344	<u>280</u>	<u>1410</u>	280	1410	280	1410
541.leela_r	344	<u>473</u>	<u>1200</u>	473	1200	473	1200	344	<u>473</u>	<u>1200</u>	473	1200	473	1200
548.exchange2_r	344	<u>238</u>	<u>3780</u>	238	3780	237	3800	344	<u>238</u>	<u>3780</u>	238	3780	237	3800
557.xz_r	344	486	765	<u>486</u>	<u>765</u>	486	765	344	486	765	<u>486</u>	<u>765</u>	486	765

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/ic24u1/lib/intel64:/ic24u1/lib/ia32:/ic24u1/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
ENERGY_PERF_BIAS_CFG mode = Performance
Latency Optimized Mode = Enabled
Engine Boost = Aggressive
SR-IOV Support = Disabled
Page Policy = Adaptive
DCU Streamer Prefetcher = Disable
LLC dead line alloc = Disable

Sysinfo program /ic24u1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Jul 29 16:13:44 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
 2. w
16:13:44 up 3 min, 1 user, load average: 0.39, 0.64, 0.31

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	16:12	16.00s	0.96s	0.00s	/bin/bash ./rate.sh

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4125793
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4125793
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=344 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=172 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.036/temlogs/preenv.intrate.036.0.log --lognum 036.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u1
```

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) 6787P
vendor_id	: GenuineIntel
cpu family	: 6
model	: 173
stepping	: 1
microcode	: 0x10003c2
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores	: 86
siblings	: 172
2 physical ids (chips)	
344 processors (hardware threads)	
physical id 0: core ids 0-42,64-106	
physical id 1: core ids 0-42,64-106	
physical id 0: apicids 0-85,128-213	

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

physical id 1: apicids 256-341,384-469

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                344
On-line CPU(s) list:   0-343
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6787P
BIOS Model name:       Intel(R) Xeon(R) 6787P   CPU @ 2.00GHz
BIOS CPU family:       179
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    86
Socket(s):             2
Stepping:              1
CPU(s) scaling MHz:    23%
CPU max MHz:           3800.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                        vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                        rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                        umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                        avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                        pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                        arch_capabilities
Virtualization:        VT-x
L1d cache:             8.1 MiB (172 instances)
L1i cache:             10.8 MiB (172 instances)
L2 cache:              344 MiB (172 instances)
L3 cache:              672 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-42,172-214
NUMA node1 CPU(s):     43-85,215-257
NUMA node2 CPU(s):     86-128,258-300
NUMA node3 CPU(s):     129-171,301-343
Vulnerability Gather data sampling: Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-IBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-42,172-214
node 0 size: 257517 MB
node 0 free: 256488 MB
node 1 cpus: 43-85,215-257
node 1 size: 258025 MB
node 1 free: 257002 MB
node 2 cpus: 86-128,258-300
node 2 size: 257986 MB
node 2 free: 257067 MB
node 3 cpus: 129-171,301-343
node 3 size: 257944 MB
node 3 free: 256999 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1056230144 kB

10. who -r

run-level 3 Jul 29 16:11

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd-generate_opts snmpd snmptrapd svnserv systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 vncserver@
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet
video=1024x768

14. cpupower frequency-info
analyzing CPU 167:
current policy: frequency should be within 800 MHz and 3.80 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /ic24u1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 500G 78G 422G 16% /

21. /sys/devices/virtual/dmi/id
Vendor: ASUSTeK COMPUTER INC.
Product: RS720-E12-RS8G
Product Family: Server
Serial: ----

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Micron MTC40F2046S1HC88XDY TECCE 64 GB 1 rank 8800, configured at 8000

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends Inc.
BIOS Version: 0601
BIOS Date: 07/23/2025
BIOS Revision: 6.1

Compiler Version Notes

=====

C	502.gcc_r(peak)
---	-----------------

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
C      | 502.gcc_r(peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
C++    | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
Fortran | 548.exchange2_r(base, peak)
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E12-RS8G
(2.00 GHz, Intel Xeon 6787P)

SPECrate®2017_int_base = 1670

SPECrate®2017_int_peak = 1720

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2025

Hardware Availability: Jul-2025

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z14-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-29 04:13:43-0400.

Report generated on 2025-08-26 17:49:40 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-26.