



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

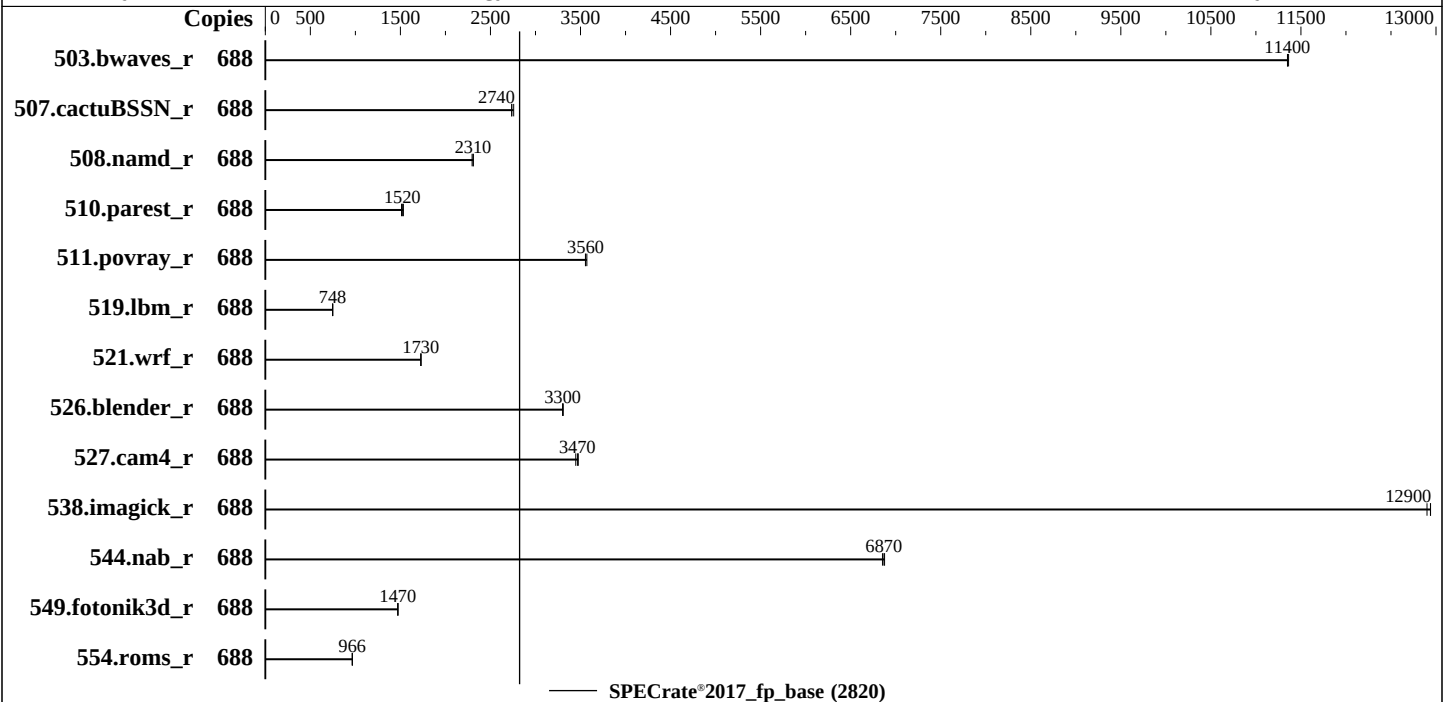

Hardware

CPU Name: Intel Xeon 6788P
Max MHz: 3800
Nominal: 2000
Enabled: 344 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 2 TB (32 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 1.92 TB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.51-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: BIOS Version RVE103X 1.10 released Jul-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	688	608	11400	<u>608</u>	<u>11400</u>	607	11400							
507.cactuBSSN_r	688	<u>318</u>	<u>2740</u>	316	2760	318	2740							
508.namd_r	688	<u>283</u>	<u>2310</u>	283	2310	285	2300							
510.parest_r	688	<u>1183</u>	<u>1520</u>	1174	1530	1190	1510							
511.povray_r	688	452	3550	450	3570	<u>452</u>	<u>3560</u>							
519.lbm_r	688	<u>970</u>	<u>748</u>	970	748	969	748							
521.wrf_r	688	<u>892</u>	<u>1730</u>	892	1730	892	1730							
526.blender_r	688	317	3310	<u>317</u>	<u>3300</u>	317	3300							
527.cam4_r	688	349	3450	<u>347</u>	<u>3470</u>	346	3480							
538.imagick_r	688	<u>132</u>	<u>12900</u>	133	12900	132	12900							
544.nab_r	688	<u>169</u>	<u>6870</u>	169	6850	168	6880							
549.fotonik3d_r	688	1821	1470	1823	1470	<u>1822</u>	<u>1470</u>							
554.roms_r	688	<u>1132</u>	<u>966</u>	1131	967	1132	966							

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Workload Profile set to General Computing - Max Performance

SNC set to Enabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Aug 7 03:03:59 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux

2. w
03:04:00 up 4 min, 1 user, load average: 3.12, 9.12, 4.66
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

From environment variable \$USER: root

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 8253528
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 8253528
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECCpu_1.01.sh
sh Run503-compliant-ic2024.1-lin-sapphirerapids-ratefp-base-smt-on-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=688 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=344 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=688 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=344 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.376/templogs/preenv.fprate.376.0.log --lognum 376.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6788P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003d0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 86
siblings       : 172
4 physical ids (chips)
688 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 2: core ids 0-42,64-106
physical id 3: core ids 0-42,64-106
physical id 0: apicids 0-85,128-213
physical id 1: apicids 256-341,384-469
physical id 2: apicids 512-597,640-725
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

physical id 3: apicids 768-853,896-981

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	688
On-line CPU(s) list:	0-687
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) 6788P
CPU family:	6
Model:	173
Thread(s) per core:	2
Core(s) per socket:	86
Socket(s):	4
Stepping:	1
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	16.1 MiB (344 instances)
L1i cache:	21.5 MiB (344 instances)
L2 cache:	688 MiB (344 instances)
L3 cache:	1.3 GiB (4 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-42, 344-386
NUMA node1 CPU(s):	43-85, 387-429
NUMA node2 CPU(s):	86-128, 430-472
NUMA node3 CPU(s):	129-171, 473-515
NUMA node4 CPU(s):	172-214, 516-558
NUMA node5 CPU(s):	215-257, 559-601
NUMA node6 CPU(s):	258-300, 602-644
NUMA node7 CPU(s):	301-343, 645-687
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	16.1M	12	Data	1	64	1	64
L1i	64K	21.5M	16	Instruction	1	64	1	64
L2	2M	688M	16	Unified	2	2048	1	64
L3	336M	1.3G	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-42,344-386
node 0 size: 257431 MB
node 0 free: 256582 MB
node 1 cpus: 43-85,387-429
node 1 size: 258025 MB
node 1 free: 257207 MB
node 2 cpus: 86-128,430-472
node 2 size: 257986 MB
node 2 free: 257175 MB
node 3 cpus: 129-171,473-515
node 3 size: 258025 MB
node 3 free: 257275 MB
node 4 cpus: 172-214,516-558
node 4 size: 258025 MB
node 4 free: 257305 MB
node 5 cpus: 215-257,559-601
node 5 size: 258025 MB
node 5 free: 257127 MB
node 6 cpus: 258-300,602-644
node 6 size: 258025 MB
node 6 free: 257251 MB
node 7 cpus: 301-343,645-687
node 7 size: 257865 MB
node 7 free: 256969 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 21 21 21 21 21 21
1: 12 10 21 21 21 21 21 21
2: 21 21 10 12 21 21 21 21
3: 21 21 12 10 21 21 21 21
4: 21 21 21 21 10 12 21 21
5: 21 21 21 21 12 10 21 21
6: 21 21 21 21 21 10 12
7: 21 21 21 21 21 21 12 10

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

MemTotal: 2112931224 kB

10. who -r
run-level 3 Aug 7 03:01

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix
purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=50860560-ae42-405b-bae3-a2b14754d476
splash=silent
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 127:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
-----
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs   1.8T   67G  1.7T   4% /
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR860 V4
Product Family:  ThinkSystem
Serial:          9876543210
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

```
Memory:
4x SK Hynix HMC94AHBRA275N 64 GB 2 rank 6400
7x SK Hynix HMC94AHBRA277N 64 GB 2 rank 6400
3x SK Hynix HMC94AHBRA281N 64 GB 2 rank 6400
2x SK Hynix HMC94AHBRA283N 64 GB 2 rank 6400
8x SK Hynix HMC94AHBRA480N 64 GB 2 rank 6400
3x SK Hynix HMC94AHBRA481N 64 GB 2 rank 6400
3x SK Hynix HMC94AHBRA486N 64 GB 2 rank 6400
2x SK Hynix HMC94AHBRA487N 64 GB 2 rank 6400
-----
```

```
-----
22. BIOS
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: RVE103X-1.10
BIOS Date: 07/17/2025
BIOS Revision: 1.10
Firmware Revision: 1.40

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V4
(2.0 GHZ, Intel Xeon 6788P)

SPECrate®2017_fp_base = 2820

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2025

Hardware Availability: Nov-2025

Software Availability: Jun-2025

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-F.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-F.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-06 15:03:59-0400.

Report generated on 2025-08-26 17:50:20 by CPU2017 PDF formatter v6716.

Originally published on 2025-08-26.