



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

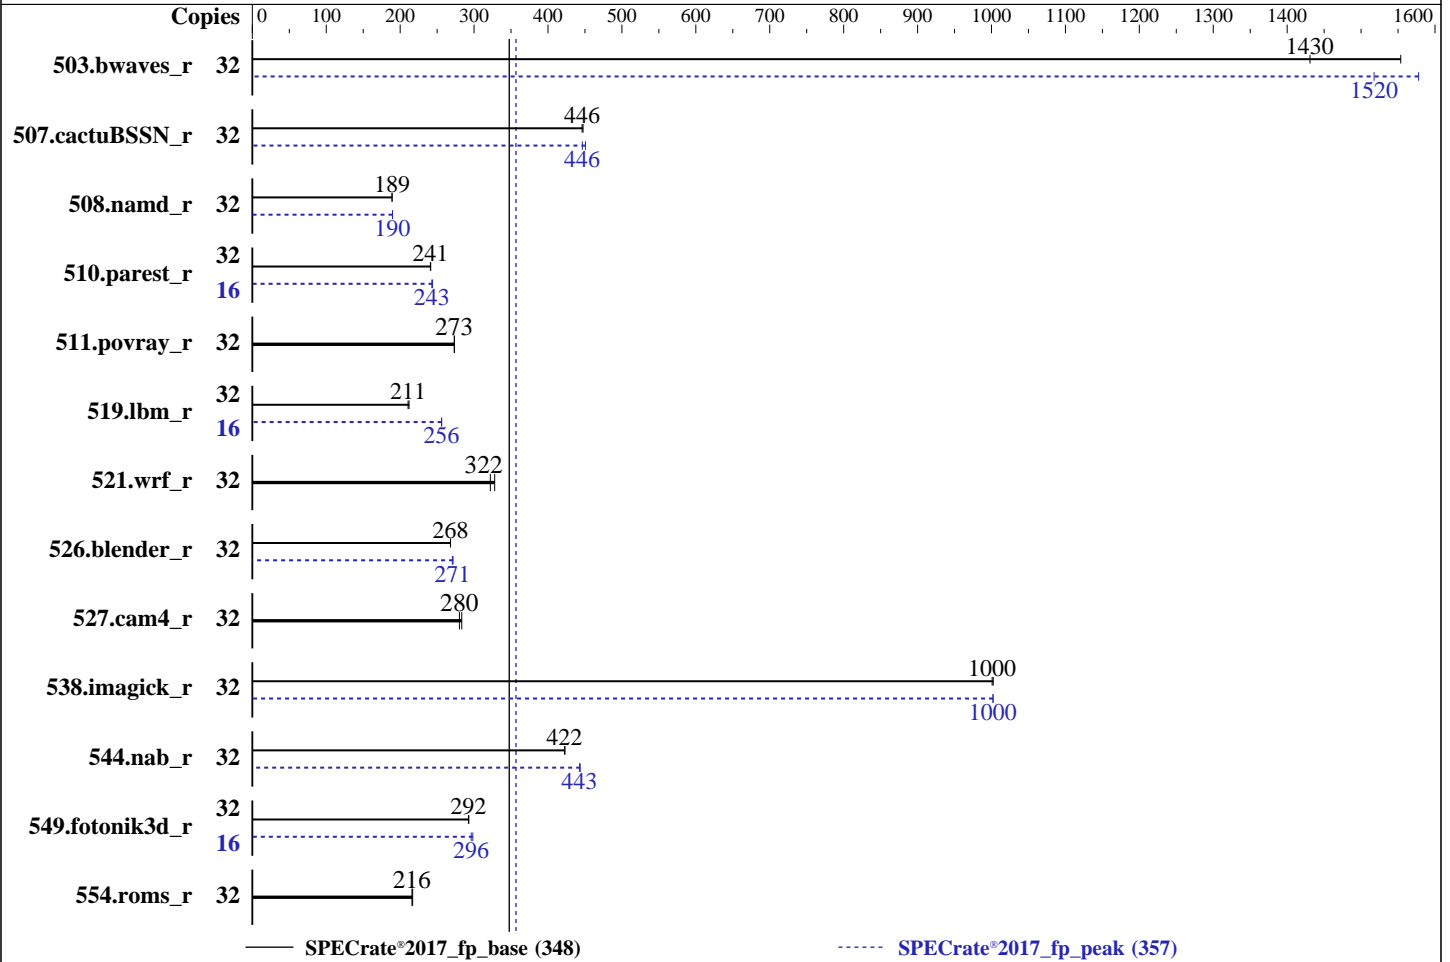

Hardware

CPU Name: AMD EPYC 9135
 Max MHz: 4300
 Nominal: 3650
 Enabled: 16 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
 Storage: 40 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
 6.8.0-62-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.6.3 released Jan-2026
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	207	1550	<u>224</u>	<u>1430</u>			32	203	1580	<u>211</u>	<u>1520</u>		
507.cactuBSSN_r	32	90.5	447	<u>90.8</u>	<u>446</u>			32	89.9	451	<u>90.7</u>	<u>446</u>		
508.namd_r	32	161	189	<u>161</u>	<u>189</u>			32	160	190	<u>160</u>	<u>190</u>		
510.parest_r	32	<u>347</u>	<u>241</u>	347	241			16	172	244	<u>172</u>	<u>243</u>		
511.povray_r	32	<u>274</u>	<u>273</u>	273	273			32	<u>274</u>	<u>273</u>	273	273		
519.lbm_r	32	<u>160</u>	<u>211</u>	159	212			16	<u>65.9</u>	<u>256</u>	65.8	256		
521.wrf_r	32	<u>223</u>	<u>322</u>	219	328			32	<u>223</u>	<u>322</u>	219	328		
526.blender_r	32	182	268	<u>182</u>	<u>268</u>			32	<u>180</u>	<u>271</u>	179	272		
527.cam4_r	32	198	283	<u>200</u>	<u>280</u>			32	198	283	<u>200</u>	<u>280</u>		
538.imagick_r	32	79.4	1000	<u>79.5</u>	<u>1000</u>			32	79.4	1000	<u>79.4</u>	<u>1000</u>		
544.nab_r	32	127	423	<u>127</u>	<u>422</u>			32	<u>122</u>	<u>443</u>	121	444		
549.fotonik3d_r	32	<u>427</u>	<u>292</u>	426	293			16	<u>211</u>	<u>296</u>	209	298		
554.roms_r	32	<u>235</u>	<u>216</u>	234	217			32	<u>235</u>	<u>216</u>	234	217		

SPECrate®2017_fp_base = **348**

SPECrate®2017_fp_peak = **357**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

```
Virtualization Technology : Disabled
  NUMA Nodes Per Socket : 4
    System Profile : Custom
      C-States : Disabled
        Memory Patrol Scrub : Disabled
PCI ASPM L1 Link Power Management : Disabled
  Periodic Directory Rinse Tuning : Blended
    Determinism Control : Manual
      Determinism Slider : Power Determinism
        Optimizer Mode : Enabled
          Adaptive Allocation : Enabled
            Dram Refresh Delay : Performance
              DIMM Self Healing -
                on Uncorrectable Memory Error : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLR4753-R4715 Thu Jan 15 15:47:54 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux SLR4753-R4715 6.8.0-62-generic #65-Ubuntu SMP PREEMPT_DYNAMIC Mon May 19 17:15:03 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
15:47:54 up 1 min, 1 user, load average: 0.11, 0.04, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 15:46 58.00s 1.16s 0.32s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 3093025
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.4_T17 --output_format
html,pdf,txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.4_T17 --output_format html,pdf,txt fprate
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Date: Jan-2026

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2026

Tested by: Dell Inc.

Software Availability: Jun-2025

Platform Notes (Continued)

```

runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-VERS=6.4_T17 --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9135 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00215a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 16
siblings       : 32
1 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27
physical id 0: apicids 0-7,16-23,32-39,48-55

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       AMD
Model name:            AMD EPYC 9135 16-Core Processor
BIOS Model name:      AMD EPYC 9135 16-Core Processor           CPU @ 3.6GHz
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             1
Stepping:              1
Frequency boost:      enabled
CPU(s) scaling MHz:   91%
CPU max MHz:           4305.8589
CPU min MHz:           1500.0000
BogoMIPS:              7289.37
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtsmp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

ibrs ibpb stibp ibrs_enhanced vmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca avx512_vp2intersect flush_lld debug_swap

L1d cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 16 MiB (16 instances)
L3 cache: 64 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	16	Unified	2	1024	1	64
L3	16M	64M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 192825 MB
node 0 free: 189703 MB
node 1 cpus: 4-7,20-23
node 1 size: 193488 MB
node 1 free: 193137 MB
node 2 cpus: 8-11,24-27
node 2 size: 193532 MB
node 2 free: 191755 MB
node 3 cpus: 12-15,28-31
node 3 size: 193487 MB
node 3 free: 193103 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

```
node distances:
node    0    1    2    3
 0:   10   12   12   12
 1:   12   10   12   12
 2:   12   12   10   12
 3:   12   12   12   10
```

```
-----
9. /proc/meminfo
   MemTotal:          791894196 kB
```

```
-----
10. who -r
    run-level 5 Jan 15 15:46
```

```
-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.8)
    Default Target   Status
    graphical        running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@ ssh systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysexit systemd-time-wait-sync upower
generated openipmi
indirect systemd-sysupdate systemd-sysupdate-reboot uidd
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-62-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
pcie_aspm=force
pcie_aspm.policy=powersupersaver
```

```
-----
14. cpupower frequency-info
analyzing CPU 13:
  current policy: frequency should be within 1.50 GHz and 3.65 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3650MHz
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Platform Notes (Continued)

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.4
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 40G 3.3G 37G 9% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R4715
Product Family: PowerEdge

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Platform Notes (Continued)

Serial: SLR4753

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

9x 80AD000080AD HMC94AHBRA277N 64 GB 2 rank 6400, configured at 5200
3x 80AD000080AD HMC94AHBRA480N 64 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.6.3
BIOS Date: 001/06/2026
BIOS Revision: 1.6

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2026
Hardware Availability: Mar-2026
Software Availability: Jun-2025

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -ldl

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlIBM -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlIBM -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlIBM -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

503.bwaves_r (continued):

-lamdalloc -ldl -lflang

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-Mrecursive -mllvm -reduce-array-computations=3

-fepilog-vectorization-of-inductions -fvector-transform

-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

-fstruct-layout=7 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -zopt

-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7

-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt

-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000

-faggressive-loop-transform -fvector-transform -fscalar-transform

-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc

-ldl -lflang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 348

PowerEdge R4715 (AMD EPYC 9135 16-Core Processor)

SPECrate®2017_fp_peak = 357

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2026

Hardware Availability: Mar-2026

Software Availability: Jun-2025

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-01-15 10:47:54-0500.

Report generated on 2026-03-19 11:54:03 by CPU2017 PDF formatter v6716.

Originally published on 2026-03-19.