CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R710 (3.8 GHz Intel Xeon processor, 2MB L2, 800MHz system bus)

SPECfp_rate2000 = 32.8

SPECfp_rate_base2000 = 32.6

SPEC license #: 97 | Tested by: Acer Incorporated | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Apr-2005

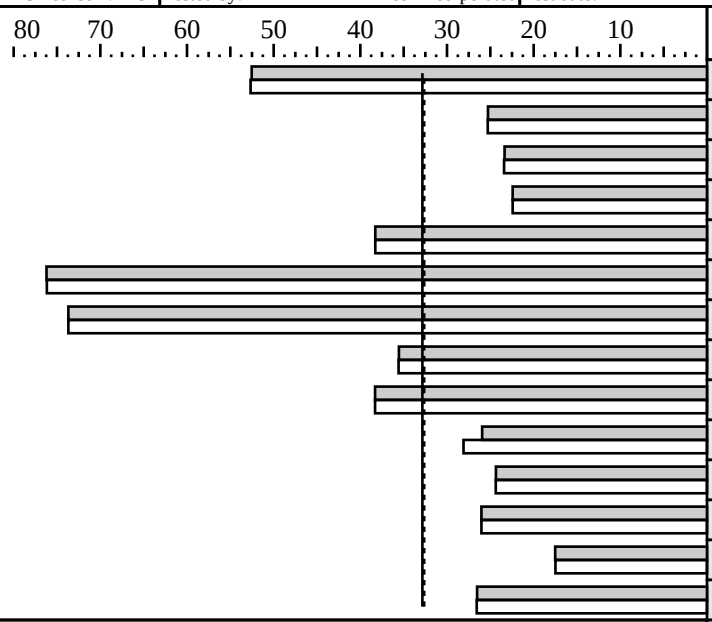

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	70.7	52.5	2	70.5	52.7
171.swim	2	285	25.3	2	284	25.3
172.mgrid	2	179	23.4	2	178	23.4
173.applu	2	217	22.4	2	217	22.4
177.mesa	2	84.9	38.3	2	84.9	38.3
178.galgel	2	88.3	76.2	2	88.3	76.2
179.art	2	81.9	73.7	2	81.9	73.7
183.equake	2	84.8	35.5	2	84.8	35.6
187.facerec	2	115	38.3	2	115	38.3
188.ammp	2	197	25.9	2	182	28.1
189.lucas	2	191	24.4	2	190	24.4
191.fma3d	2	187	26.0	2	187	26.0
200.sixtrack	2	146	17.5	2	146	17.5
301.apsi	2	227	26.5	2	227	26.6

Hardware

CPU:	Intel Xeon (3.8 GHz, 2MB L2, 800MHz system bus)
CPU MHz:	3800
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip(Hyper-Threading Technology Disable)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12KB(I) micro-ops + 16KB(D) on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	6 x 512MB ECC DDR2-400 SDRAM
Disk Subsystem:	1 x 18GB 10000RPM U320 SCSI HDD
Other Hardware:	

Software

Operating System:	Microsoft Windows Server 2003 Enterprise Edition (Build 3790)
Compiler:	Intel C++ 9.0 Build 20050430Z for IA32 and Fortran Compiler 9.0 Build 20050722Z for IA32 Microsoft Visual Studio .Net 2003(7.1.3091, for libraries) shlW32M.lib is SmartHeap Library Version 7.4 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran Programs :  -fast -Qansi_alias +FDO
Base for all C Programs: -fast +FDO shlw32M.lib
Portability:
178.galgel:   -FI /F32000000
192.fma3d:   Approved windowsdp src.alt used
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -fast -Oa -Qrcd -Qprof_gen shlw32M.lib
187.facerec:  basepeak=yes
188.ammp:     -Oa -QxP
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
189.lucas:    -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
Enable hardware prefetching and adjacent cache line prefetch BIOS setting
Product description located at http://www.acer.com
```