



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 47.3

Servidor Itautec LX211 (Intel Xeon E5310)

SPECint_rate_base2006 = 47.3

CPU2006 license: 9001


Test date: Feb-2007

Test sponsor: Itautec

Hardware Availability: Feb-2007

Tested by: Itautec

Software Availability: May-2006

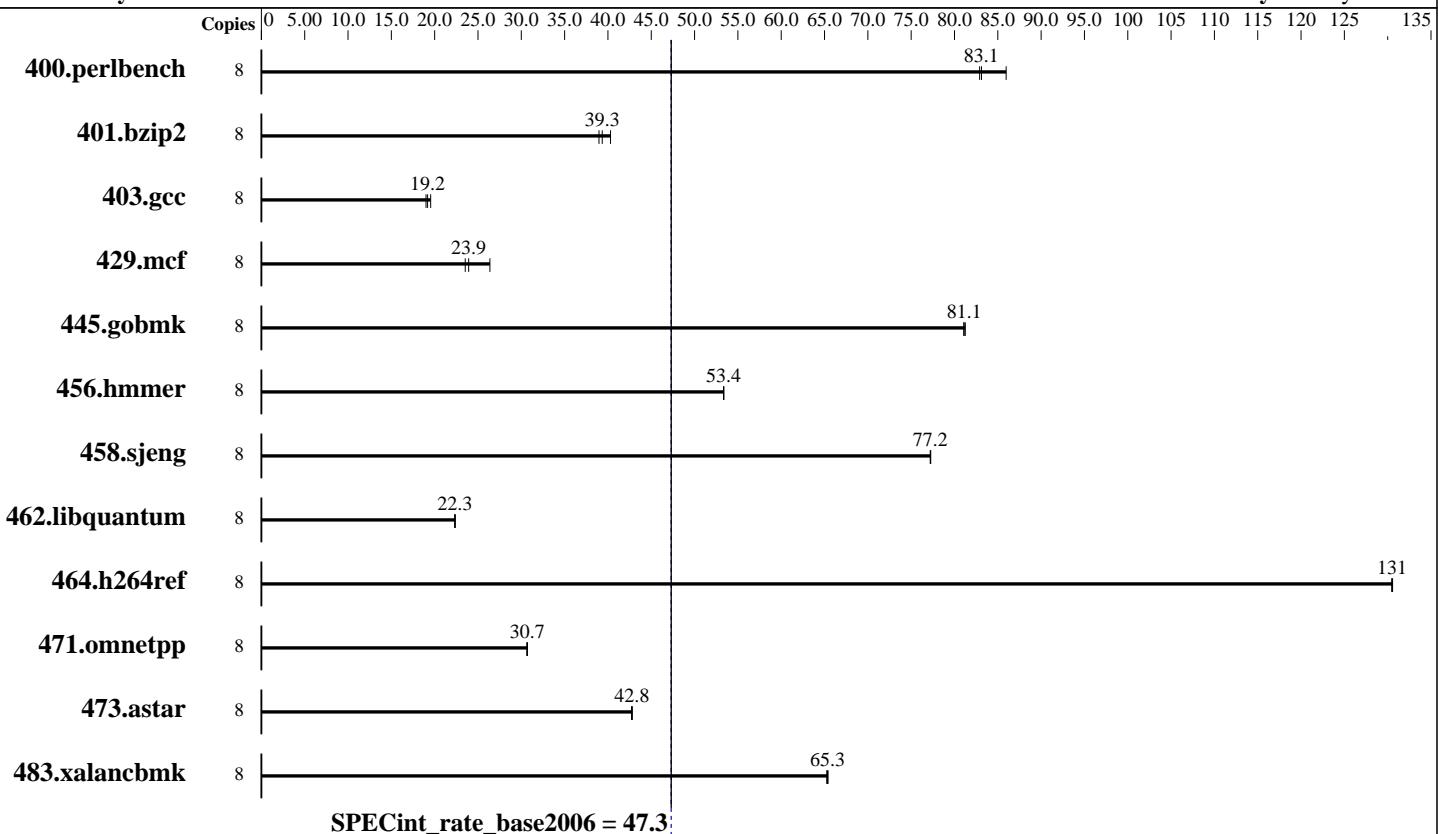

Hardware

CPU Name: Intel Xeon E5310
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1-2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB L1+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 6 GB (6x1GB DDR2-RAM PC2-5300F CAS 5-5-5)
 Disk Subsystem: 120 GB SATA, 7200RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition + SP1 (32-bit)
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Package ID W_CC_C_9.1.025 Build no 20060519Z
 Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: Microquill SmartHeap Library v.8.0 for SMP



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint rate2006 = 47.3

Servidor Itautec LX211 (Intel Xeon E5310)

SPECint_rate_base2006 = 47.3

CPU2006 license: 9001

Test date: Feb-2007

Test sponsor: Itautec

Hardware Availability: Feb-2007

Tested by: Itautec

Software Availability: May-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	909	86.0	940	83.1	943	82.9	8	909	86.0	940	83.1	943	82.9
401.bzip2	8	1981	39.0	1916	40.3	1962	39.3	8	1981	39.0	1916	40.3	1962	39.3
403.gcc	8	3389	19.0	3296	19.5	3357	19.2	8	3389	19.0	3296	19.5	3357	19.2
429.mcf	8	2766	26.4	3101	23.5	3050	23.9	8	2766	26.4	3101	23.5	3050	23.9
445.gobmk	8	1035	81.1	1033	81.2	1035	81.1	8	1035	81.1	1033	81.2	1035	81.1
456.hmmer	8	1399	53.3	1398	53.4	1399	53.4	8	1399	53.3	1398	53.4	1399	53.4
458.sjeng	8	1253	77.3	1254	77.2	1254	77.2	8	1253	77.3	1254	77.2	1254	77.2
462.libquantum	8	7430	22.3	7421	22.3	7406	22.4	8	7430	22.3	7421	22.3	7406	22.4
464.h264ref	8	1357	130	1356	131	1357	131	8	1357	130	1356	131	1357	131
471.omnetpp	8	1628	30.7	1628	30.7	1632	30.6	8	1628	30.7	1628	30.7	1632	30.6
473.astar	8	1312	42.8	1314	42.7	1313	42.8	8	1312	42.8	1314	42.7	1313	42.8
483.xalancbmk	8	846	65.3	845	65.3	844	65.4	8	846	65.3	845	65.3	844	65.4

Results appear in the order in which they were run. **Bold underlined** text indicates a median measurement.

Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC _ CPU NO INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:

-fast /F512000000 shlSMPMt.lib

-link /FORCE:MULTIPLE

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlSMPMt.lib  
      -link /FORCE:MULTIPLE
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint_rate2006 = 47.3

Servidor Itaute LX211 (Intel Xeon E5310)

SPECint_rate_base2006 = 47.3

CPU2006 license: 9001

Test date: Feb-2007

Test sponsor: Itaute

Hardware Availability: Feb-2007

Tested by: Itaute

Software Availability: May-2006

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Optimization Flags

C benchmarks:

400.perlbench: basepeak = yes

401.bzip2: basepeak = yes

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hammer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaute-ic91-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaute-ic91-flags.20090714.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 47.3

Servidor Itautec LX211 (Intel Xeon E5310)

SPECint_rate_base2006 = 47.3

CPU2006 license: 9001

Test date: Feb-2007

Test sponsor: Itautec

Hardware Availability: Feb-2007

Tested by: Itautec

Software Availability: May-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:31:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 March 2007.