



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 2290

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 19


Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

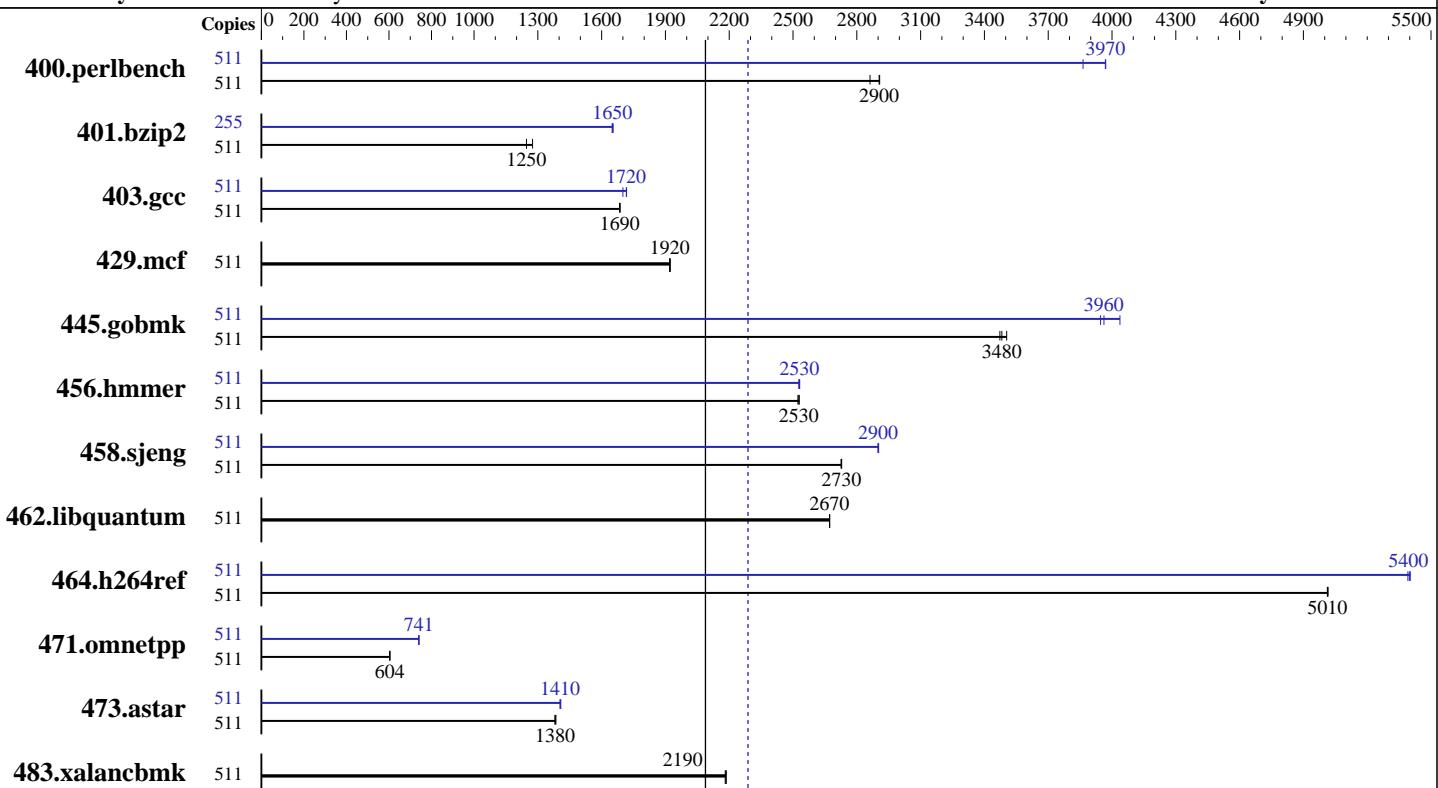

Hardware		Software
CPU Name:	SPARC64 VII	Operating System: Solaris 10 5/08 with Patch 137111-03
CPU Characteristics:		Compiler: Sun Studio 12 with patches 124867-06, 124861-07, 124863-05 (see patch information below)
CPU MHz:	2520	Auto Parallel: No
FPU:	Integrated	File System: ufs
CPU(s) enabled:	256 cores, 64 chips, 4 cores/chip, 2 threads/core	System State: Default
CPU(s) orderable:	1 to 16 CMUs; each CMU contains 2 or 4 chips	Base Pointers: 32-bit
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers: 32-bit
Secondary Cache:	6 MB I+D on chip per chip	Other Software: None
L3 Cache:	None	
Other Cache:	None	
Memory:	1 TB (512 x 2 GB)	
Disk Subsystem:	12 TB RAID 0 Solaris Volume 24 x 500 GB 15000 RPM disk Stripe interlace size 128Kbytes	
Other Hardware:	None	



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 2290

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	511	1744	2860	1717	2910	1719	2900	511	1292	3860	1257	3970	1258	3970
401.bzip2	511	3867	1280	3955	1250	3956	1250	255	1491	1650	1488	1650	1492	1650
403.gcc	511	2442	1680	2440	1690	2439	1690	511	2420	1700	2397	1720	2395	1720
429.mcf	511	2424	1920	2426	1920	2427	1920	511	2424	1920	2426	1920	2427	1920
445.gobmk	511	1529	3500	1544	3470	1540	3480	511	1353	3960	1358	3950	1328	4040
456.hmmer	511	1886	2530	1890	2520	1885	2530	511	1887	2530	1883	2530	1884	2530
458.sjeng	511	2267	2730	2266	2730	2268	2730	511	2131	2900	2132	2900	2130	2900
462.libquantum	511	3962	2670	3963	2670	3963	2670	511	3962	2670	3963	2670	3963	2670
464.h264ref	511	2254	5020	2256	5010	2255	5010	511	2095	5400	2093	5400	2098	5390
471.omnetpp	511	5285	604	5296	603	5287	604	511	4315	740	4312	741	4312	741
473.astar	511	2590	1380	2597	1380	2598	1380	511	2552	1410	2548	1410	2554	1400
483.xalancbmk	511	1614	2190	1614	2190	1617	2180	511	1614	2190	1614	2190	1617	2180

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Environment Variable Settings:

```
export LD_PRELOAD=mpss.so.1:madv.so.1
export MPSSHEAP=4MB
export MPSSSTACK=4MB
    Requests system to use 4 MB pages when possible.
export MADV access_lwp
    access_lwp requests that the next light weight process to touch
    the specified address range will access it most heavily.
ulimit -s 131072 was used to limit the space consumed
    by the stack (making more space available for the heap)
```

System Tunables (/etc/system parameters):
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 2290

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Operating System Notes (Continued)

autoup=200
Causes pages older than the listed number of seconds to
be written by fsflush.

lpg_alloc_prefer=1
Set lgroup page allocation to strongly prefer local pages

Other System Settings:

The webconsole service was turned off using
svcadm disable webconsole

The SPEC toolset was bound to processors 1-511 using processor sets:

```
psrset -c 1-511  
psrset -e 1 ksh
```

Platform Notes

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M9000 Server.
Note that the Sun SPARC Enterprise M9000 and Fujitsu SPARC Enterprise
M9000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_SPARC  
403.gcc: -DSPEC_CPU_SOLARIS  
462.libquantum: -DSPEC_CPU_SOLARIS  
483.xalancbmk: -DSPEC_CPU_SOLARIS
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 2290

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Base Optimization Flags

C benchmarks:

```
-fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch_level=1  
-xalias_level=std -ll2amm
```

C++ benchmarks:

```
-library=stlport4 -fast -xipo=2 -xpagesize=4M -fma=fused  
-xprefetch_level=2 -xalias_level=compatible -ll2amm -lfast
```

Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xpagesize=4M -fma=fused -xalias_level=std -xrestrict  
-xprefetch=no -lfast -ll2amm
```

```
401.bzip2: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xpagesize=4M -fma=fused -xalias_level=strong  
-xprefetch=latx:5 -ll2amm
```

```
403.gcc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xpagesize=4M -fma=fused -xalias_level=std -ll2amm
```

429.mcf: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECint_rate2006 = 2290

Fujitsu SPARC Enterprise M9000

SPECint_rate_base2006 = 2090

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Peak Optimization Flags (Continued)

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=std -xrestrict
-ll2amm

456.hummer: Same as 403.gcc

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -ll2amm

462.libquantum: basepeak = yes

464.h264ref: Same as 403.gcc

C++ benchmarks:

471.omnetpp: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible -ll2amm

473.astar: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xalias_level=compatible
-xprefetch=latx:3 -lfast -ll2amm

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 18:46:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 August 2008.