SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2356, 2.3 GHz)

SPECint®_rate2006 = 99.1

SPECint_rate_base2006 = 84.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: Jun-2008

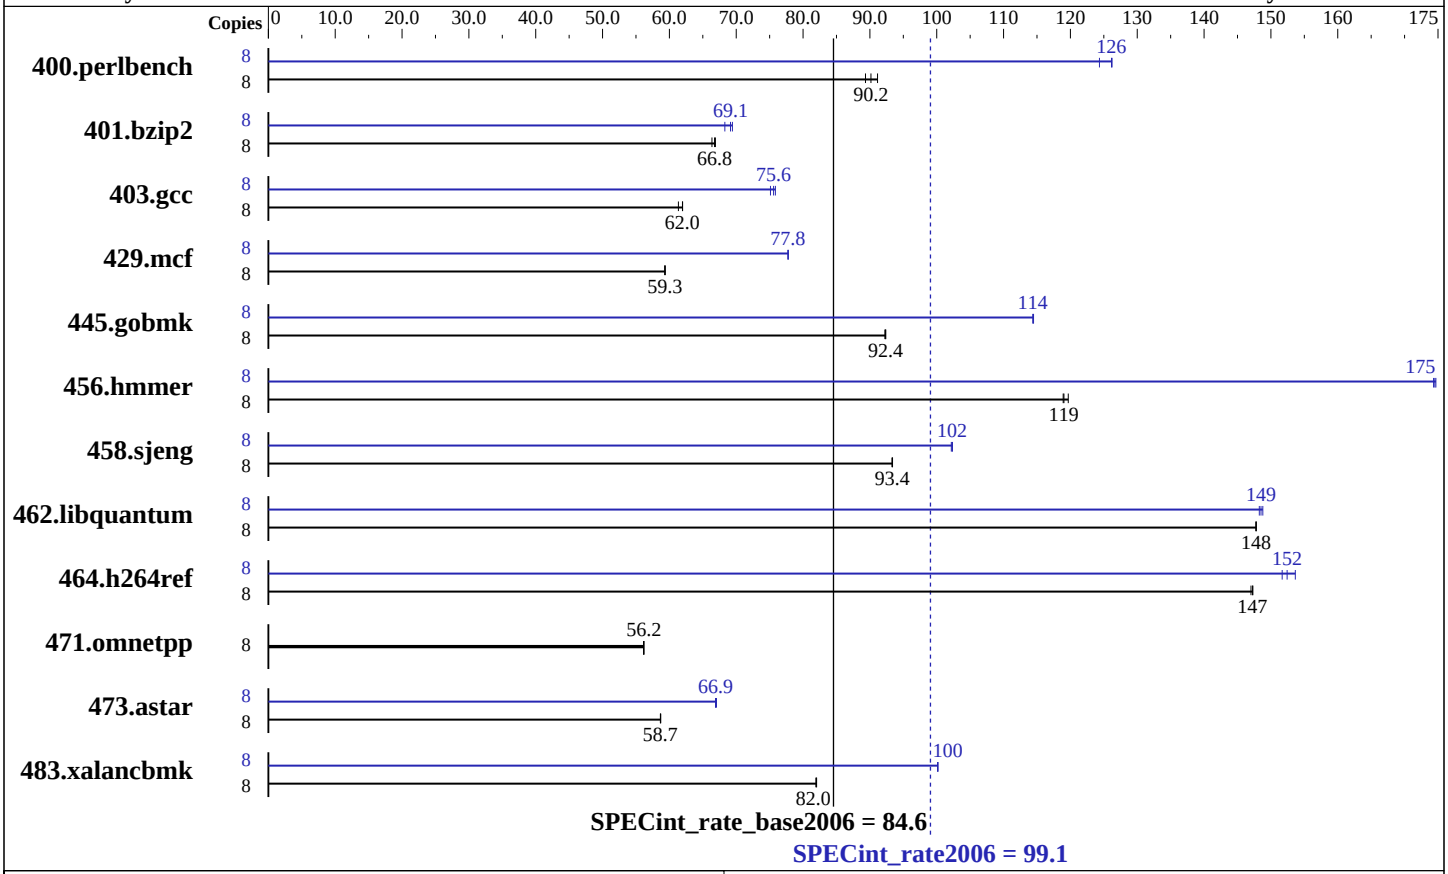

Hardware

CPU Name:	AMD Opteron 2356
CPU Characteristics:	
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (4 x 4GB, DDR2-667, CL5)
Disk Subsystem:	1 x 73GB 2.5" SAS 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2356, 2.3 GHz)

SPECint_rate2006 = 99.1

SPECint_rate_base2006 = 84.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	875	89.3	858	91.1	**867**	**90.2**	8	629	124	**620**	**126**	619	126
401.bzip2	8	1154	66.9	1163	66.4	**1156**	**66.8**	8	1130	68.3	1112	69.4	**1117**	**69.1**
403.gcc	8	**1039**	**62.0**	1050	61.3	1039	62.0	8	**852**	**75.6**	857	75.1	849	75.9
429.mcf	8	1230	59.3	1229	59.4	**1230**	**59.3**	8	938	77.8	**938**	**77.8**	938	77.8
445.gobmk	8	909	92.4	**909**	**92.4**	910	92.2	8	734	114	733	114	**734**	**114**
456.hmmer	8	628	119	624	120	**627**	**119**	8	428	174	427	175	**428**	**175**
458.sjeng	8	1038	93.3	**1037**	**93.4**	1037	93.4	8	**946**	**102**	947	102	946	102
462.libquantum	8	1122	148	**1122**	**148**	1121	148	8	1114	149	**1116**	**149**	1118	148
464.h264ref	8	1202	147	**1202**	**147**	1204	147	8	1152	154	**1161**	**152**	1167	152
471.omnetpp	8	890	56.2	**890**	**56.2**	891	56.1	8	890	56.2	**890**	**56.2**	891	56.1
473.astar	8	957	58.7	957	58.7	**957**	**58.7**	8	838	67.0	**839**	**66.9**	839	66.9
483.xalancbmk	8	674	81.9	673	82.0	**673**	**82.0**	8	**551**	**100**	551	100	551	100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
mount -t hugetlbfs nodev /mnt/hugepages
'ulimit -l 2097152'  was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-w -Mipa=jobs:4`

C++ benchmarks:
`-w -Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks (except as noted below):
`pgcc`

400.perlbench: `pathcc`

403.gcc: `pathcc`

445.gobmk: `pathcc`

C++ benchmarks (except as noted below):
`pathCC`

471.omnetpp: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w -Mipa=jobs:4`(pass 2)

400.perlbench: `No flags used`

401.bzip2: `-w`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w -Mipa=jobs:4`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:21:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.