



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 93.4

Supermicro X7DWN (Intel Xeon X5482)

SPECfp_rate_base2006 = 85.4

CPU2006 license: 13


Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

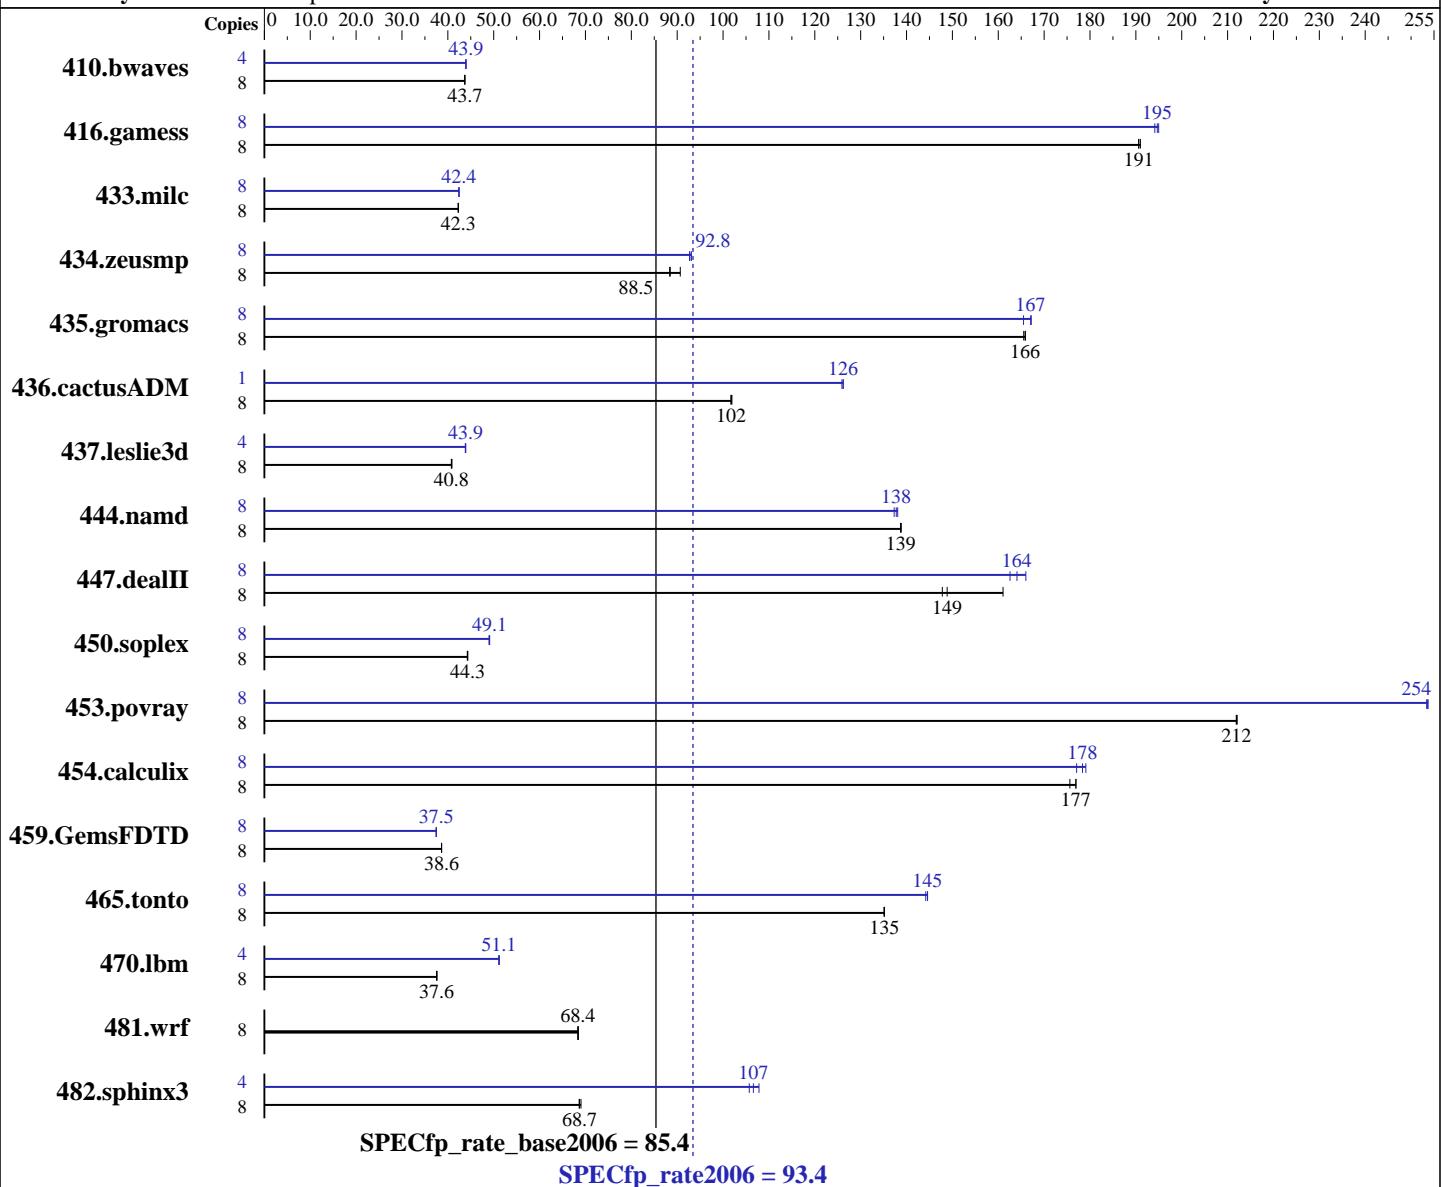

Hardware

CPU Name: Intel Xeon X5482
 CPU Characteristics:
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSe Linux SLES10 SP2
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 93.4

Supermicro X7DWN (Intel Xeon X5482)

SPECfp_rate_base2006 = 85.4

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB(8x2GB Hynix DDR2 6400F, CL5-5-5, ECC)
Disk Subsystem: Seagate 80 GB SATA, 7200 RPM
Other Hardware: None

Other Software: Microquill SmartHeap V8.1
Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	2490	43.7	2487	43.7	2487	43.7	4	<u>1237</u>	43.9	1237	43.9	1237	44.0
416.gamess	8	822	191	820	191	822	191	8	803	195	807	194	805	195
433.milc	8	1737	42.3	1737	42.3	1737	42.3	8	1731	42.4	1731	42.4	1731	42.4
434.zeusmp	8	824	88.4	823	88.5	803	90.7	8	785	92.8	785	92.7	782	93.1
435.gromacs	8	345	166	344	166	344	166	8	342	167	342	167	345	166
436.cactusADM	8	940	102	938	102	939	102	1	94.7	126	94.7	126	94.9	126
437.leslie3d	8	1839	40.9	1845	40.8	1844	40.8	4	858	43.8	857	43.9	857	43.9
444.namd	8	463	139	462	139	462	139	8	465	138	466	138	467	137
447.dealII	8	568	161	619	148	615	149	8	563	163	551	166	558	164
450.soplex	8	1505	44.3	1505	44.3	1508	44.2	8	1362	49.0	1359	49.1	1358	49.1
453.povray	8	201	212	201	212	201	212	8	168	254	168	254	168	253
454.calculix	8	373	177	376	176	373	177	8	369	179	370	178	373	177
459.GemsFDTD	8	2196	38.7	2198	38.6	2198	38.6	8	2264	37.5	2265	37.5	2266	37.5
465.tonto	8	583	135	582	135	582	135	8	544	145	546	144	545	145
470.lbm	8	2925	37.6	2924	37.6	2924	37.6	4	1073	51.2	1075	51.1	1075	51.1
481.wrf	8	1308	68.3	1306	68.4	1307	68.4	8	1308	68.3	1306	68.4	1307	68.4
482.sphinx3	8	2269	68.7	2272	68.6	2259	69.0	4	731	107	723	108	737	106

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex and 482.sphinx3, at peak, are compiled in 32-bit mode taskset was used to bind processes to cores except for 436.cactusADM peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 93.4

Supermicro X7DWN (Intel Xeon X5482)

SPECfp_rate_base2006 = 85.4

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 93.4

Supermicro X7DWN (Intel Xeon X5482)

SPECfp_rate_base2006 = 85.4

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 93.4

Supermicro X7DWN (Intel Xeon X5482)

SPECfp_rate_base2006 = 85.4

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xsse4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -Obo -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -Obo -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 93.4

Supermicro X7DWN (Intel Xeon X5482)

SPECfp_rate_base2006 = 85.4

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:59:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 October 2008.