



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint®_rate2006 = 88.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECint_rate_base2006 = 83.1

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2008

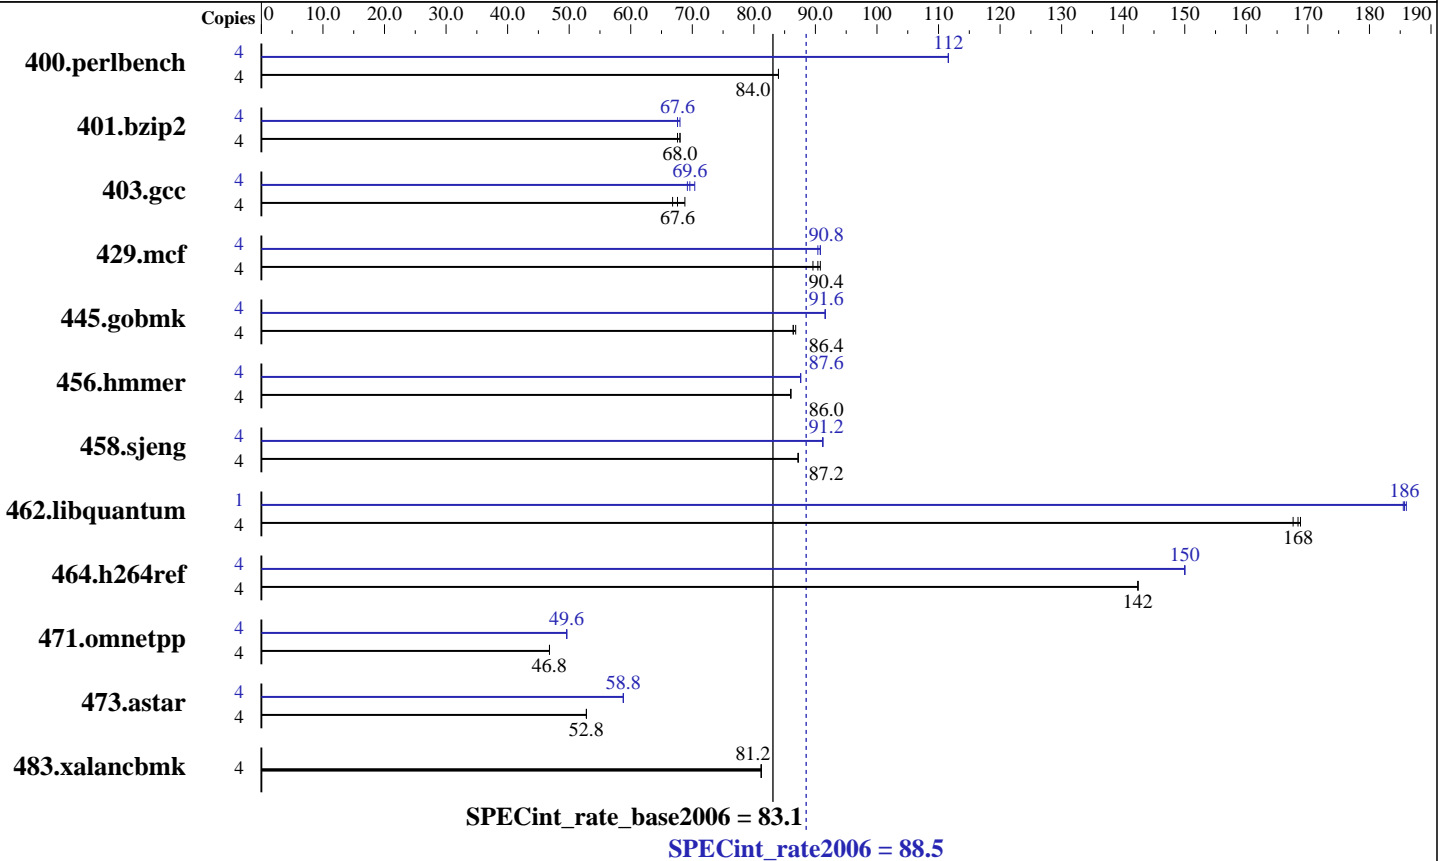

Hardware

CPU Name: Intel Core 2 Extreme QX9770
 CPU Characteristics:
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4 x 1GB Corsair CM3X1024-1333C9DHX DDR3-1333 CL9)
 Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive
 Other Hardware: None

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None
 SmartHeap Library Version 8.1 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 88.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECint_rate_base2006 = 83.1

CPU2006 license: 13

Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Apr-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	466	84.0	465	84.0	466	84.0	4	350	112	350	112	350	112
401.bzip2	4	573	67.6	567	68.0	567	68.0	4	569	68.0	572	67.6	571	67.6
403.gcc	4	467	68.8	478	67.6	481	66.8	4	464	69.6	466	69.2	458	70.4
429.mcf	4	403	90.8	408	89.6	404	90.4	4	402	90.8	402	90.8	403	90.4
445.gobmk	4	485	86.4	485	86.4	484	86.8	4	458	91.6	458	91.6	458	91.6
456.hammer	4	434	86.0	435	86.0	435	86.0	4	425	87.6	425	87.6	425	87.6
458.sjeng	4	555	87.2	555	87.2	555	87.2	4	531	91.2	531	91.2	532	91.2
462.libquantum	4	491	169	494	168	493	168	1	112	186	112	186	111	186
464.h264ref	4	621	142	621	142	621	142	4	590	150	590	150	590	150
471.omnetpp	4	532	46.8	532	46.8	533	46.8	4	503	49.6	504	49.6	503	49.6
473.astar	4	531	52.8	531	52.8	531	52.8	4	476	58.8	477	58.8	477	58.8
483.xalancbmk	4	340	81.2	339	81.2	340	81.2	4	340	81.2	339	81.2	340	81.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 The system bus runs at 1600 MHz
 System was configured with nVidia GTX 280 discrete graphics card
 Binaries were built on Windows Vista Ultimate (32-bit)
 OMP_NUM_THREADS set to number of logical processors as seen by the OS
 KMP_AFFINITY set to physical,0
 submit disabled for 462.libquantum peak

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qc99

C++ benchmarks:
 icl -Qvc9



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 88.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECint_rate_base2006 = 83.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2008

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
C++ benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99
C++ benchmarks:
icl -Qvc9

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:
400.perlbench: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 88.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECint_rate_base2006 = 83.1

CPU2006 license: 13

Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Apr-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

401.bzip2: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
/F512000000

458.sjeng: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel -Qpar-runtime-control -Qvec-guard-write
/F512000000

464.h264ref: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 88.5

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECint_rate_base2006 = 83.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.html>
<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.xml>
<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:19:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 November 2008.