



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>2006 = 16.7

PowerEdge 1950 III (Intel Xeon E5205, 1.86 GHz)

SPECfp\_base2006 = 16.0

CPU2006 license: 55


Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

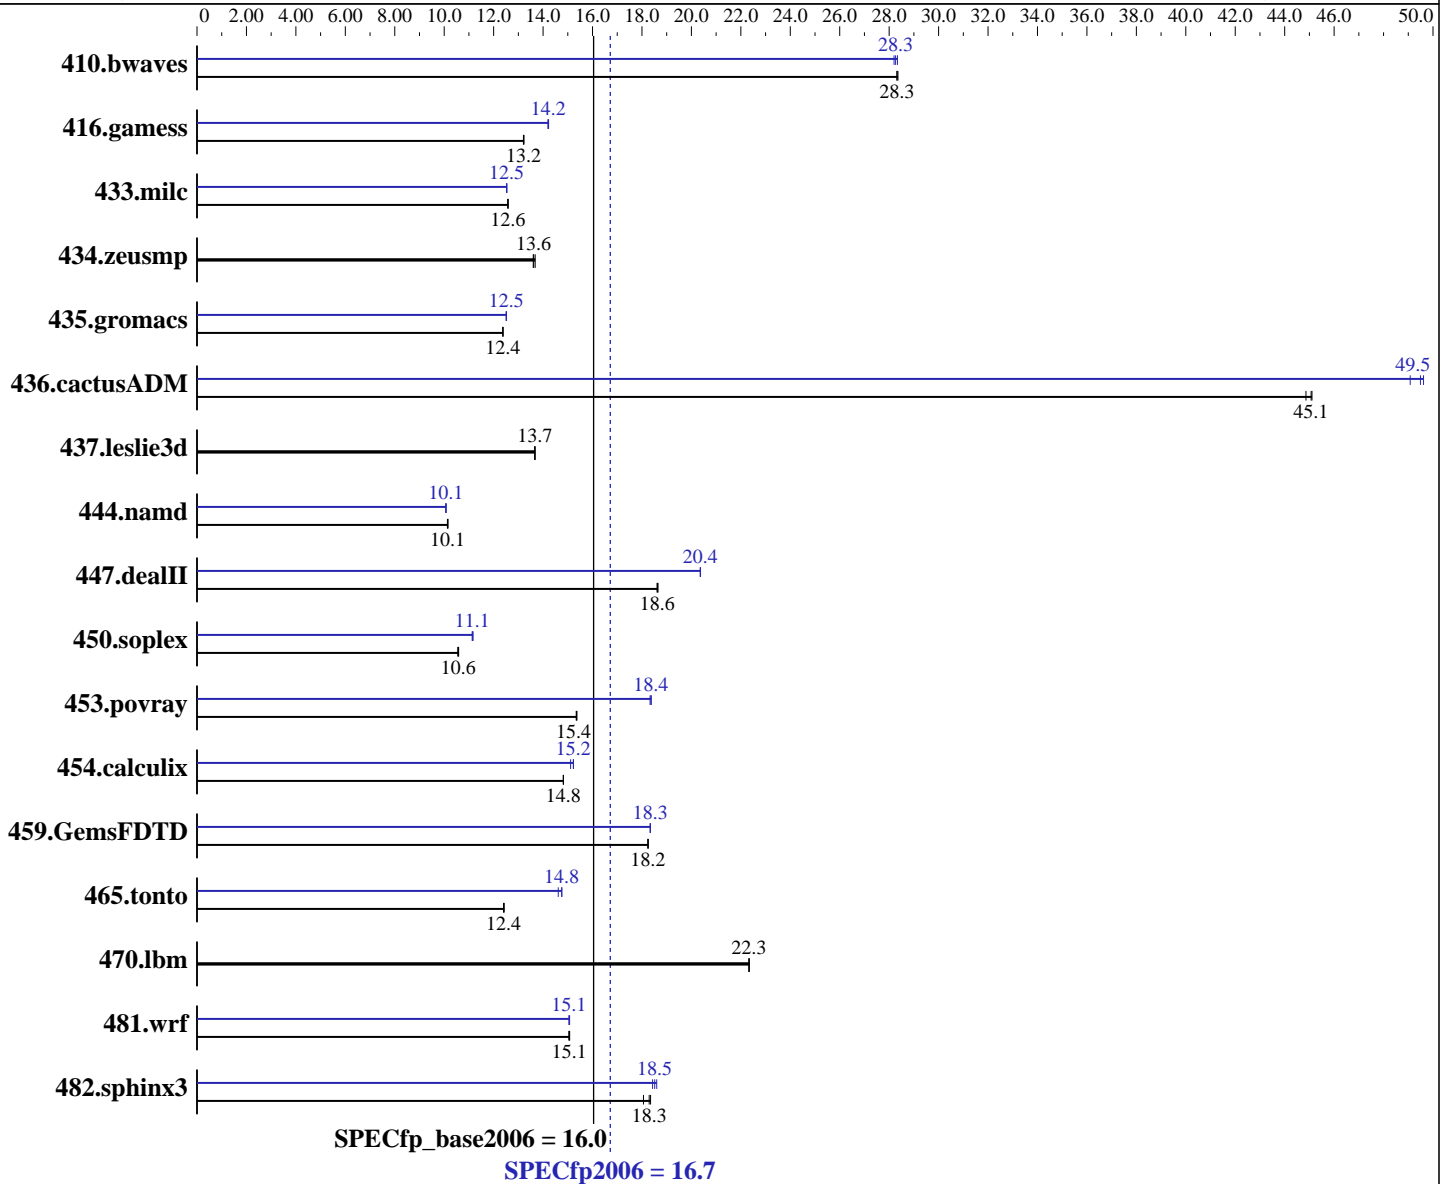

### Hardware

CPU Name: Intel Xeon E5205  
 CPU Characteristics:  
 CPU MHz: 1866  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 16.7

PowerEdge 1950 III (Intel Xeon E5205, 1.86 GHz)

SPECfp\_base2006 = 16.0

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 x 2 GB 667 MHz ECC CL5 FB-DIMM)  
Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	479	28.4	480	28.3	<b>480</b>	<b>28.3</b>	<u>481</u>	<u>28.3</u>	482	28.2	480	28.3
416.gamess	1483	13.2	<b>1482</b>	<b>13.2</b>	1480	13.2	<u>1378</u>	<u>14.2</u>	1377	14.2	1379	14.2
433.milc	730	12.6	<b>730</b>	<b>12.6</b>	729	12.6	732	12.5	733	12.5	<b>733</b>	<b>12.5</b>
434.zeusmp	669	13.6	<b>668</b>	<b>13.6</b>	665	13.7	669	13.6	<b>668</b>	<b>13.6</b>	665	13.7
435.gromacs	<b>577</b>	<b>12.4</b>	577	12.4	577	12.4	571	12.5	570	12.5	<b>571</b>	<b>12.5</b>
436.cactusADM	266	44.9	265	45.1	<b>265</b>	<b>45.1</b>	243	49.1	<b>241</b>	<b>49.5</b>	241	49.6
437.leslie3d	687	13.7	688	13.7	<b>688</b>	<b>13.7</b>	687	13.7	688	13.7	<b>688</b>	<b>13.7</b>
444.namd	790	10.2	792	10.1	<b>791</b>	<b>10.1</b>	797	10.1	796	10.1	<b>796</b>	<b>10.1</b>
447.dealII	<b>614</b>	<b>18.6</b>	613	18.7	615	18.6	562	20.4	<b>562</b>	<b>20.4</b>	562	20.4
450.soplex	788	10.6	<b>789</b>	<b>10.6</b>	791	10.5	<b>749</b>	<b>11.1</b>	749	11.1	747	11.2
453.povray	<b>346</b>	<b>15.4</b>	347	15.3	346	15.4	290	18.4	<b>290</b>	<b>18.4</b>	290	18.3
454.calculix	556	14.8	557	14.8	<b>557</b>	<b>14.8</b>	546	15.1	<b>542</b>	<b>15.2</b>	542	15.2
459.GemsFDTD	581	18.3	582	18.2	<b>581</b>	<b>18.2</b>	579	18.3	578	18.3	<b>578</b>	<b>18.3</b>
465.tonto	792	12.4	794	12.4	<b>793</b>	<b>12.4</b>	667	14.8	<b>667</b>	<b>14.8</b>	673	14.6
470.lbm	615	22.3	<b>615</b>	<b>22.3</b>	615	22.3	615	22.3	<b>615</b>	<b>22.3</b>	615	22.3
481.wrf	<b>741</b>	<b>15.1</b>	743	15.0	741	15.1	<b>742</b>	<b>15.1</b>	741	15.1	742	15.1
482.sphinx3	<b>1065</b>	<b>18.3</b>	1079	18.1	1062	18.3	<b>1053</b>	<b>18.5</b>	1058	18.4	1048	18.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## General Notes

OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 200M

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 16.7

PowerEdge 1950 III (Intel Xeon E5205, 1.86 GHz)

SPECfp\_base2006 = 16.0

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 16.7

PowerEdge 1950 III (Intel Xeon E5205, 1.86 GHz)

SPECfp\_base2006 = 16.0

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 16.7

PowerEdge 1950 III (Intel Xeon E5205, 1.86 GHz)

SPECfp\_base2006 = 16.0

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-  
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch  
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 16.7

PowerEdge 1950 III (Intel Xeon E5205, 1.86 GHz)

SPECfp\_base2006 = 16.0

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.05.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:54:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 November 2008.