



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55


Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

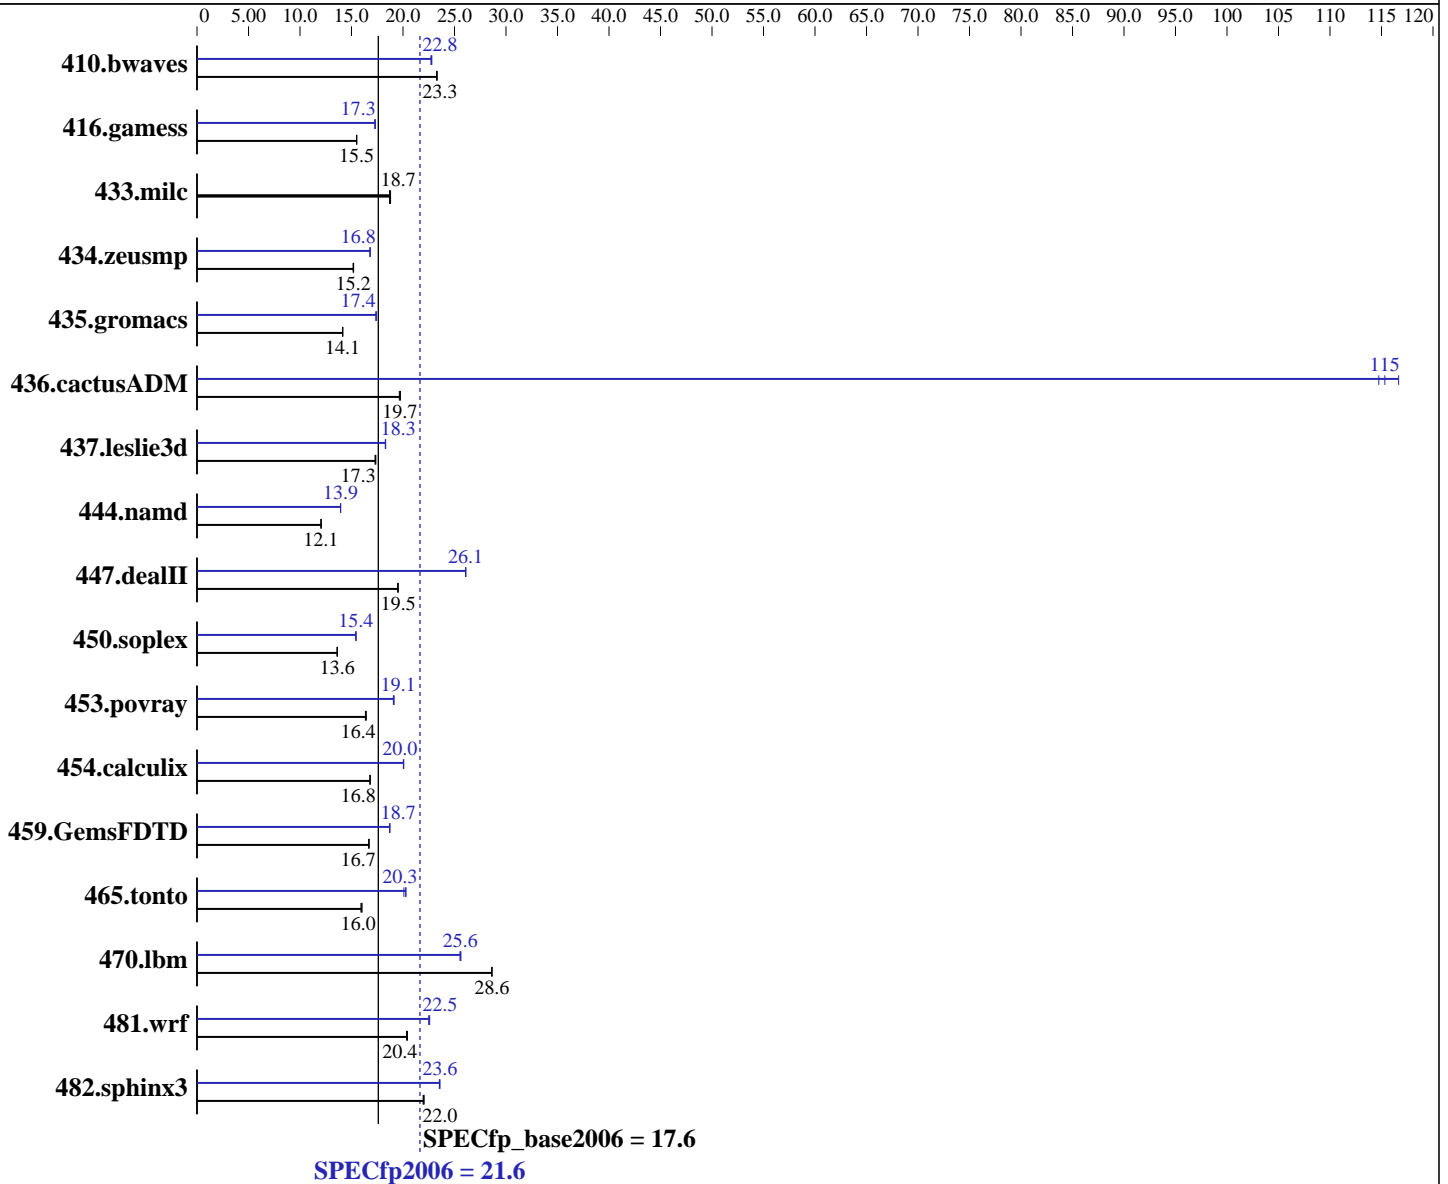

Hardware

CPU Name: AMD Opteron 2380
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 80 GB 5400 RPM SATA
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	584	23.3	583	23.3	584	23.3	596	22.8	597	22.8	598	22.7
416.gamess	1263	15.5	1263	15.5	1263	15.5	1134	17.3	1132	17.3	1131	17.3
433.milc	490	18.7	491	18.7	488	18.8	490	18.7	491	18.7	488	18.8
434.zeusmp	598	15.2	599	15.2	601	15.2	541	16.8	541	16.8	542	16.8
435.gromacs	505	14.1	504	14.2	505	14.1	410	17.4	411	17.4	410	17.4
436.cactusADM	608	19.6	605	19.7	606	19.7	102	117	104	115	104	115
437.leslie3d	543	17.3	541	17.4	543	17.3	514	18.3	514	18.3	513	18.3
444.namd	665	12.1	665	12.1	666	12.0	575	14.0	575	13.9	576	13.9
447.dealII	587	19.5	585	19.5	587	19.5	439	26.1	439	26.1	438	26.1
450.soplex	613	13.6	612	13.6	613	13.6	540	15.4	541	15.4	541	15.4
453.povray	324	16.4	325	16.4	325	16.4	278	19.1	279	19.1	279	19.1
454.calculix	491	16.8	491	16.8	491	16.8	411	20.0	411	20.1	412	20.0
459.GemsFDTD	635	16.7	636	16.7	636	16.7	567	18.7	567	18.7	567	18.7
465.tonto	615	16.0	615	16.0	618	15.9	490	20.1	485	20.3	486	20.3
470.lbm	480	28.6	480	28.6	480	28.6	536	25.6	538	25.5	537	25.6
481.wrf	547	20.4	549	20.3	547	20.4	496	22.5	496	22.5	494	22.6
482.sphinx3	884	22.1	887	22.0	887	22.0	828	23.5	826	23.6	828	23.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7146 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

LD_LIBRARY_PATH = "/root/cpu2006_1.1/amd909gh-libs/64:/root/cpu2006_1.1/amd909gh-libs/32"

NCPUS = "8"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deall: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc
-Mprefetch=nta -Mfpelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfpelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfpelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 21.6

PowerEdge M605 (AMD Opteron 2380, 2.50 GHz)

SPECfp_base2006 = 17.6

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

The flags files that were used to format this result can be browsed at

- http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html
- http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html
- <http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

- http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml
- http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
- <http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:43:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 December 2008.