SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5504, 2.00 GHz)

SPECint®2006 = 21.3

SPECint_base2006 = 19.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

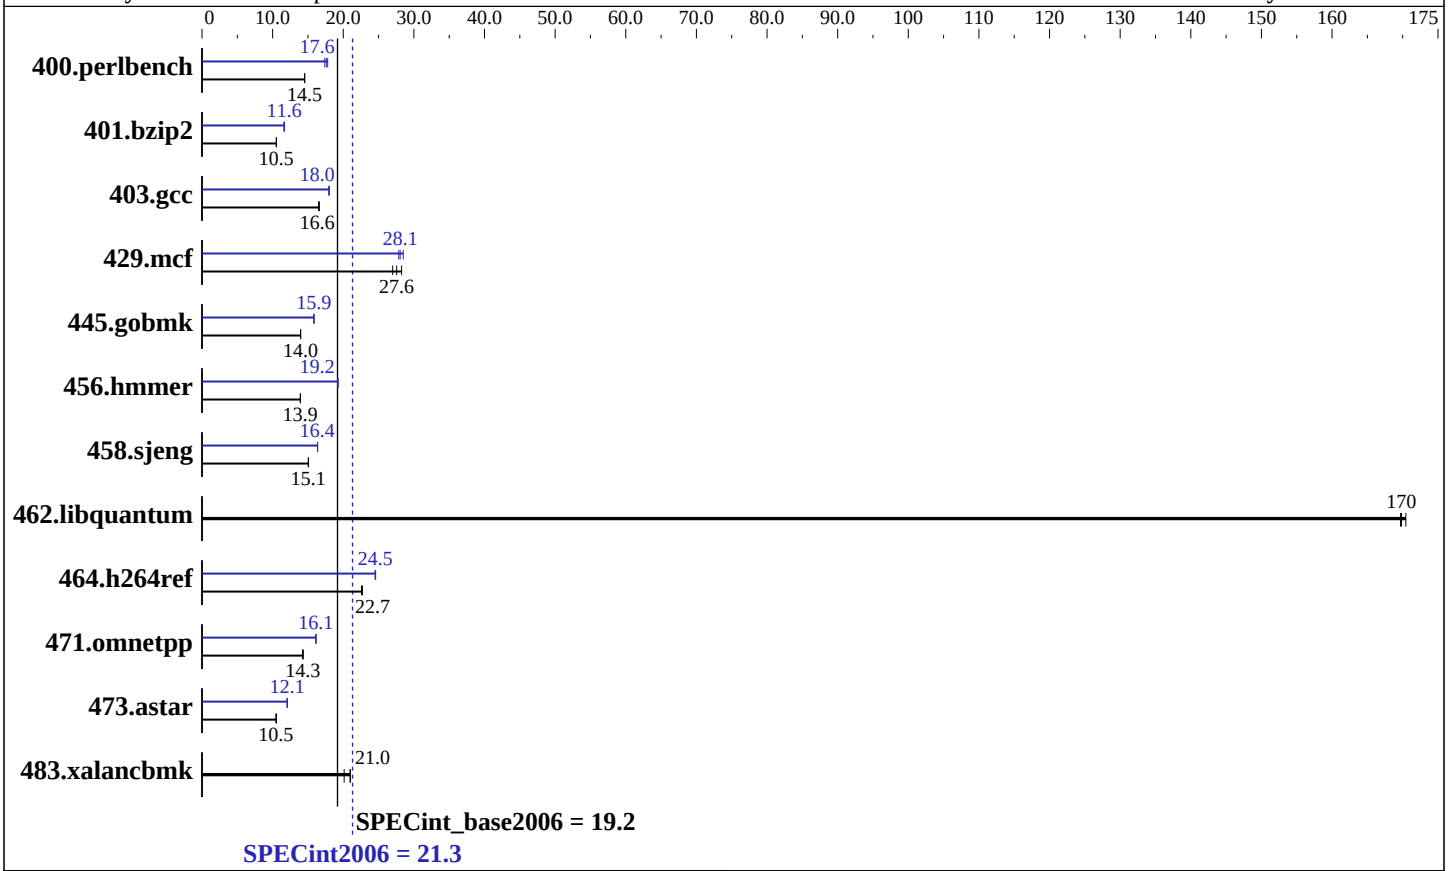

Hardware

CPU Name:	Intel Xeon E5504
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (12 x 2GB DDR3-1066, CL7)
Disk Subsystem:	1 x 150 GB SATA, 10000RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux SLES10 SP2, Kernel 2.6.16.60-0.34-smp for x86_64
Compiler:	Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro SuperServer 6026T-NTR+ (Intel Xeon E5504, 2.00 GHz)

SPECint2006 = 21.3

SPECint_base2006 = 19.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**673**	**14.5**	673	14.5	672	14.5	549	17.8	**555**	**17.6**	562	17.4
401.bzip2	917	10.5	**917**	**10.5**	915	10.5	**829**	**11.6**	831	11.6	827	11.7
403.gcc	487	16.5	485	16.6	**486**	**16.6**	447	18.0	**447**	**18.0**	448	18.0
429.mcf	338	27.0	**331**	**27.6**	323	28.3	320	28.5	**325**	**28.1**	327	27.9
445.gobmk	752	14.0	751	14.0	**751**	**14.0**	663	15.8	661	15.9	**662**	**15.9**
456.hmmer	**670**	**13.9**	670	13.9	670	13.9	485	19.2	485	19.2	**485**	**19.2**
458.sjeng	**803**	**15.1**	804	15.0	803	15.1	740	16.3	**739**	**16.4**	739	16.4
462.libquantum	122	170	**122**	**170**	122	170	122	170	**122**	**170**	122	170
464.h264ref	975	22.7	980	22.6	**975**	**22.7**	**901**	**24.5**	903	24.5	900	24.6
471.omnetpp	437	14.3	438	14.3	**437**	**14.3**	388	16.1	387	16.1	**387**	**16.1**
473.astar	666	10.5	669	10.5	**669**	**10.5**	582	12.1	**581**	**12.1**	581	12.1
483.xalancbmk	**329**	**21.0**	329	21.0	343	20.1	**329**	**21.0**	329	21.0	343	20.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -par-runtime-control -opt-prefetch`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/080/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:21:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.