



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 70.2**

PowerEdge R410 (Intel Xeon E5502, 1.86 GHz)

**SPECfp\_rate\_base2006 = 67.7**

CPU2006 license: 55


Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

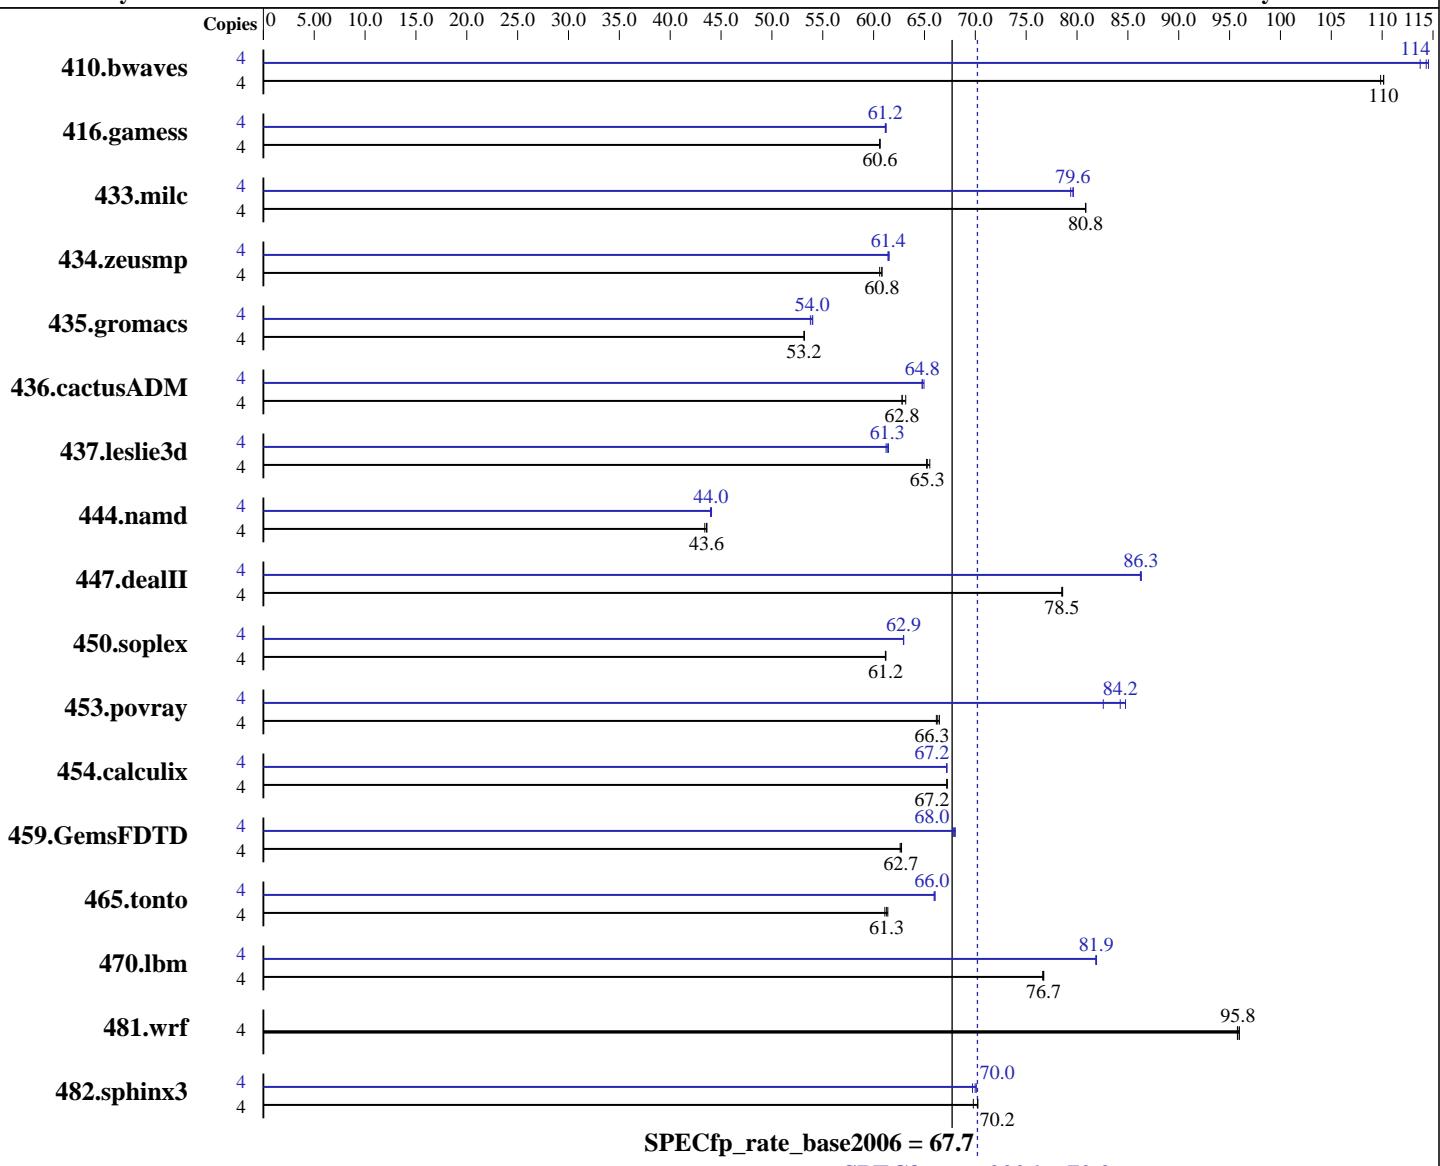

## Hardware

CPU Name: Intel Xeon E5502  
CPU Characteristics:  
CPU MHz:  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
Compiler: Intel C++ and Fortran Compiler Professional 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080, l\_cprof\_p\_11.0.080  
Auto Parallel: No  
File System: ReiserFS  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 70.2**

PowerEdge R410 (Intel Xeon E5502, 1.86 GHz)

**SPECfp\_rate\_base2006 = 67.7**

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1066 DR RDIMM downclocked to 800 MHz)  
 Disk Subsystem: 1 x 250 GB 7200 RPM SATA  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	495	110	493	110	<b>494</b>	<b>110</b>	4	478	114	475	115	<b>475</b>	<b>114</b>		
416.gamess	4	1292	60.6	1292	60.6	<b>1292</b>	<b>60.6</b>	4	1279	61.2	<b>1280</b>	<b>61.2</b>	1281	61.2		
433.milc	4	<b>454</b>	<b>80.8</b>	454	80.8	454	80.9	4	<b>461</b>	<b>79.6</b>	463	79.4	461	79.6		
434.zeusmp	4	601	60.6	<b>599</b>	<b>60.8</b>	599	60.8	4	593	61.4	<b>592</b>	<b>61.4</b>	592	61.5		
435.gromacs	4	537	53.2	<b>537</b>	<b>53.2</b>	537	53.2	4	<b>529</b>	<b>54.0</b>	531	53.8	529	54.0		
436.cactusADM	4	761	62.8	757	63.2	<b>761</b>	<b>62.8</b>	4	738	64.8	<b>738</b>	<b>64.8</b>	736	65.0		
437.leslie3d	4	574	65.5	577	65.2	<b>576</b>	<b>65.3</b>	4	612	61.5	<b>613</b>	<b>61.3</b>	614	61.2		
444.namd	4	736	43.6	<b>736</b>	<b>43.6</b>	739	43.4	4	<b>729</b>	<b>44.0</b>	728	44.1	730	44.0		
447.dealII	4	<b>583</b>	<b>78.5</b>	583	78.5	582	78.6	4	530	86.3	531	86.2	<b>530</b>	<b>86.3</b>		
450.soplex	4	<b>545</b>	<b>61.2</b>	545	61.2	545	61.2	4	530	63.0	<b>530</b>	<b>62.9</b>	530	62.9		
453.povray	4	<b>321</b>	<b>66.3</b>	322	66.2	320	66.5	4	251	84.8	<b>253</b>	<b>84.2</b>	258	82.6		
454.calculix	4	491	67.2	<b>491</b>	<b>67.2</b>	491	67.2	4	491	67.2	<b>491</b>	<b>67.2</b>	491	67.2		
459.GemsFDTD	4	<b>677</b>	<b>62.7</b>	676	62.7	678	62.6	4	<b>624</b>	<b>68.0</b>	626	67.8	624	68.0		
465.tonto	4	641	61.4	<b>642</b>	<b>61.3</b>	644	61.1	4	596	66.0	<b>596</b>	<b>66.0</b>	597	65.9		
470.lbm	4	<b>716</b>	<b>76.7</b>	716	76.7	717	76.6	4	672	81.8	<b>671</b>	<b>81.9</b>	671	81.9		
481.wrf	4	467	95.8	466	96.0	<b>466</b>	<b>95.8</b>	4	467	95.8	466	96.0	<b>466</b>	<b>95.8</b>		
482.sphinx3	4	1117	69.8	1110	70.2	<b>1110</b>	<b>70.2</b>	4	1118	69.7	<b>1114</b>	<b>70.0</b>	1112	70.1		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
 icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R410 (Intel Xeon E5502, 1.86 GHz)

**SPECfp\_rate2006 = 70.2**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R410 (Intel Xeon E5502, 1.86 GHz)

**SPECfp\_rate2006 = 70.2**

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R410 (Intel Xeon E5502, 1.86 GHz)

**SPECfp\_rate2006 = 70.2**

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R410 (Intel Xeon E5502, 1.86 GHz)

**SPECfp\_rate2006 = 70.2**

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -opt-prefetch -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:07:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 June 2009.