



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 27.6

IBM System x3650 M2 (Intel Xeon E5520)

SPECint_base2006 = 24.0

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Apr-2009

Software Availability: Feb-2009

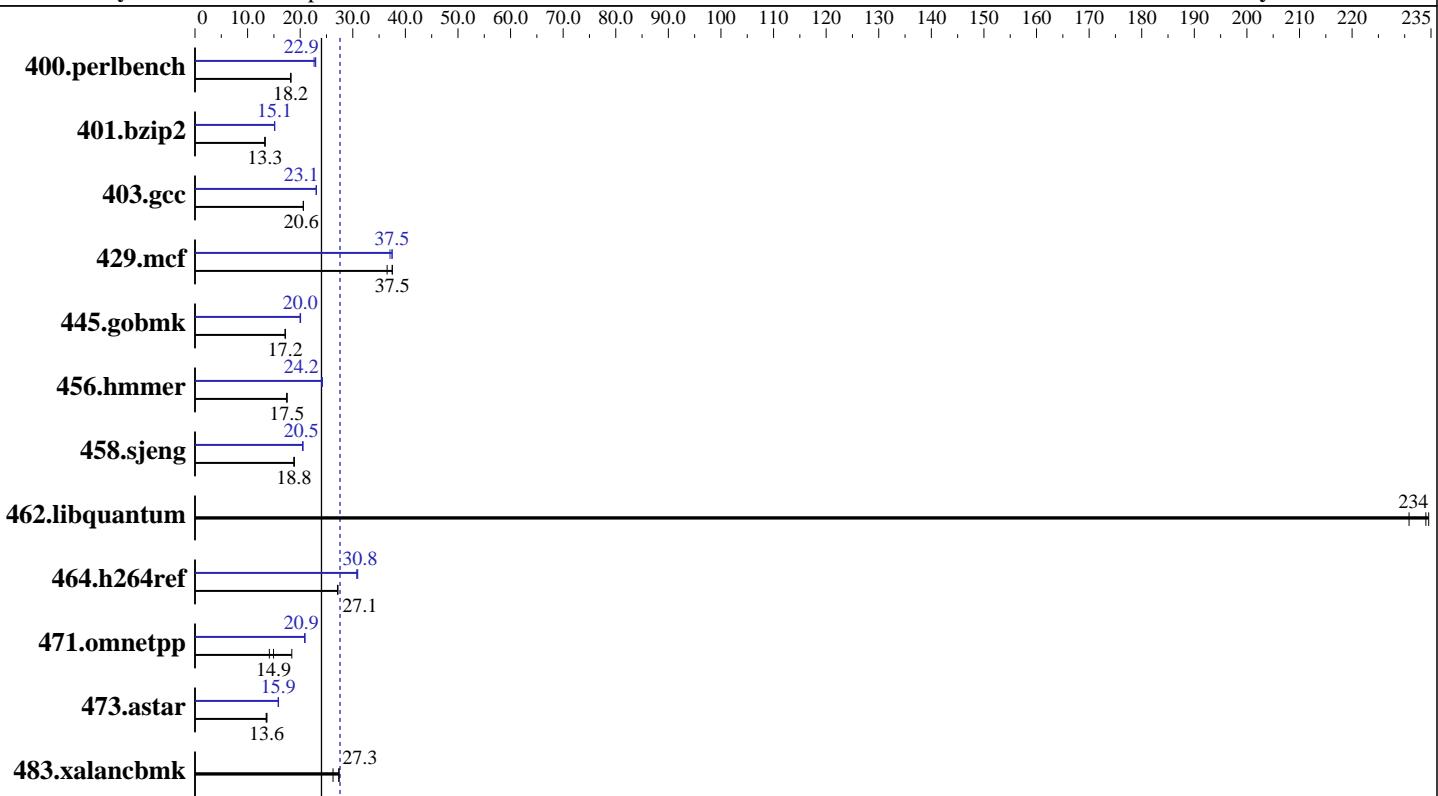

Hardware

CPU Name:	Intel Xeon E5520
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB PC3-10600R-ECC)
Disk Subsystem:	1 x 73 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
Compiler:	Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 27.6

IBM System x3650 M2 (Intel Xeon E5520)

SPECint_base2006 = 24.0

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	537	18.2	536	18.2	536	18.2	432	22.6	427	22.9	426	23.0
401.bzip2	725	13.3	725	13.3	725	13.3	637	15.1	637	15.2	638	15.1
403.gcc	391	20.6	391	20.6	391	20.6	349	23.1	349	23.1	349	23.1
429.mcf	250	36.5	243	37.5	243	37.5	243	37.5	246	37.1	243	37.5
445.gobmk	612	17.2	611	17.2	611	17.2	523	20.0	525	20.0	522	20.1
456.hmmer	534	17.5	534	17.5	534	17.5	387	24.1	385	24.2	386	24.2
458.sjeng	641	18.9	643	18.8	643	18.8	589	20.5	592	20.5	591	20.5
462.libquantum	89.8	231	88.5	234	88.3	235	89.8	231	88.5	234	88.3	235
464.h264ref	815	27.1	815	27.1	816	27.1	719	30.8	719	30.8	715	30.9
471.omnetpp	340	18.4	419	14.9	442	14.1	299	20.9	300	20.9	300	20.9
473.astar	514	13.7	515	13.6	519	13.5	443	15.9	444	15.8	442	15.9
483.xalancbmk	252	27.4	253	27.3	263	26.2	252	27.4	253	27.3	263	26.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 Turbo Mode Enable
 CPU C State Enable
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 27.6

IBM System x3650 M2 (Intel Xeon E5520)

SPECint_base2006 = 24.0

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmr: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 27.6

IBM System x3650 M2 (Intel Xeon E5520)

SPECint_base2006 = 24.0

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
            -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 27.6

IBM System x3650 M2 (Intel Xeon E5520)

SPECint_base2006 = 24.0

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 05:52:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 February 2010.