



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECint®\_rate2006 = 40.2

### PRIMERGY TX300 S6, Intel Xeon E5503, 2.00 GHz

### SPECint\_rate\_base2006 = 37.0

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

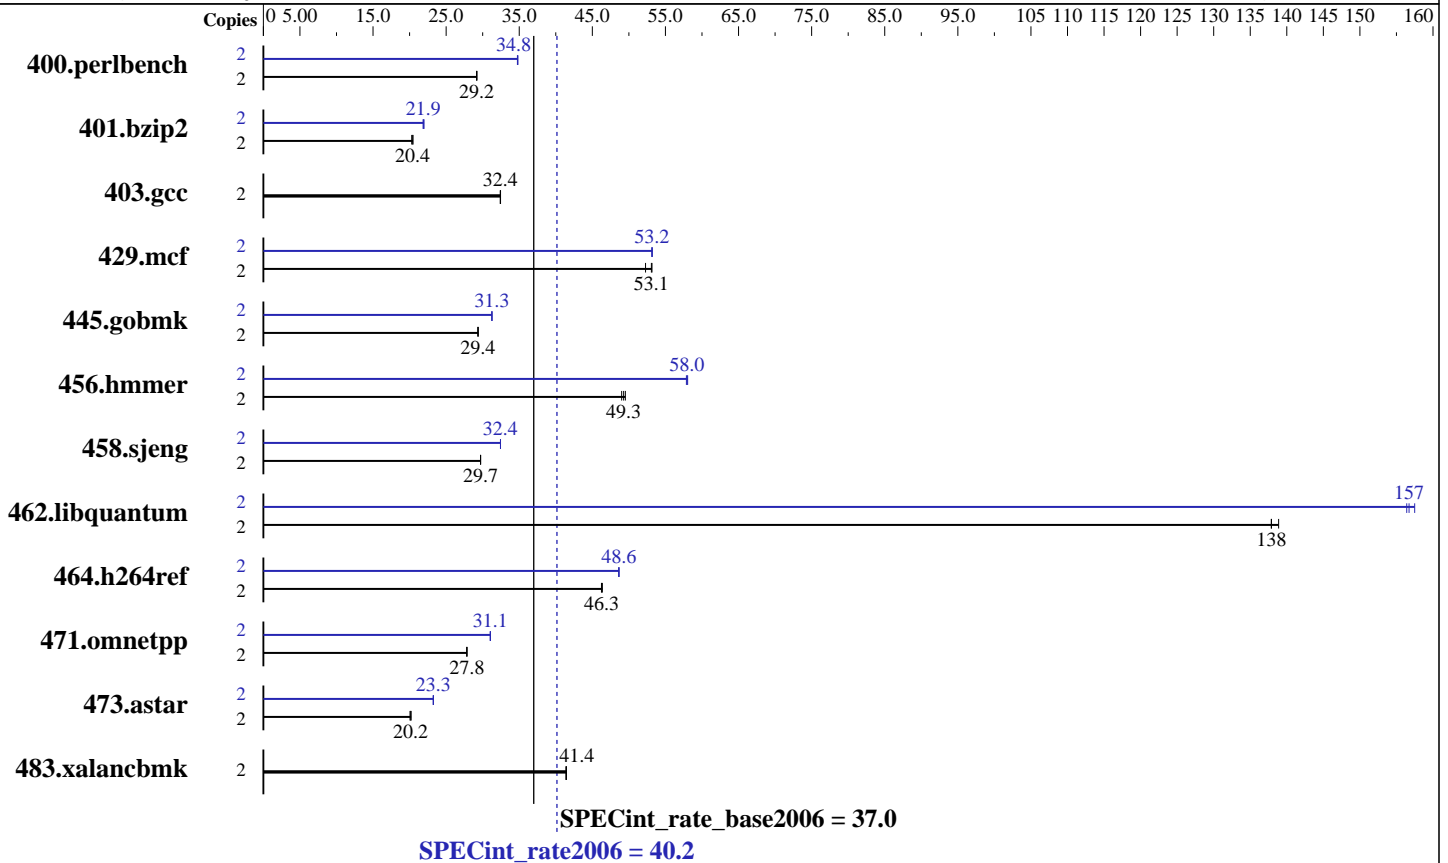

### Hardware

CPU Name: Intel Xeon E5503  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
 Disk Subsystem: 1 x SATA, 250 GB, 5.4 krpm  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 40.2

PRIMERGY TX300 S6, Intel Xeon E5503, 2.00 GHz

SPECint\_rate\_base2006 = 37.0

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Feb-2010  
Hardware Availability: Apr-2010  
Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	<b>670</b>	<b>29.2</b>	669	29.2	670	29.2	2	562	34.8	<b>562</b>	<b>34.8</b>	561	34.8
401.bzip2	2	<b>945</b>	<b>20.4</b>	951	20.3	943	20.5	2	882	21.9	<b>882</b>	<b>21.9</b>	878	22.0
403.gcc	2	496	32.4	<b>496</b>	<b>32.4</b>	497	32.4	2	496	32.4	<b>496</b>	<b>32.4</b>	497	32.4
429.mcf	2	349	52.3	343	53.2	<b>344</b>	<b>53.1</b>	2	343	53.2	343	53.1	<b>343</b>	<b>53.2</b>
445.gobmk	2	<b>714</b>	<b>29.4</b>	714	29.4	715	29.3	2	671	31.3	671	31.3	<b>671</b>	<b>31.3</b>
456.hammer	2	<b>379</b>	<b>49.3</b>	377	49.5	381	49.0	2	322	58.0	<b>322</b>	<b>58.0</b>	322	57.9
458.sjeng	2	815	29.7	<b>815</b>	<b>29.7</b>	814	29.7	2	746	32.4	746	32.4	<b>746</b>	<b>32.4</b>
462.libquantum	2	298	139	301	138	<b>300</b>	<b>138</b>	2	265	156	263	157	<b>264</b>	<b>157</b>
464.h264ref	2	954	46.4	<b>956</b>	<b>46.3</b>	957	46.2	2	910	48.7	910	48.6	<b>910</b>	<b>48.6</b>
471.omnetpp	2	449	27.8	<b>449</b>	<b>27.8</b>	449	27.9	2	402	31.1	403	31.0	<b>402</b>	<b>31.1</b>
473.astar	2	695	20.2	700	20.1	<b>697</b>	<b>20.2</b>	2	605	23.2	603	23.3	<b>604</b>	<b>23.3</b>
483.xalancbmk	2	<b>333</b>	<b>41.4</b>	333	41.5	333	41.4	2	<b>333</b>	<b>41.4</b>	333	41.5	333	41.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 800 MHz.  
BIOS configuration:  
Data Reuse Optimization = Disable

## General Notes

This result was measured on the PRIMERGY TX300 S6. The PRIMERGY TX300 S6 and the PRIMERGY RX300 S6 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 40.2

PRIMERGY TX300 S6, Intel Xeon E5503, 2.00 GHz

SPECint\_rate\_base2006 = 37.0

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Feb-2010  
Hardware Availability: Apr-2010  
Software Availability: Jan-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 40.2

PRIMERGY TX300 S6, Intel Xeon E5503, 2.00 GHz

SPECint\_rate\_base2006 = 37.0

CPU2006 license: 19

Test date: Feb-2010

Test sponsor: Fujitsu

Hardware Availability: Apr-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
                -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 40.2

PRIMERGY TX300 S6, Intel Xeon E5503, 2.00 GHz

SPECint\_rate\_base2006 = 37.0

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:16:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 March 2010.