



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®2006 = 28.1

PRIMERGY BX924 S2, Intel Xeon L5630, 2.13 GHz

SPECint_base2006 = 26.1

CPU2006 license: 19


Test date: Jul-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

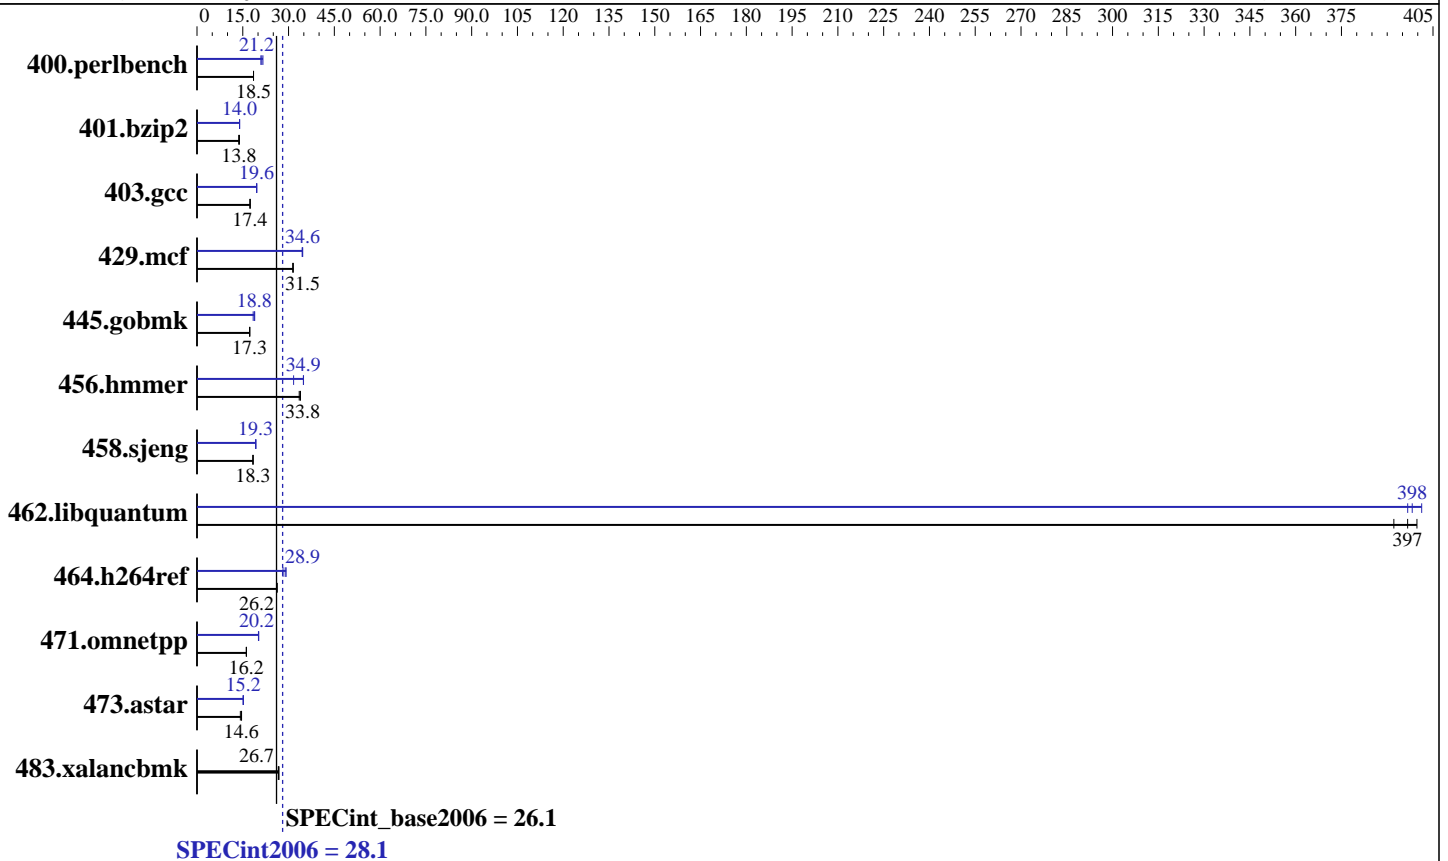

Hardware

CPU Name: Intel Xeon L5630
 CPU Characteristics: Intel Turbo Boost Technology up to 2.4 GHz
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
 Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = **28.1**

PRIMERGY BX924 S2, Intel Xeon L5630, 2.13 GHz

SPECint_base2006 = **26.1**

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jul-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	527	18.5	<u>528</u>	<u>18.5</u>	528	18.5	452	21.6	467	20.9	<u>460</u>	<u>21.2</u>
401.bzip2	694	13.9	704	13.7	<u>701</u>	<u>13.8</u>	<u>692</u>	<u>14.0</u>	692	13.9	692	14.0
403.gcc	<u>463</u>	<u>17.4</u>	462	17.4	463	17.4	412	19.6	411	19.6	<u>412</u>	<u>19.6</u>
429.mcf	<u>290</u>	<u>31.5</u>	289	31.5	290	31.4	265	34.5	<u>264</u>	<u>34.6</u>	263	34.6
445.gobmk	<u>608</u>	<u>17.3</u>	609	17.2	606	17.3	570	18.4	<u>558</u>	<u>18.8</u>	555	18.9
456.hammer	275	33.9	279	33.5	<u>276</u>	<u>33.8</u>	295	31.7	267	34.9	<u>268</u>	<u>34.9</u>
458.sjeng	<u>660</u>	<u>18.3</u>	660	18.3	658	18.4	<u>629</u>	<u>19.3</u>	627	19.3	630	19.2
462.libquantum	52.8	392	51.8	400	<u>52.2</u>	<u>397</u>	51.6	401	52.2	397	<u>52.0</u>	<u>398</u>
464.h264ref	846	26.2	<u>845</u>	<u>26.2</u>	844	26.2	<u>766</u>	<u>28.9</u>	785	28.2	758	29.2
471.omnetpp	386	16.2	<u>386</u>	<u>16.2</u>	386	16.2	<u>310</u>	<u>20.2</u>	309	20.2	310	20.1
473.astar	481	14.6	494	14.2	<u>482</u>	<u>14.6</u>	461	15.2	465	15.1	<u>462</u>	<u>15.2</u>
483.xalancbmk	<u>258</u>	<u>26.7</u>	259	26.6	257	26.9	<u>258</u>	<u>26.7</u>	259	26.6	257	26.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1067 MHz.
BIOS configuration:
Data Reuse Optimization = Disable
Intel HT Technology = Disable
Performance/Power Setting = Traditional

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 28.1

PRIMERGY BX924 S2, Intel Xeon L5630, 2.13 GHz

SPECint_base2006 = 26.1

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
429.mcf: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 28.1

PRIMERGY BX924 S2, Intel Xeon L5630, 2.13 GHz

SPECint_base2006 = 26.1

CPU2006 license: 19

Test date: Jul-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Peak Compiler Invocation (Continued)

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
 -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 28.1

PRIMERGY BX924 S2, Intel Xeon L5630, 2.13 GHz

SPECint_base2006 = 26.1

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:05:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 August 2010.