



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5620, 2.40 GHz)

SPECfp®2006 = 36.5

SPECfp_base2006 = 34.0

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

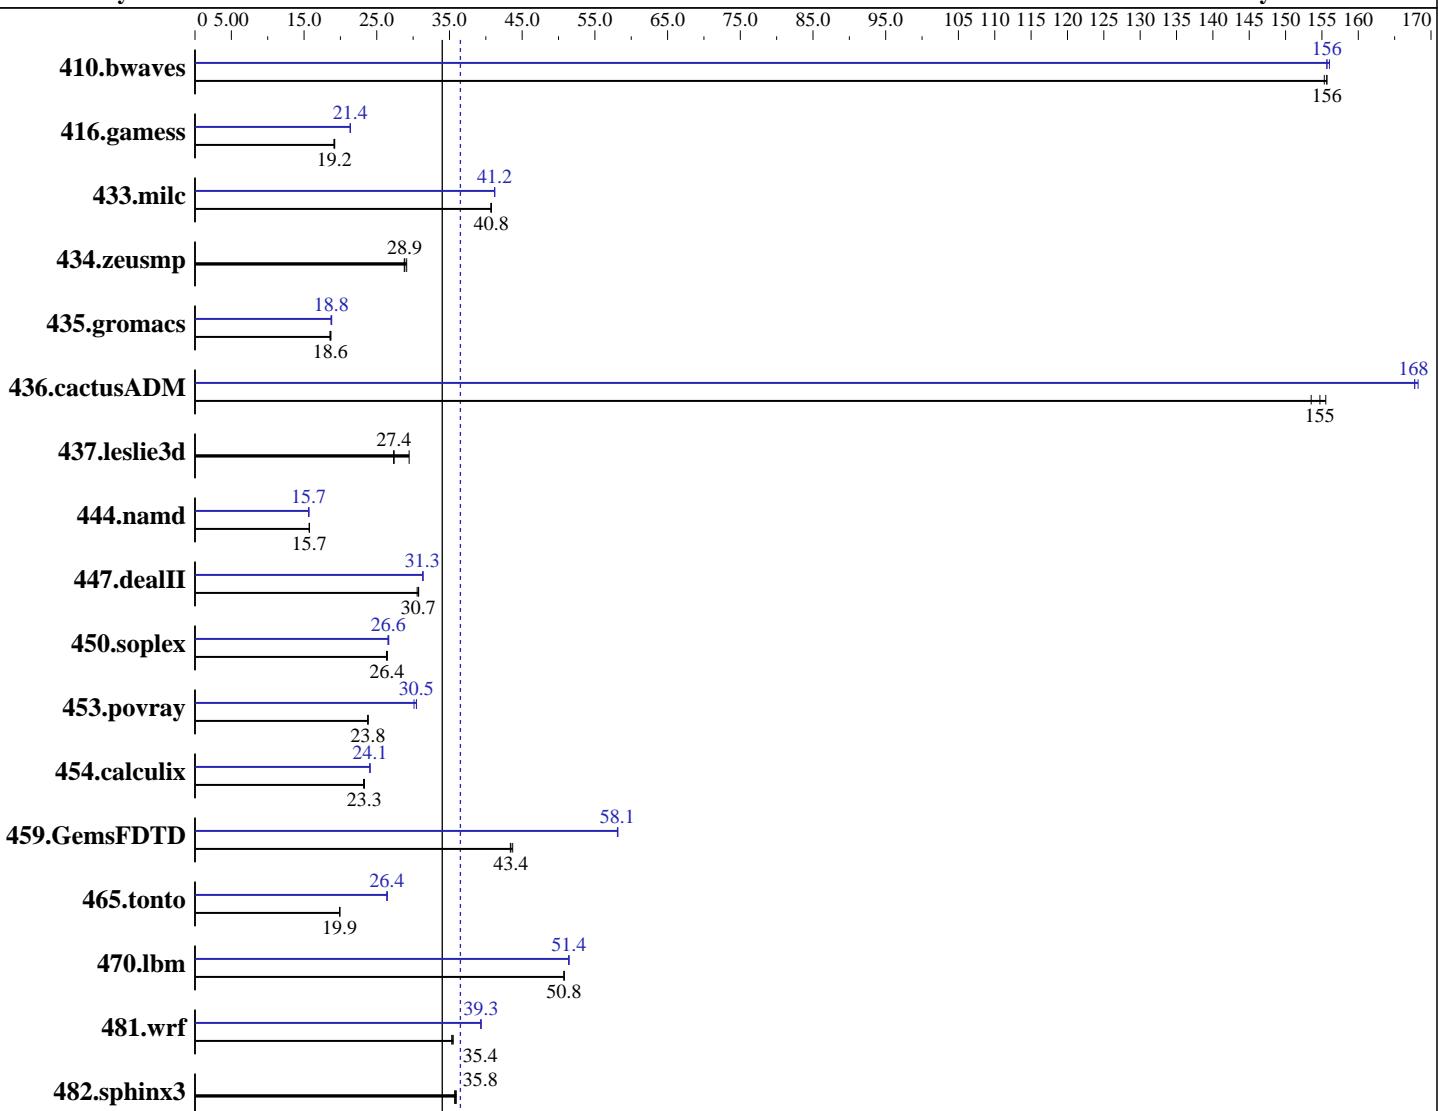

Hardware

CPU Name: Intel Xeon E5620
CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 36.5

PowerEdge T710 (Intel Xeon E5620, 2.40 GHz)

SPECfp_base2006 = 34.0

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
 Disk Subsystem: 2 x 300 GB 10000 RPM SAS
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	87.5	155	87.3	156	<u>87.3</u>	<u>156</u>	87.3	156	87.1	156	<u>87.3</u>	<u>156</u>
416.gamess	1019	19.2	1024	19.1	<u>1021</u>	<u>19.2</u>	917	21.3	<u>917</u>	<u>21.4</u>	916	21.4
433.milc	<u>225</u>	<u>40.8</u>	225	40.8	226	40.7	<u>223</u>	<u>41.2</u>	223	41.2	223	41.2
434.zeusmp	313	29.1	<u>315</u>	<u>28.9</u>	316	28.8	<u>313</u>	29.1	<u>315</u>	<u>28.9</u>	316	28.8
435.gromacs	382	18.7	384	18.6	<u>383</u>	<u>18.6</u>	<u>381</u>	<u>18.8</u>	382	18.7	380	18.8
436.cactusADM	<u>77.2</u>	<u>155</u>	76.8	156	77.8	154	<u>71.2</u>	168	<u>71.2</u>	<u>168</u>	71.0	168
437.leslie3d	344	27.3	<u>343</u>	<u>27.4</u>	319	29.5	344	27.3	<u>343</u>	<u>27.4</u>	319	29.5
444.namd	510	15.7	510	15.7	<u>510</u>	<u>15.7</u>	<u>512</u>	15.7	<u>512</u>	<u>15.7</u>	513	15.6
447.dealII	372	30.8	374	30.6	<u>372</u>	<u>30.7</u>	365	31.3	<u>365</u>	<u>31.3</u>	365	31.4
450.soplex	317	26.3	315	26.5	<u>316</u>	<u>26.4</u>	<u>314</u>	<u>26.6</u>	314	26.5	313	26.7
453.povray	224	23.8	<u>224</u>	<u>23.8</u>	223	23.8	177	30.1	<u>175</u>	<u>30.5</u>	175	30.5
454.calculix	354	23.3	356	23.2	<u>354</u>	<u>23.3</u>	343	24.1	343	24.1	<u>343</u>	<u>24.1</u>
459.GemsFDTD	245	43.4	243	43.7	<u>244</u>	<u>43.4</u>	182	58.2	<u>183</u>	<u>58.1</u>	183	58.1
465.tonto	495	19.9	494	19.9	<u>494</u>	<u>19.9</u>	372	26.4	<u>373</u>	<u>26.4</u>	373	26.4
470.lbm	271	50.8	271	50.8	<u>271</u>	<u>50.8</u>	<u>267</u>	<u>51.4</u>	267	51.4	267	51.5
481.wrf	316	35.3	<u>316</u>	<u>35.4</u>	314	35.5	284	39.3	<u>284</u>	<u>39.3</u>	284	39.4
482.sphinx3	542	35.9	<u>544</u>	<u>35.8</u>	546	35.7	<u>542</u>	<u>35.9</u>	<u>544</u>	<u>35.8</u>	546	35.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)
 Data Reuse = Disabled (Default = Enabled)

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5620, 2.40 GHz)

SPECfp2006 = 36.5

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

General Notes (Continued)

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Dell PowerEdge T710 and

the Bull NovaScale T860 F2 models are electronically equivalent.

The results have been measured on a Dell PowerEdge T610 model.

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5620, 2.40 GHz)

SPECfp2006 = 36.5

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -ansi-alias
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -parallel -ansi-alias -auto-ilp32
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 36.5

PowerEdge T710 (Intel Xeon E5620, 2.40 GHz)

SPECfp_base2006 = 34.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

447.dealII: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias -scalar-rep -auto-ilp32

450.soplex: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -auto-ilp32

453.povray: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
 -parallel

416.gamess: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32

436.cactusADM: -xsse4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsse4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T710 (Intel Xeon E5620, 2.40 GHz)

SPECfp2006 = 36.5

SPECfp_base2006 = 34.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:15:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 October 2010.