



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint®_rate2006 = 352

ACTINA SOLAR 220 S4 (Intel Xeon X5650)

SPECint_rate_base2006 = 331

CPU2006 license: 9008


Test date: Apr-2011

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2010

Tested by: ACTION S.A.

Software Availability: Jan-2011

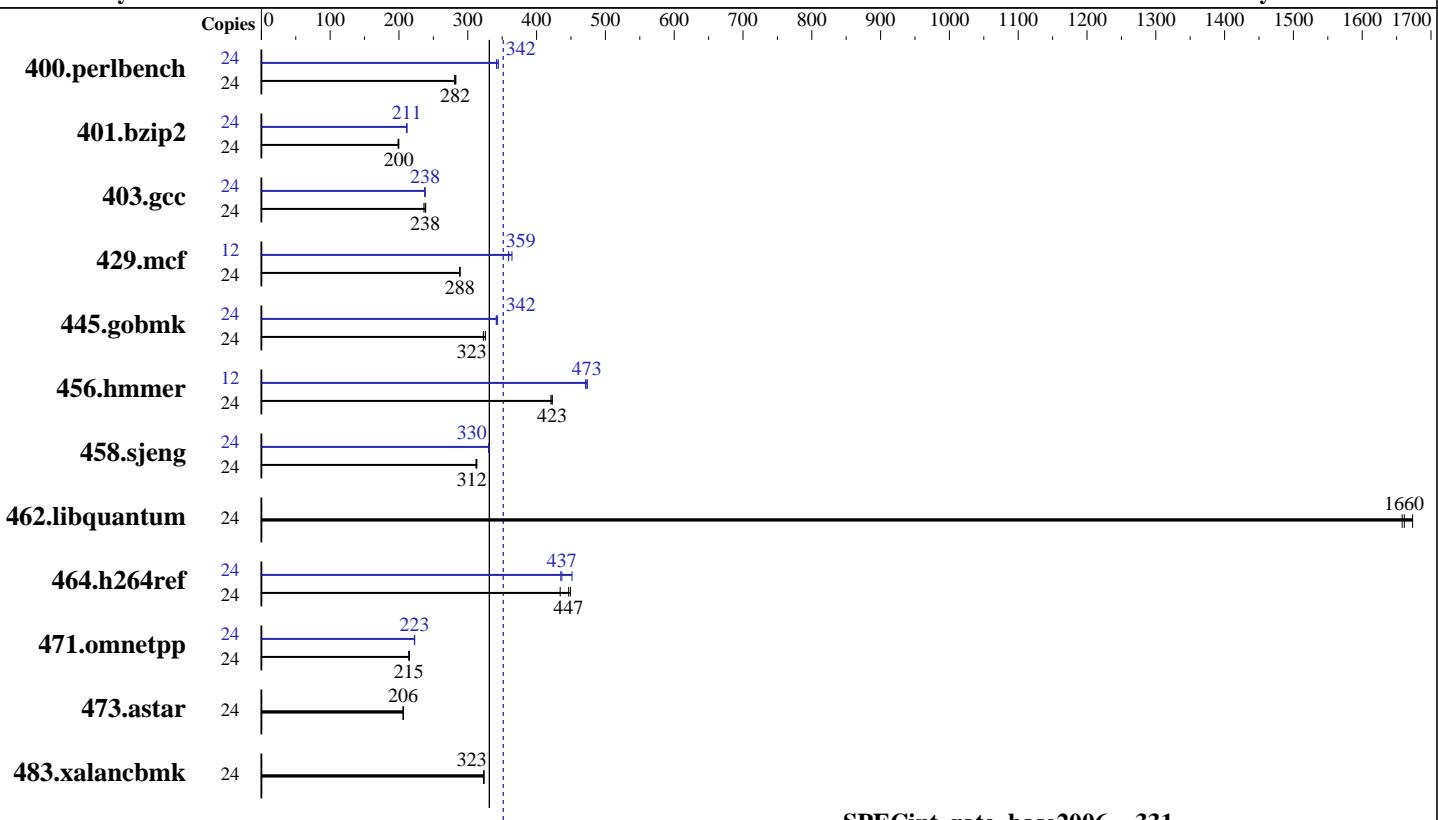

SPECint_rate_base2006 = 331

SPECint_rate2006 = 352

Hardware

CPU Name: Intel Xeon X5650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	352
ACTINA SOLAR 220 S4 (Intel Xeon X5650)	SPECint_rate_base2006 =	331

CPU2006 license: 9008

Test date: Apr-2011

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2010

Tested by: ACTION S.A.

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	835	281	832	282	829	283	24	681	344	685	342	686	342
401.bzip2	24	1166	199	1160	200	1161	200	24	1098	211	1095	211	1095	212
403.gcc	24	809	239	812	238	818	236	24	814	237	812	238	812	238
429.mcf	24	759	288	760	288	758	289	12	304	359	305	359	300	364
445.gobmk	24	780	323	779	323	773	326	24	736	342	733	343	738	341
456.hammer	24	532	421	530	423	530	423	12	238	471	237	473	236	474
458.sjeng	24	929	312	931	312	927	313	24	879	330	879	330	878	331
462.libquantum	24	297	1670	299	1660	300	1660	24	297	1670	299	1660	300	1660
464.h264ref	24	1182	449	1223	434	1189	447	24	1176	452	1221	435	1216	437
471.omnetpp	24	700	214	699	215	697	215	24	674	223	674	222	673	223
473.astar	24	818	206	816	206	817	206	24	818	206	816	206	817	206
483.xalancbmk	24	512	323	512	324	513	323	24	512	323	512	324	513	323

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'unlimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

General Notes

Binaries compiled on RHEL5.5 with
binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	352
ACTINA SOLAR 220 S4 (Intel Xeon X5650)	SPECint_rate_base2006 =	331
CPU2006 license: 9008	Test date:	Apr-2011
Test sponsor: ACTION S.A.	Hardware Availability:	Apr-2010
Tested by: ACTION S.A.	Software Availability:	Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	352
ACTINA SOLAR 220 S4 (Intel Xeon X5650)	SPECint_rate_base2006 =	331
CPU2006 license: 9008	Test date:	Apr-2011
Test sponsor: ACTION S.A.	Hardware Availability:	Apr-2010
Tested by: ACTION S.A.	Software Availability:	Jan-2011

Peak Portability Flags (Continued)

```
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -opt-prefetch -auto-ilp32 -ansi-alias
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
          -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4 -auto-ilp32
            -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/smartheap -lsmartheap
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 =	352
ACTINA SOLAR 220 S4 (Intel Xeon X5650)	SPECint_rate_base2006 =	331
CPU2006 license: 9008	Test date:	Apr-2011
Test sponsor: ACTION S.A.	Hardware Availability:	Apr-2010
Tested by: ACTION S.A.	Software Availability:	Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/ACTION-platform-linux64.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/ACTION-platform-linux64.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:15:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2011.