



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = 74.5

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp\_rate\_base2006 = 73.1

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

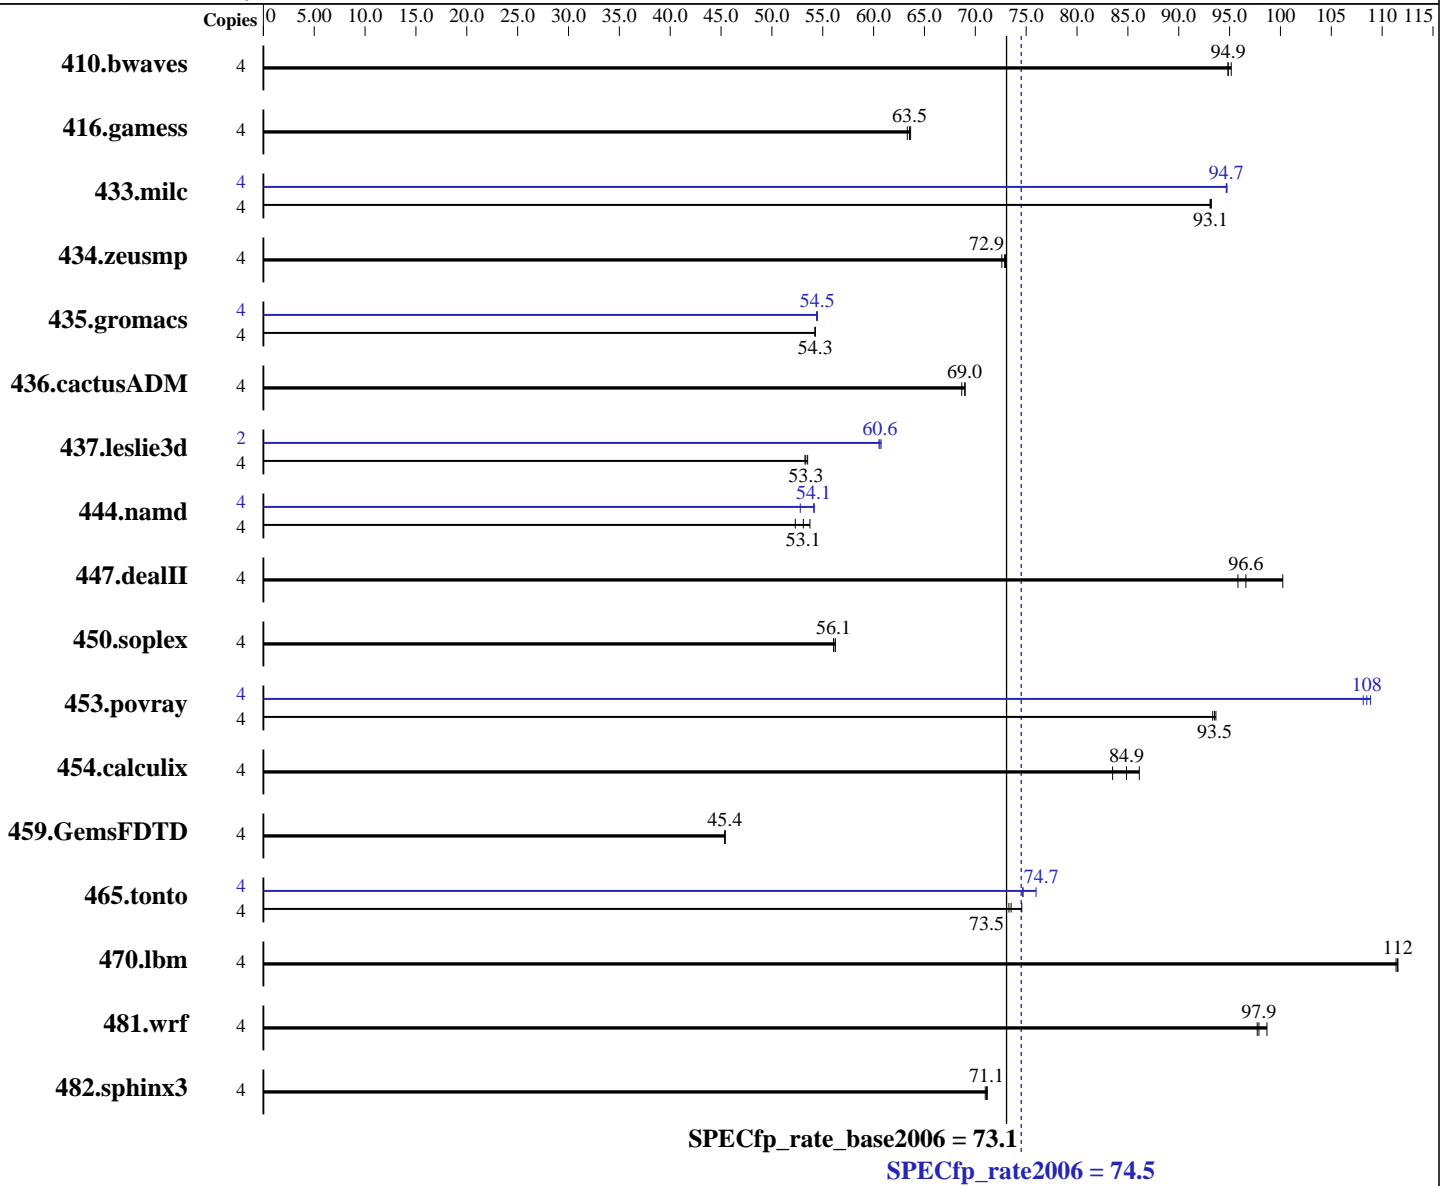

### Hardware

CPU Name: Intel Core i3-2100  
 CPU Characteristics:  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 74.5

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp\_rate\_base2006 = 73.1

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)  
Disk Subsystem: 1 x SATA, 300 GB, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	571	95.2	<b>573</b>	<b>94.9</b>	573	94.8	4	571	95.2	<b>573</b>	<b>94.9</b>	573	94.8
416.gamess	4	<b>1233</b>	<b>63.5</b>	1231	63.6	1237	63.3	4	<b>1233</b>	<b>63.5</b>	1231	63.6	1237	63.3
433.milc	4	<b>394</b>	<b>93.1</b>	394	93.2	395	93.1	4	388	94.7	388	94.7	<b>388</b>	<b>94.7</b>
434.zeusmp	4	501	72.6	499	73.0	<b>499</b>	<b>72.9</b>	4	501	72.6	499	73.0	<b>499</b>	<b>72.9</b>
435.gromacs	4	527	54.2	<b>526</b>	<b>54.3</b>	526	54.3	4	<b>524</b>	<b>54.5</b>	524	54.5	525	54.4
436.cactusADM	4	<b>693</b>	<b>69.0</b>	693	69.0	696	68.7	4	<b>693</b>	<b>69.0</b>	693	69.0	696	68.7
437.leslie3d	4	703	53.5	<b>705</b>	<b>53.3</b>	706	53.3	2	310	60.7	311	60.5	<b>310</b>	<b>60.6</b>
444.namd	4	<b>604</b>	<b>53.1</b>	597	53.7	613	52.3	4	592	54.2	608	52.8	<b>593</b>	<b>54.1</b>
447.dealII	4	<b>474</b>	<b>96.6</b>	457	100	478	95.8	4	<b>474</b>	<b>96.6</b>	457	100	478	95.8
450.soplex	4	593	56.2	<b>595</b>	<b>56.1</b>	595	56.1	4	593	56.2	<b>595</b>	<b>56.1</b>	595	56.1
453.povray	4	<b>228</b>	<b>93.5</b>	228	93.3	227	93.7	4	197	108	195	109	<b>196</b>	<b>108</b>
454.calculix	4	383	86.1	395	83.5	<b>389</b>	<b>84.9</b>	4	383	86.1	395	83.5	<b>389</b>	<b>84.9</b>
459.GemsFDTD	4	935	45.4	936	45.4	<b>935</b>	<b>45.4</b>	4	935	45.4	936	45.4	<b>935</b>	<b>45.4</b>
465.tonto	4	528	74.6	537	73.3	<b>535</b>	<b>73.5</b>	4	<b>527</b>	<b>74.7</b>	527	74.7	518	76.0
470.lbm	4	493	111	493	112	<b>493</b>	<b>112</b>	4	493	111	493	112	<b>493</b>	<b>112</b>
481.wrf	4	457	97.7	453	98.7	<b>456</b>	<b>97.9</b>	4	457	97.7	453	98.7	<b>456</b>	<b>97.9</b>
482.sphinx3	4	1098	71.0	<b>1096</b>	<b>71.1</b>	1095	71.2	4	1098	71.0	<b>1096</b>	<b>71.1</b>	1095	71.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
Large pages were not enabled for this run

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on RHEL5.5  
This result was measured on the PRIMERGY TX140 S1. The PRIMERGY TX120 S3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 74.5**

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

**SPECfp\_rate\_base2006 = 73.1**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2011  
**Hardware Availability:** Jun-2011  
**Software Availability:** Jan-2011

## General Notes (Continued)

and the PRIMERGY TX140 S1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 74.5**

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

**SPECfp\_rate\_base2006 = 73.1**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** May-2011

**Hardware Availability:** Jun-2011

**Software Availability:** Jan-2011

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

447.dealII: `basepeak = yes`

450.soplex: `basepeak = yes`

453.povray: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 74.5

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp\_rate\_base2006 = 73.1

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2011  
Hardware Availability: Jun-2011  
Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 74.5

PRIMERGY TX140 S1, Intel Core i3-2100, 3.10 GHz

SPECfp\_rate\_base2006 = 73.1

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2011

Hardware Availability: Jun-2011

Software Availability: Jan-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 18:32:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 June 2011.