



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 244

ProLiant BL465c G7
(2.6 GHz AMD Opteron 6212)

SPECfp_rate_base2006 = 229

CPU2006 license: 3


Test date: Nov-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

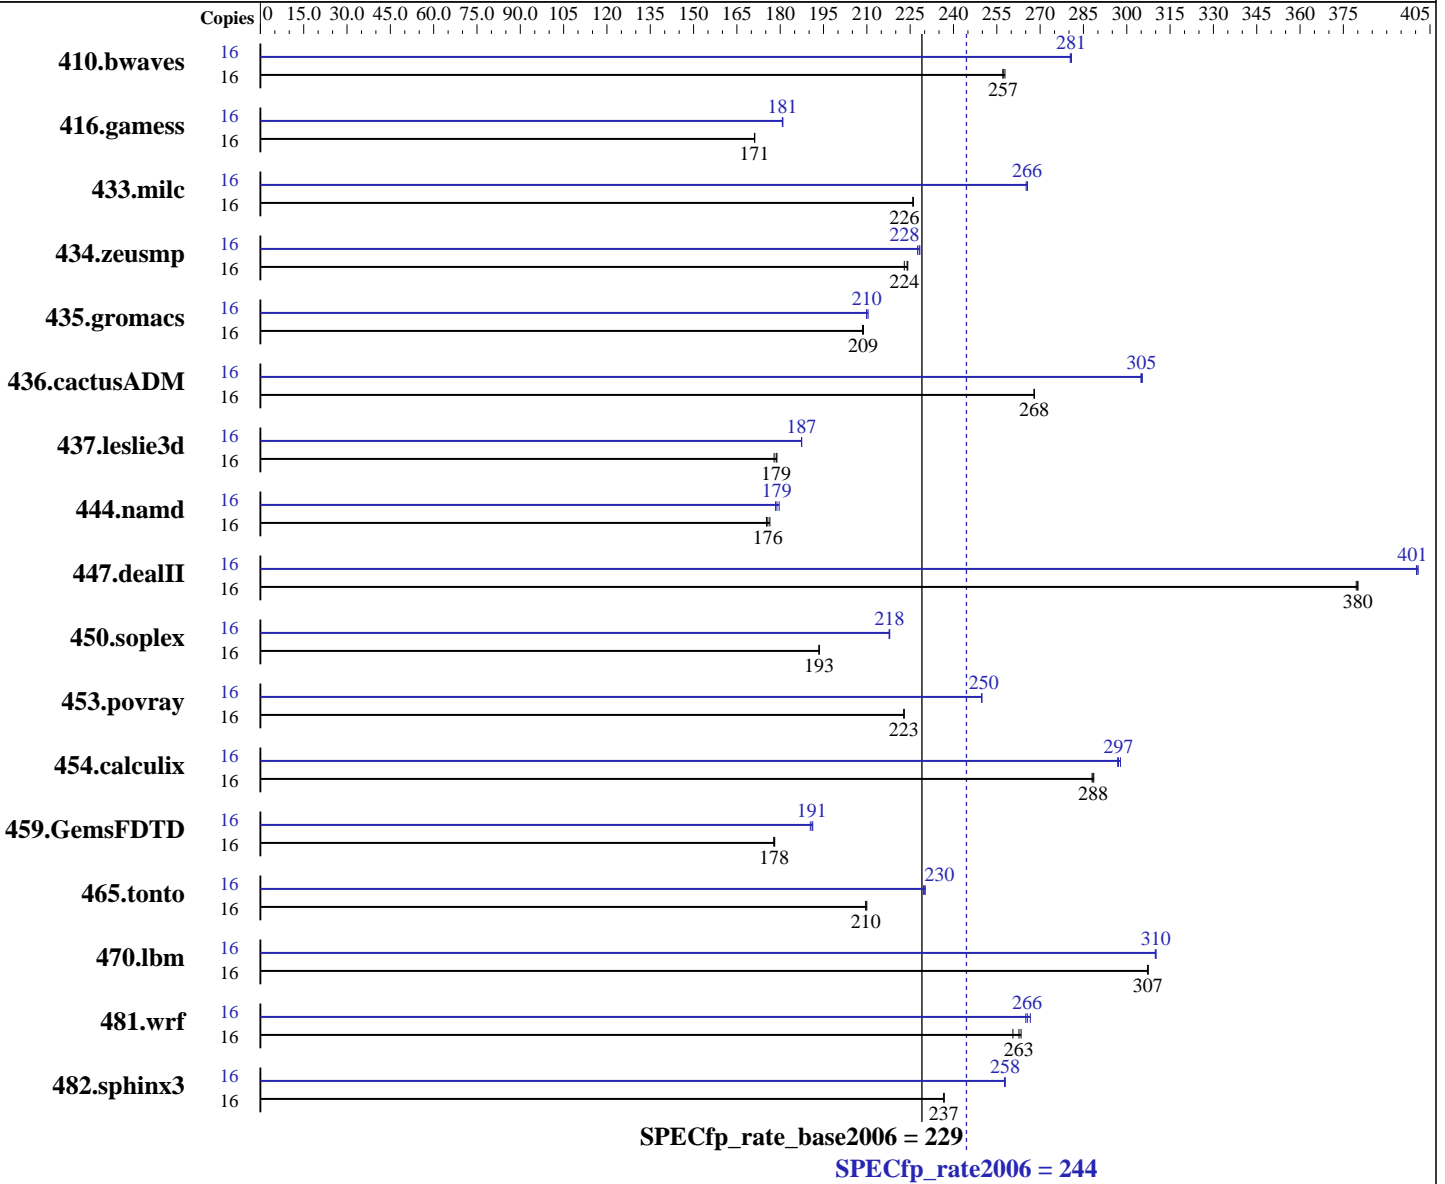

Hardware

CPU Name: AMD Opteron 6212
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 244

ProLiant BL465c G7
(2.6 GHz AMD Opteron 6212)

SPECfp_rate_base2006 = 229

CPU2006 license: 3

Test date: Nov-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 4 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-9, ECC)

Disk Subsystem: 1 x 300 GB 10 K SAS

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	845	257	846	257	843	258	16	775	281	775	280	774	281
416.gamess	16	1831	171	1830	171	1831	171	16	1732	181	1733	181	1733	181
433.milc	16	650	226	650	226	650	226	16	553	266	553	266	554	265
434.zeusmp	16	650	224	653	223	649	224	16	638	228	640	228	638	228
435.gromacs	16	548	209	547	209	547	209	16	544	210	543	210	544	210
436.cactusADM	16	714	268	713	268	714	268	16	627	305	627	305	626	305
437.leslie3d	16	842	179	841	179	845	178	16	802	187	803	187	803	187
444.namd	16	727	176	730	176	732	175	16	719	178	717	179	714	180
447.dealII	16	482	380	482	379	482	380	16	457	401	457	400	457	401
450.soplex	16	690	193	690	194	690	193	16	613	218	612	218	612	218
453.povray	16	382	223	382	223	382	223	16	341	250	341	250	341	250
454.calculix	16	458	288	457	289	458	288	16	445	297	444	297	443	298
459.GemsFDTD	16	953	178	954	178	955	178	16	892	190	889	191	888	191
465.tonto	16	751	210	750	210	751	210	16	686	230	685	230	684	230
470.lbm	16	715	307	715	307	716	307	16	709	310	709	310	709	310
481.wrf	16	678	263	686	261	680	263	16	674	265	670	267	673	266
482.sphinx3	16	1318	237	1317	237	1317	237	16	1209	258	1210	258	1209	258

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set "echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 244

ProLiant BL465c G7
(2.6 GHz AMD Opteron 6212)

SPECfp_rate_base2006 = 229

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Operating System Notes (Continued)

```
Set kernel/randomize_va_space=0 in /etc/sysctl.conf
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
Set "nodev /mnt/hugepages hugetlbfs defaults 0 0" in /etc/fstab
```

Platform Notes

BIOS settings:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006-1.1/amd1104-rate-libs-revA/32:/cpu2006-1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencC

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencC openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 244

ProLiant BL465c G7
(2.6 GHz AMD Opteron 6212)

SPECfp_rate_base2006 = 229

CPU2006 license: 3

Test date: Nov-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Base Portability Flags (Continued)

```

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

```

C++ benchmarks:

```

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

```

Fortran benchmarks:

```

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

```

Benchmarks using both Fortran and C:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

```

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 244

ProLiant BL465c G7
(2.6 GHz AMD Opteron 6212)

SPECfp_rate_base2006 = 229

CPU2006 license: 3

Test date: Nov-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 244

ProLiant BL465c G7
(2.6 GHz AMD Opteron 6212)

SPECfp_rate_base2006 = 229

CPU2006 license: 3

Test date: Nov-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bd=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bd=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bd=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 244

ProLiant BL465c G7
(2.6 GHz AMD Opteron 6212)

SPECfp_rate_base2006 = 229

CPU2006 license: 3

Test date: Nov-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2011

Tested by: Hewlett-Packard Company

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-CG:load_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:34:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 November 2011.