



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 75.1

IBM System x3650 M4 (Intel Xeon E5-2650)

SPECfp_base2006 = 70.9

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

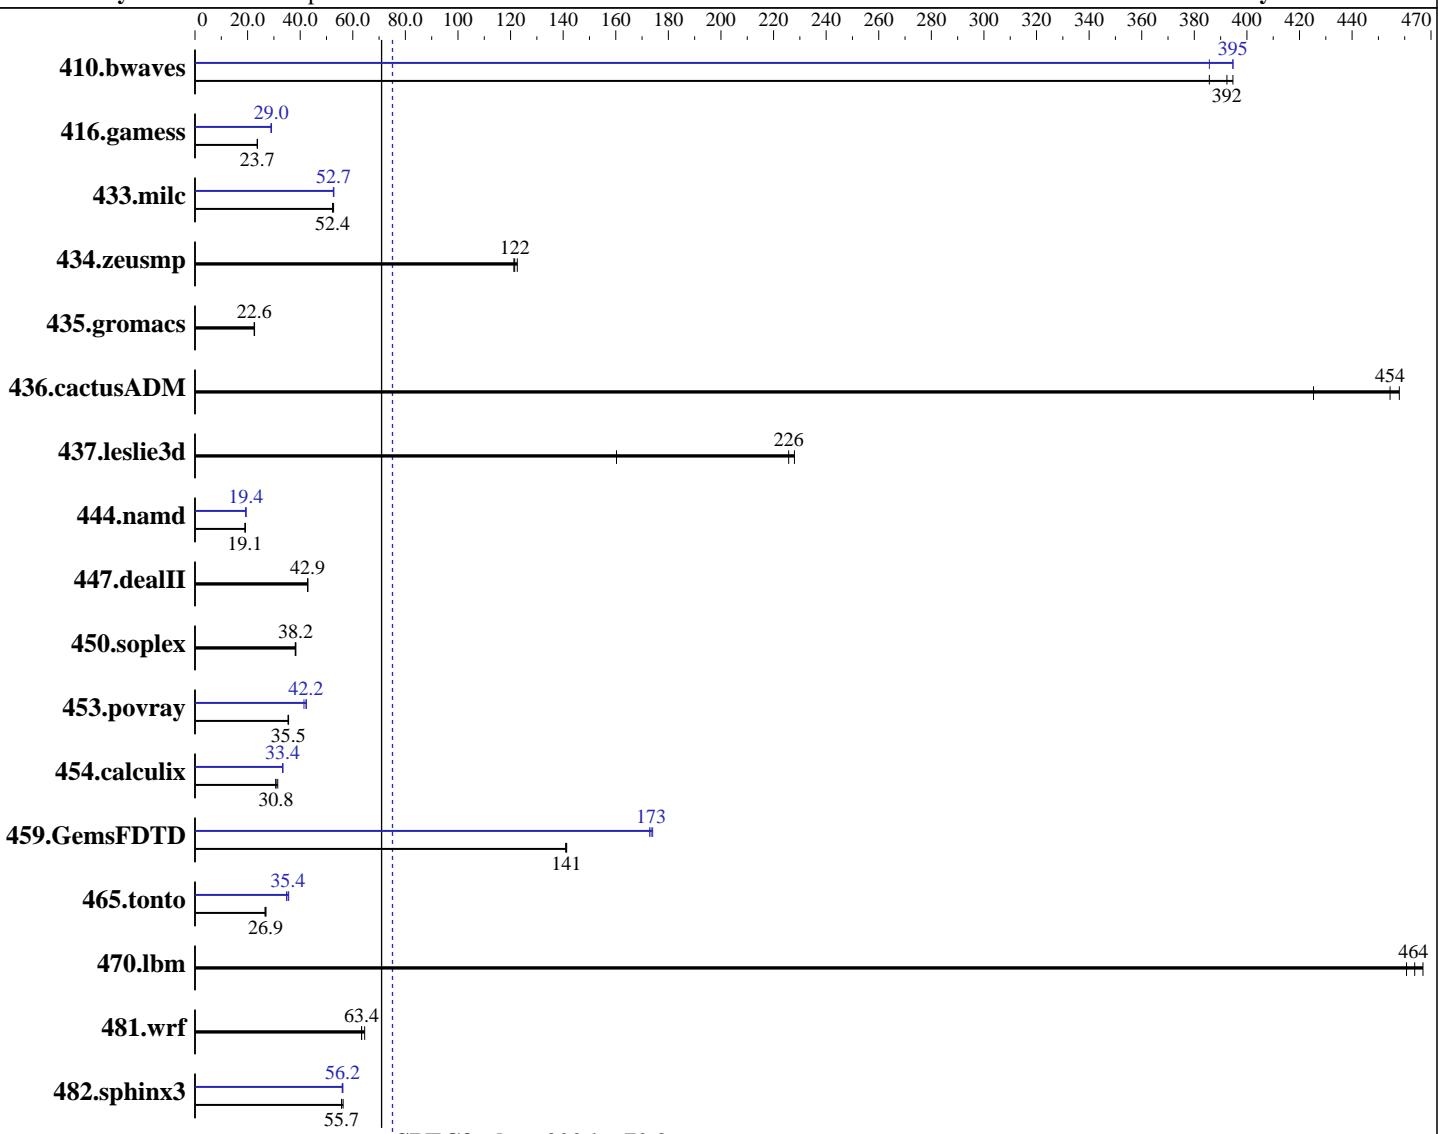

Hardware

CPU Name: Intel Xeon E5-2650
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)
Compiler: 2.6.32-131.0.15.el6.x86_64
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 (Intel Xeon E5-2650)

SPECfp2006 = 75.1

SPECfp_base2006 = 70.9

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 1 TB SAS, 7200 RPM
 Other Hardware: None

System State: Run level 3 (add definition here)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	34.4	395	35.2	386	<u>34.6</u>	<u>392</u>	<u>34.4</u>	<u>395</u>	35.2	386	34.4	395
416.gamess	827	23.7	<u>825</u>	<u>23.7</u>	825	23.7	<u>673</u>	<u>29.1</u>	677	28.9	<u>676</u>	<u>29.0</u>
433.milc	<u>175</u>	<u>52.4</u>	174	52.7	175	52.3	<u>175</u>	<u>52.6</u>	<u>174</u>	<u>52.7</u>	174	52.8
434.zeusmp	75.1	121	74.3	123	<u>74.9</u>	<u>122</u>	<u>75.1</u>	121	74.3	123	<u>74.9</u>	<u>122</u>
435.gromacs	<u>316</u>	<u>22.6</u>	317	22.5	315	22.7	<u>316</u>	<u>22.6</u>	317	22.5	315	22.7
436.cactusADM	28.1	425	<u>26.3</u>	<u>454</u>	26.1	458	<u>28.1</u>	425	<u>26.3</u>	<u>454</u>	26.1	458
437.leslie3d	58.6	160	<u>41.6</u>	<u>226</u>	41.2	228	<u>58.6</u>	160	<u>41.6</u>	<u>226</u>	41.2	228
444.namd	420	19.1	421	19.1	<u>420</u>	<u>19.1</u>	<u>414</u>	<u>19.4</u>	415	19.3	414	19.4
447.dealII	267	42.9	267	42.9	<u>267</u>	<u>42.9</u>	267	42.9	267	42.9	<u>267</u>	<u>42.9</u>
450.soplex	<u>218</u>	<u>38.2</u>	219	38.1	217	38.3	<u>218</u>	<u>38.2</u>	219	38.1	217	38.3
453.povray	149	35.6	150	35.4	<u>150</u>	<u>35.5</u>	<u>126</u>	<u>42.2</u>	126	42.4	128	41.4
454.calculix	<u>268</u>	<u>30.8</u>	269	30.7	262	31.5	<u>247</u>	<u>33.4</u>	248	33.3	247	33.4
459.GemsFDTD	<u>75.1</u>	<u>141</u>	75.1	141	75.3	141	61.0	174	61.4	173	<u>61.2</u>	<u>173</u>
465.tonto	370	26.6	365	26.9	<u>365</u>	<u>26.9</u>	276	35.6	<u>278</u>	<u>35.4</u>	283	34.8
470.lbm	29.4	467	<u>29.6</u>	<u>464</u>	29.8	461	29.4	467	<u>29.6</u>	<u>464</u>	29.8	461
481.wrf	176	63.3	<u>176</u>	<u>63.4</u>	173	64.5	176	63.3	<u>176</u>	<u>63.4</u>	173	64.5
482.sphinx3	346	56.3	350	55.7	<u>350</u>	<u>55.7</u>	<u>347</u>	<u>56.2</u>	347	<u>56.2</u>	348	56.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

BIOS Settings:

Operating Mode set to Maximum Performance

Sysinfo program /root/SPECcpu-v1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on x3650M4 Sun Mar 25 00:52:33 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 75.1

IBM System x3650 M4 (Intel Xeon E5-2650)

SPECfp_base2006 = 70.9

CPU2006 license: 11

Test date: Mar-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132113224 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3650M4 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 23 11:26
```

```
SPEC is set to: /root/SPECcpu-v1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4-lv_root
                  ext4   790G   66G  685G   9%  /
```

```
Additional information from dmidecode:
```

```
Memory:
 16x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/SPECcpu-v1.2/libs/32:/root/SPECcpu-v1.2/libs/64"

OMP_NUM_THREADS = "16"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 75.1

IBM System x3650 M4 (Intel Xeon E5-2650)

SPECfp_base2006 = 70.9

CPU2006 license: 11

Test date: Mar-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 75.1

IBM System x3650 M4 (Intel Xeon E5-2650)

SPECfp_base2006 = 70.9

CPU2006 license: 11

Test date: Mar-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	75.1
IBM System x3650 M4 (Intel Xeon E5-2650)	SPECfp_base2006 =	70.9
CPU2006 license: 11	Test date:	Mar-2012
Test sponsor: IBM Corporation	Hardware Availability:	Mar-2012
Tested by: IBM Corporation	Software Availability:	Oct-2011

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
 -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
 -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 75.1

IBM System x3650 M4 (Intel Xeon E5-2650)

SPECfp_base2006 = 70.9

CPU2006 license: 11

Test date: Mar-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 07:38:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 April 2012.