




SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.0 GHz)

SPECint®2006 = 39.6

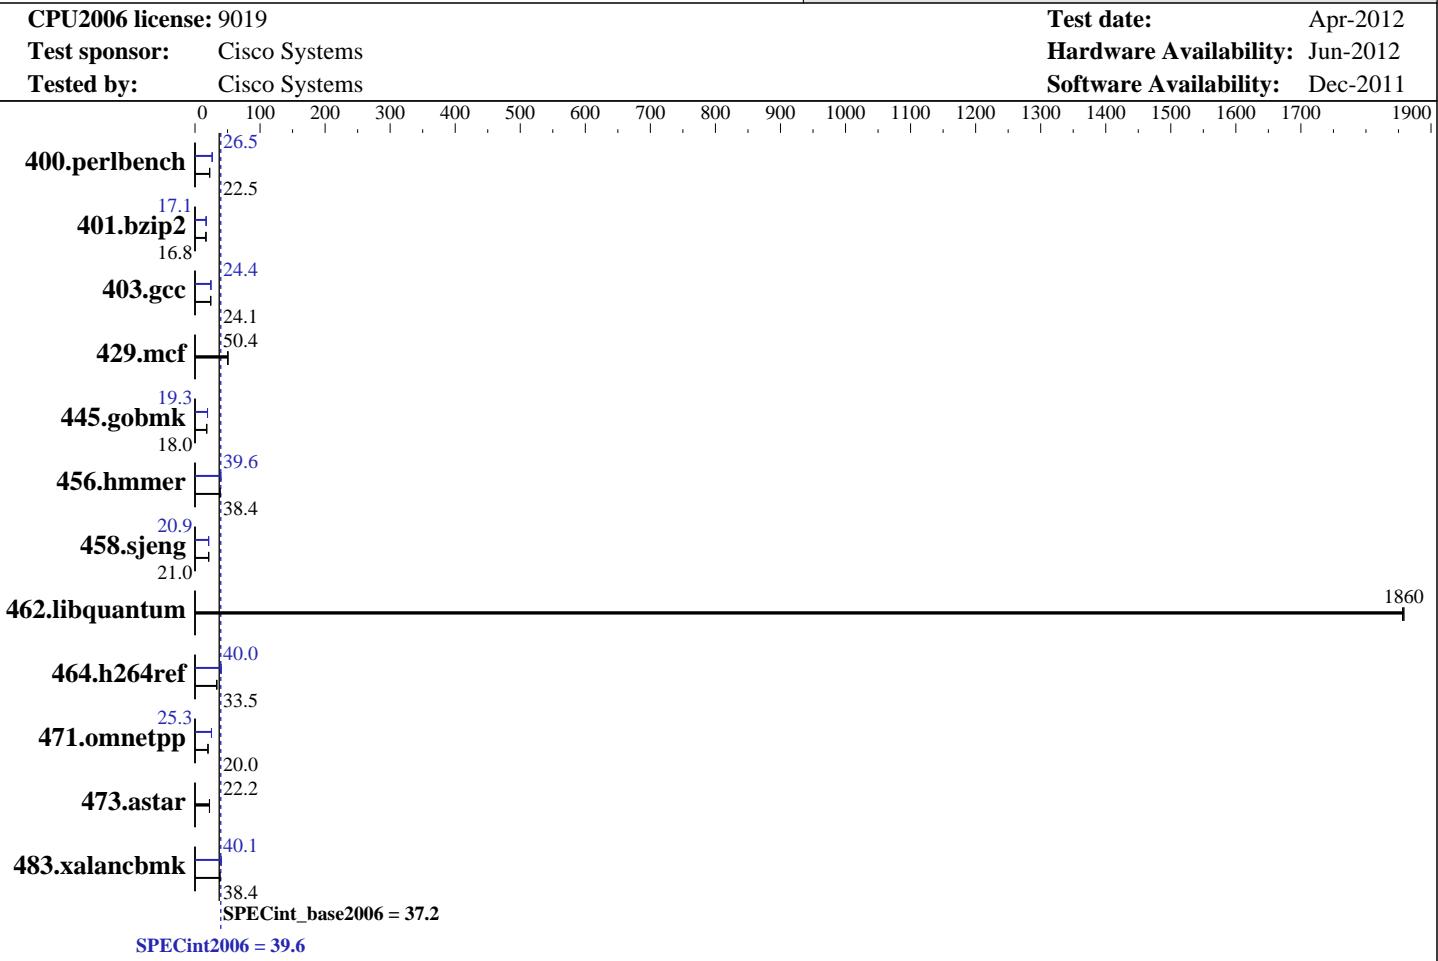

Hardware

CPU Name:	Intel Xeon E5-2620
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL7)
Disk Subsystem:	1 x 300 GB 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.0 GHz)

SPECint2006 = **39.6**

SPECint_base2006 = **37.2**

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	433	22.6	435	22.5	434	22.5	369	26.5	369	26.5	370	26.4
401.bzip2	575	16.8	574	16.8	574	16.8	563	17.1	563	17.1	564	17.1
403.gcc	334	24.1	333	24.2	333	24.1	329	24.5	330	24.4	329	24.4
429.mcf	181	50.4	182	50.1	179	50.9	181	50.4	182	50.1	179	50.9
445.gobmk	583	18.0	583	18.0	584	18.0	545	19.3	545	19.3	545	19.2
456.hmmer	243	38.3	242	38.5	243	38.4	236	39.6	236	39.6	236	39.6
458 sjeng	576	21.0	576	21.0	576	21.0	578	20.9	578	20.9	577	21.0
462.libquantum	11.2	1860	11.2	1860	11.1	1860	11.2	1860	11.2	1860	11.1	1860
464.h264ref	661	33.5	664	33.3	660	33.5	552	40.1	554	40.0	553	40.0
471.omnetpp	314	19.9	313	20.0	313	20.0	247	25.3	246	25.4	247	25.3
473.astar	316	22.2	316	22.2	314	22.3	316	22.2	316	22.2	314	22.3
483.xalancbmk	183	37.8	179	38.4	180	38.4	172	40.2	172	40.0	172	40.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Intel(R) Hyper-Threading Technology set to Disabled

Processor Power State C6 set to Disabled

Processor Power State C1 Enhanced set to Disabled

Power Technology set to Custom

Energy Performance set to Performance

DRAM Clock Throttling set to Performance

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3

running on speccpu-rhel6.2 Sun Apr 1 13:07:00 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.0 GHz)

SPECint2006 = 39.6

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Platform Notes (Continued)

```
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 kB

From /proc/meminfo
MemTotal:      132103120 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux speccpu-rhel6.2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 1 13:05

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/sda2        ext4   274G   10G  250G   4%  /
Additional information from dmidecode:
Memory:
 16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 2 X Intel Xeon E5-2620 CPU + 128 GB memory using RHEL 6.2
Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.0 GHz)

SPECint2006 = 39.6

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.0 GHz)

SPECint2006 = 39.6

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hammer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.0 GHz)

SPECint2006 = 39.6

CPU2006 license: 9019

Test date: Apr-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 07:58:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 May 2012.