



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp[®]_rate2006 = 497

Sun Fire X4270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate_base2006 = 461

CPU2006 license: 6


Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

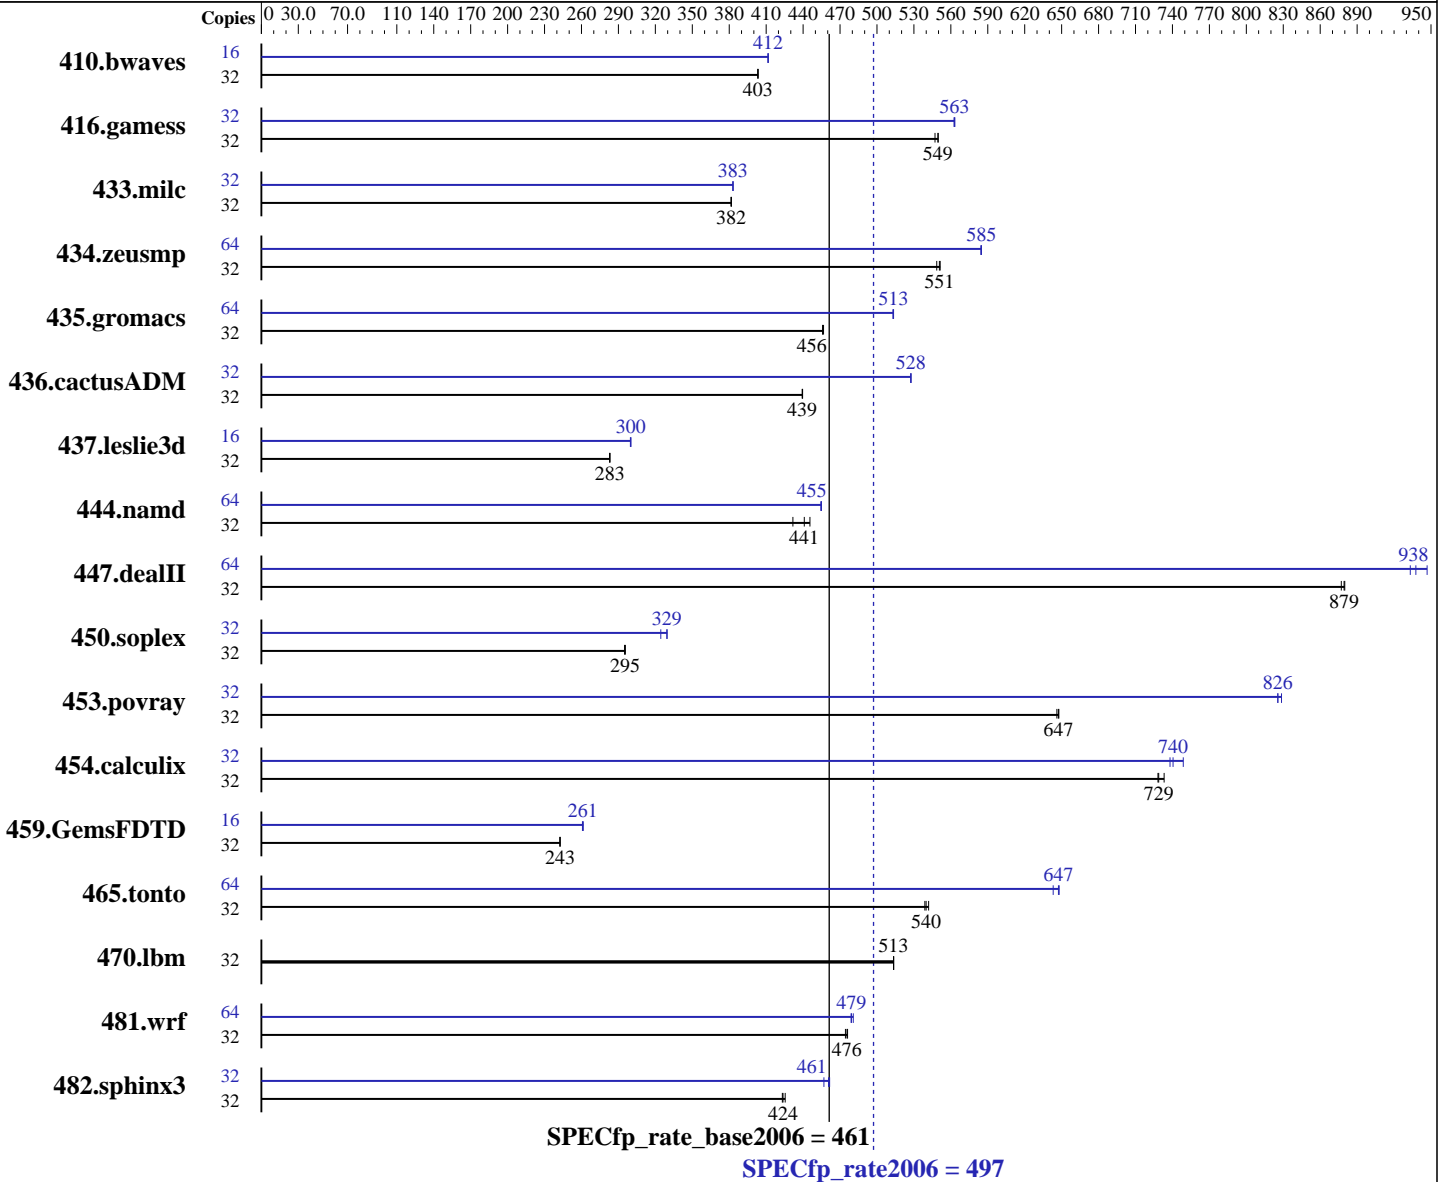

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Solaris 11 11/11 (SRU 03)
 Compiler: C/C++/Fortran: Version 12.3 of Oracle Solaris Studio (patch update 1, tested with nightly build 20120313)
 Auto Parallel: No
 File System: zfs
 System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 497

Sun Fire X4270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate_base2006 = 461

CPU2006 license: 6

Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 600 GB 10K RPM SAS
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1078	403	1078	403	<u>1078</u>	<u>403</u>	16	<u>528</u>	<u>412</u>	528	412	528	412
416.gamess	32	1145	547	1140	550	<u>1140</u>	<u>549</u>	32	<u>1113</u>	<u>563</u>	1112	563	1114	563
433.milc	32	769	382	<u>770</u>	<u>382</u>	770	382	32	<u>767</u>	<u>383</u>	767	383	767	383
434.zeusmp	32	531	549	<u>529</u>	<u>551</u>	528	551	64	997	584	996	585	<u>996</u>	<u>585</u>
435.gromacs	32	501	456	500	457	<u>501</u>	<u>456</u>	64	890	513	891	513	<u>890</u>	<u>513</u>
436.cactusADM	32	870	440	870	439	<u>870</u>	<u>439</u>	32	725	527	725	528	<u>725</u>	<u>528</u>
437.leslie3d	32	<u>1063</u>	<u>283</u>	1063	283	1064	283	16	501	300	502	300	<u>501</u>	<u>300</u>
444.namd	32	<u>582</u>	<u>441</u>	594	432	576	446	64	<u>1128</u>	<u>455</u>	1130	454	1128	455
447.dealII	32	416	880	<u>416</u>	<u>879</u>	417	877	64	<u>781</u>	<u>938</u>	785	933	773	947
450.soplex	32	903	296	<u>904</u>	<u>295</u>	905	295	32	810	330	<u>811</u>	<u>329</u>	823	324
453.povray	32	263	646	263	648	<u>263</u>	<u>647</u>	32	206	826	205	829	<u>206</u>	<u>826</u>
454.calculix	32	<u>362</u>	<u>729</u>	363	728	360	733	32	<u>357</u>	<u>740</u>	353	749	358	738
459.GemsFDTD	32	<u>1400</u>	<u>243</u>	1400	242	1399	243	16	651	261	<u>650</u>	<u>261</u>	649	261
465.tonto	32	581	542	584	539	<u>583</u>	<u>540</u>	64	972	648	<u>973</u>	<u>647</u>	979	643
470.lbm	32	<u>856</u>	<u>513</u>	856	514	856	513	32	<u>856</u>	<u>513</u>	856	514	856	513
481.wrf	32	<u>752</u>	<u>476</u>	751	476	753	474	64	1492	479	<u>1492</u>	<u>479</u>	1487	481
482.sphinx3	32	1466	425	1474	423	<u>1472</u>	<u>424</u>	32	1351	462	<u>1354</u>	<u>461</u>	1365	457

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used to bind processes to CPU threads with pbind(1)

Operating System Notes

ulimit -s 10000 (shell): increases stack

```
/etc/system parameters
  autoup=1000
  zfs:zfs_arc_max=0x400000000
  zfs:zfs_arc_min=0x400000000
  ncsiz=0x10000
  lpg_alloc_prefer=1
```

gzip compression set using "zfs set compression=gzip <zfs-filesystem>"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 497

Sun Fire X4270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate_base2006 = 461

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2012

Hardware Availability: Apr-2012

Software Availability: Jun-2012

Platform Notes

Default BIOS Settings were used, except:
Energy Performance set to Performance

Oracle's Sun Fire X4270 M3 is now known as the Sun Server X3-2L.

```
Sysinfo program /export/home/gnana/cpu2006v1.2/Docs/sysinfo
: 6775 2011-08-16 #f7622badcf24e01c368b1db4377c
running on bur398-107 Sat Apr 7 02:52:39 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /usr/sbin/psrinfo -pv
Intel(r) Xeon(r) CPU E5-2690 0 @ 2.90GHz
x86 (GenuineIntel 206D7 family 6 model 45 step 7 clock 2900 MHz)
```

```
/usr/sbin/psrinfo -p: 2 chips
/usr/sbin/psrinfo -pv | grep "core has" | wc -l: 16 cores
/usr/sbin/psrinfo | wc -l: 32 threads
```

```
/usr/sbin/prtconf | grep "Memory size:": 131062 Megabytes
```

```
/etc/release:
```

```
Oracle Solaris 11 11/11 X86
```

```
uname -a:
SunOS bur398-107 5.11 11.0 i86pc i386 i86pc
```

```
disk: df -h
Filesystem      Size  Used Available Capacity  Mounted on
rpool/export/home 547G  17G      81G      17%  /export/home
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
OMP_NUM_THREADS = "1"

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 497

Sun Fire X4270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate_base2006 = 461

CPU2006 license: 6

Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

Base Compiler Invocation (Continued)

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-g -fast -xipo=2 -m64 -xalias_level=std

C++ benchmarks:

-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4

Fortran benchmarks:

-fast -xipo=2 -m64 -xpagesize=2M

Benchmarks using both Fortran and C:

-g -fast(cc) -xipo=2 -m64 -xalias_level=std -fast(f90)
-xpagesize=2M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 497

Sun Fire X4270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate_base2006 = 461

CPU2006 license: 6

Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Portability Flags

436.cactusADM: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_WORDS_LITTLEENDIAN

Peak Optimization Flags

C benchmarks:

433.milc: -g -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std

470.lbm: basepeak = yes

482.sphinx3: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=std -xunroll=6
-W2,-Aujam:notinners -lumem -lmvec

C++ benchmarks:

444.namd: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xO3
-xprefetch=no%auto -m64 -xpagesize=2M
-xalias_level=compatible -library=stlport4

447.dealIII: -fast -xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-library=stdcxx4 -xvector -xprefetch

450.soplex: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=compatible -library=stlport4
-m32 -qoption iropt -Rujam -qoption iropt -Rtile

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 497

Sun Fire X4270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate_base2006 = 461

CPU2006 license: 6

Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

```
453.povray: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xprefetch=no%auto
-xipo=2 -m64 -xpagesize=2M -xalias_level=compatible
-qoption iropt -Atile:skew=on -qoption iropt -Ainline:cs=700
-library=stlport4
```

Fortran benchmarks:

```
410.bwaves: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M
```

```
416.gamess: -fast -xipo=2 -m64 -xpagesize=2M -xunroll=1
-xvector=no%simd -xprefetch=no%auto
```

434.zeusmp: Same as 410.bwaves

```
437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
```

459.GemsFDTD: Same as 410.bwaves

```
465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xvector=lib -xalias -lbsdmalloc
```

Benchmarks using both Fortran and C:

```
435.gromacs: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64 -xpagesize=2M -fsimple=2
-Qoption ube -fsimple=3 -xvector=no%simd
```

```
436.cactusADM: -g -fast(cc) -fast(f90) -xipo=2 -m64 -xpagesize=2M
-lumem
```

```
454.calculix: -g -fast(cc) -fast(f90) -xipo=0 -m64 -xpagesize=2M
-xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
-Qoption ube -xprefetch_mult=24 -xunroll=2
```

```
481.wrf: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -m64
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.html

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.html



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp_rate2006 = 497

Sun Fire X4270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECfp_rate_base2006 = 461

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2012

Hardware Availability: Apr-2012

Software Availability: Jun-2012

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.xml

http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:57:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.