



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = **65.7**

Huawei BH622 V2 (Intel Xeon E5-2630L)

SPECfp_base2006 = **62.3**

CPU2006 license: 3175


Test date: Apr-2012

Test sponsor: Huawei

Hardware Availability: Mar-2012

Tested by: Huawei

Software Availability: Oct-2011

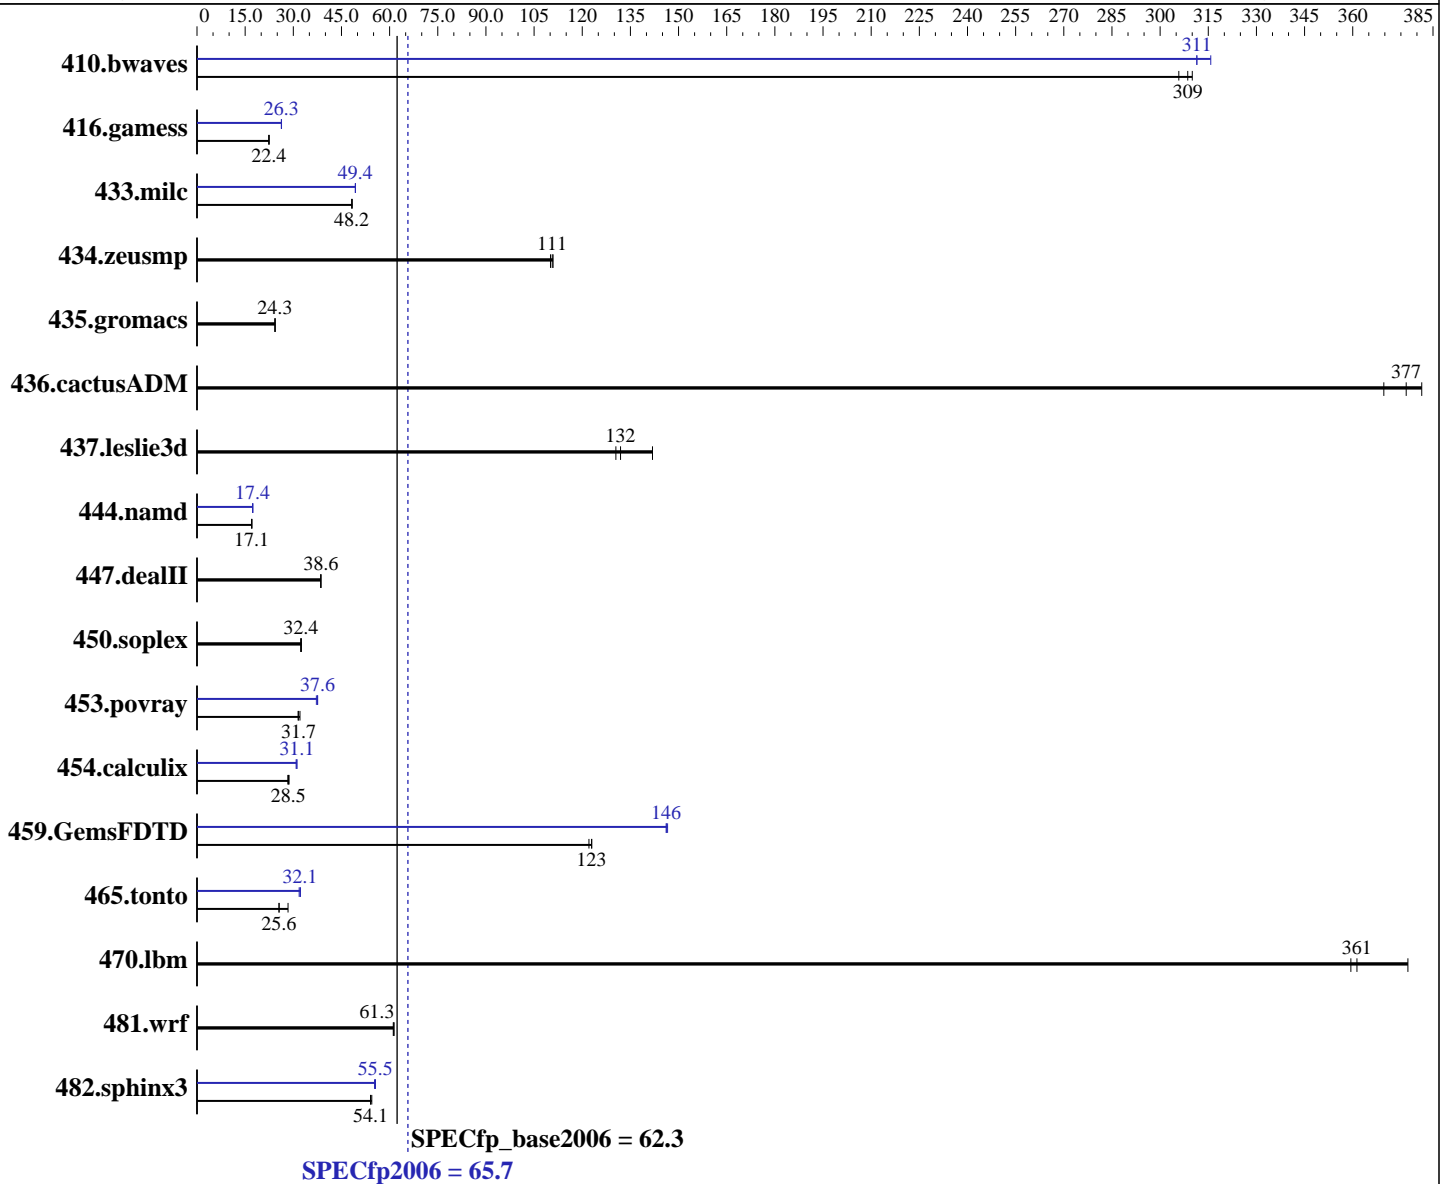

Hardware

CPU Name: Intel Xeon E5-2630L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)
 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **65.7**

Huawei BH622 V2 (Intel Xeon E5-2630L)

SPECfp_base2006 = **62.3**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	44.4	306	44.0	309	43.8	310	43.6	311	43.6	311	43.0	316
416.gamess	872	22.5	873	22.4	876	22.3	744	26.3	745	26.3	744	26.3
433.milc	190	48.2	190	48.2	190	48.3	186	49.4	186	49.3	186	49.4
434.zeusmp	82.2	111	82.6	110	82.0	111	82.2	111	82.6	110	82.0	111
435.gromacs	294	24.3	293	24.3	294	24.3	294	24.3	293	24.3	294	24.3
436.cactusADM	31.7	377	31.3	381	32.3	370	31.7	377	31.3	381	32.3	370
437.leslie3d	71.2	132	72.0	130	66.3	142	71.2	132	72.0	130	66.3	142
444.namd	470	17.1	470	17.1	470	17.1	462	17.3	462	17.4	462	17.4
447.dealII	297	38.6	297	38.6	296	38.6	297	38.6	297	38.6	296	38.6
450.soplex	258	32.4	258	32.3	256	32.5	258	32.4	258	32.3	256	32.5
453.povray	169	31.5	166	32.1	168	31.7	142	37.6	143	37.2	142	37.6
454.calculix	288	28.7	292	28.3	289	28.5	267	30.9	265	31.1	265	31.1
459.GemsFDTD	86.9	122	86.3	123	86.3	123	72.4	147	72.6	146	72.6	146
465.tonto	347	28.4	385	25.6	385	25.5	305	32.2	309	31.8	306	32.1
470.lbm	38.2	359	38.0	361	36.4	377	38.2	359	38.0	361	36.4	377
481.wrf	183	61.1	182	61.3	182	61.3	183	61.1	182	61.3	182	61.3
482.sphinx3	358	54.4	361	54.1	360	54.1	351	55.5	352	55.3	351	55.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Intel Hyper-Threading set to Disabled

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on BH622-SPEC Sun Apr 22 01:15:19 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 65.7

Huawei BH622 V2 (Intel Xeon E5-2630L)

SPECfp_base2006 = 62.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630L 0 @ 2.00GHz
 2 "physical id"s (chips)
12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 6
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      132133108 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux BH622-SPEC 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT
2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 22 00:49

```

SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext3      197G  9.0G  178G   5% /

```

Additional information from dmidecode:

```

Memory:
16x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

```

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "12"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 65.7

Huawei BH622 V2 (Intel Xeon E5-2630L)

SPECfp_base2006 = 62.3

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Oct-2011

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 65.7

Huawei BH622 V2 (Intel Xeon E5-2630L)

SPECfp_base2006 = 62.3

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Oct-2011

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 65.7

Huawei BH622 V2 (Intel Xeon E5-2630L)

SPECfp_base2006 = 62.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.20120509.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.20120509.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:52:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 May 2012.