SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX215 (Intel Xeon E5-2620)

SPECint®_rate2006 = 386

SPECint_rate_base2006 = 374

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

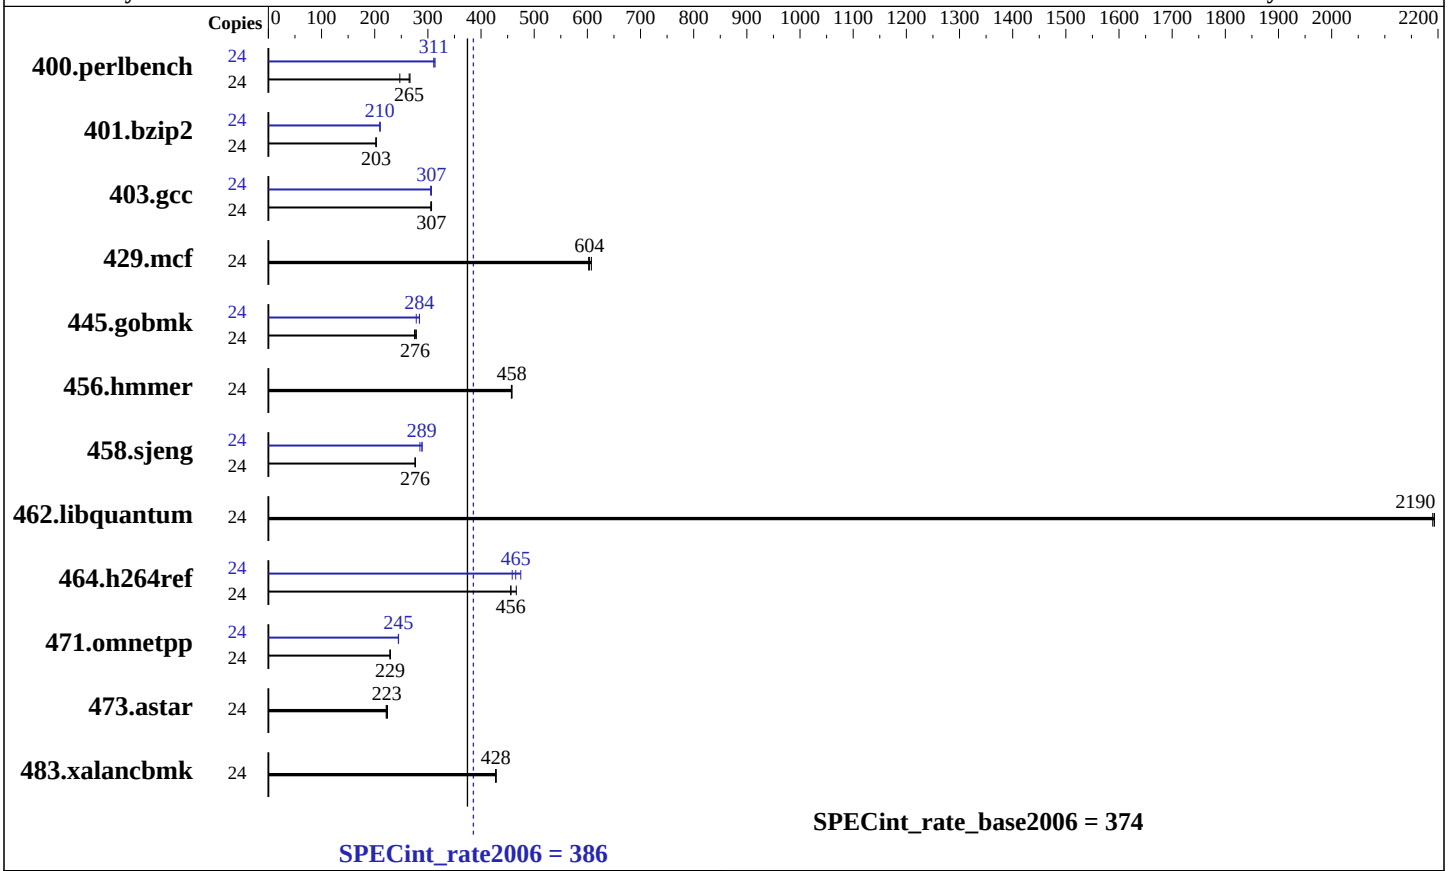

Hardware

CPU Name:	Intel Xeon E5-2620
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	500 GB, SATA-2, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX215 (Intel Xeon E5-2620)

SPECint_rate2006 = 386

SPECint_rate_base2006 = 374

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jun-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	880	266	**886**	**265**	948	247	24	748	314	753	311	**753**	**311**
401.bzip2	24	1144	202	**1143**	**203**	1142	203	24	1101	210	**1104**	**210**	1105	210
403.gcc	24	**630**	**307**	633	305	629	307	24	633	305	**630**	**307**	630	307
429.mcf	24	360	608	**362**	**604**	363	602	24	360	608	**362**	**604**	363	602
445.gobmk	24	904	278	916	275	**911**	**276**	24	905	278	**886**	**284**	886	284
456.hmmer	24	489	458	490	457	**489**	**458**	24	489	458	490	457	**489**	**458**
458.sjeng	24	1052	276	**1051**	**276**	1051	276	24	1004	289	**1006**	**289**	1019	285
462.libquantum	24	227	2190	**227**	**2190**	227	2190	24	227	2190	**227**	**2190**	227	2190
464.h264ref	24	1165	456	**1164**	**456**	1139	466	24	1119	475	1158	459	**1142**	**465**
471.omnetpp	24	654	229	656	229	**655**	**229**	24	613	245	612	245	**613**	**245**
473.astar	24	752	224	**757**	**223**	760	222	24	752	224	**757**	**223**	760	222
483.xalancbmk	24	386	428	387	427	**387**	**428**	24	386	428	387	427	**387**	**428**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

Platform Notes

```
Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ 8787f7622badcf24e01c368b1db4377c
running on localhost Thu Jun 14 19:56:00 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
     cache size : 15360 KB

  From /proc/meminfo
     MemTotal:       65918268 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.2 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jun 14 19:40

  SPEC is set to: /home/rcaneca/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/mapper/vg_it5rh-lv_home
                    ext4    193G  5.4G  178G   3% /home

  (End of data from sysinfo program)
```

General Notes

```
This result was measured on the Servidor Itautec MX215.
The Servidor Itautec MX215 and the Servidor Itautec MX225
are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias -auto-ilp32`

456.hmmer: `basepeak = yes`

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto-ilp32 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:38:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.