



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®2006 = 51.4

Express5800/R120d-2M (Intel Xeon E5-2643)

SPECint_base2006 = 48.4

CPU2006 license: 9006


Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

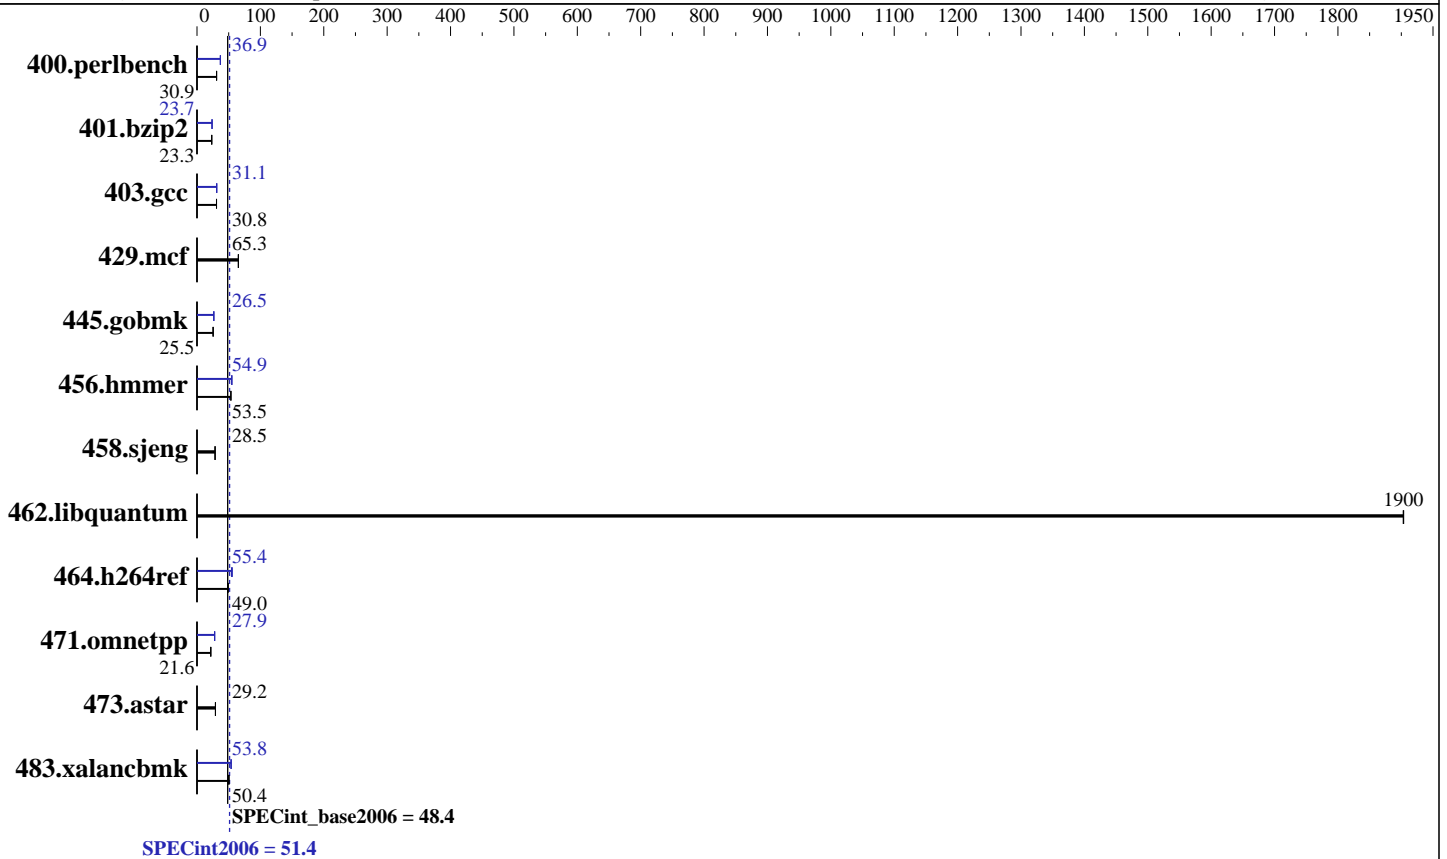

Hardware

CPU Name: Intel Xeon E5-2643
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = **51.4**

Express5800/R120d-2M (Intel Xeon E5-2643)

SPECint_base2006 = **48.4**

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	317	30.8	316	30.9	<u>316</u>	<u>30.9</u>	265	36.9	<u>265</u>	<u>36.9</u>	265	36.9
401.bzip2	<u>415</u>	<u>23.3</u>	415	23.3	416	23.2	407	23.7	405	23.9	<u>407</u>	<u>23.7</u>
403.gcc	<u>262</u>	<u>30.8</u>	261	30.9	262	30.7	259	31.1	<u>259</u>	<u>31.1</u>	259	31.1
429.mcf	139	65.4	140	65.2	<u>140</u>	<u>65.3</u>	139	65.4	140	65.2	<u>140</u>	<u>65.3</u>
445.gobmk	<u>412</u>	<u>25.5</u>	412	25.4	412	25.5	395	26.5	395	26.5	<u>395</u>	<u>26.5</u>
456.hammer	<u>174</u>	<u>53.5</u>	174	53.5	175	53.4	170	54.9	<u>170</u>	<u>54.9</u>	170	54.9
458.sjeng	424	28.5	424	28.5	<u>424</u>	<u>28.5</u>	424	28.5	424	28.5	<u>424</u>	<u>28.5</u>
462.libquantum	10.9	1900	10.9	1900	<u>10.9</u>	<u>1900</u>	10.9	1900	10.9	1900	<u>10.9</u>	<u>1900</u>
464.h264ref	450	49.1	<u>452</u>	<u>49.0</u>	452	49.0	407	54.4	399	55.5	<u>399</u>	<u>55.4</u>
471.omnetpp	285	22.0	290	21.6	<u>289</u>	<u>21.6</u>	224	27.9	225	27.8	<u>224</u>	<u>27.9</u>
473.astar	241	29.2	242	29.0	<u>241</u>	<u>29.2</u>	241	29.2	242	29.0	<u>241</u>	<u>29.2</u>
483.xalancbmk	139	49.7	<u>137</u>	<u>50.4</u>	136	50.7	128	53.8	<u>128</u>	<u>53.8</u>	128	53.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance
Memory Voltage: 1.5 V

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
OMP_NUM_THREADS = "8"

Added glibc-static-2.12-1.47.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 51.4

Express5800/R120d-2M (Intel Xeon E5-2643)

SPECint_base2006 = 48.4

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 51.4

Express5800/R120d-2M (Intel Xeon E5-2643)

SPECint_base2006 = 48.4

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -ansi-alias

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 51.4

Express5800/R120d-2M (Intel Xeon E5-2643)

SPECint_base2006 = 48.4

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:41:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 July 2012.