



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®2006 = 44.6

PRIMERGY TX100 S3p, Intel Core i3-3220, 3.30 GHz

SPECint_base2006 = 42.3

CPU2006 license: 19


Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: Sep-2012

Tested by: Fujitsu

Software Availability: Feb-2012

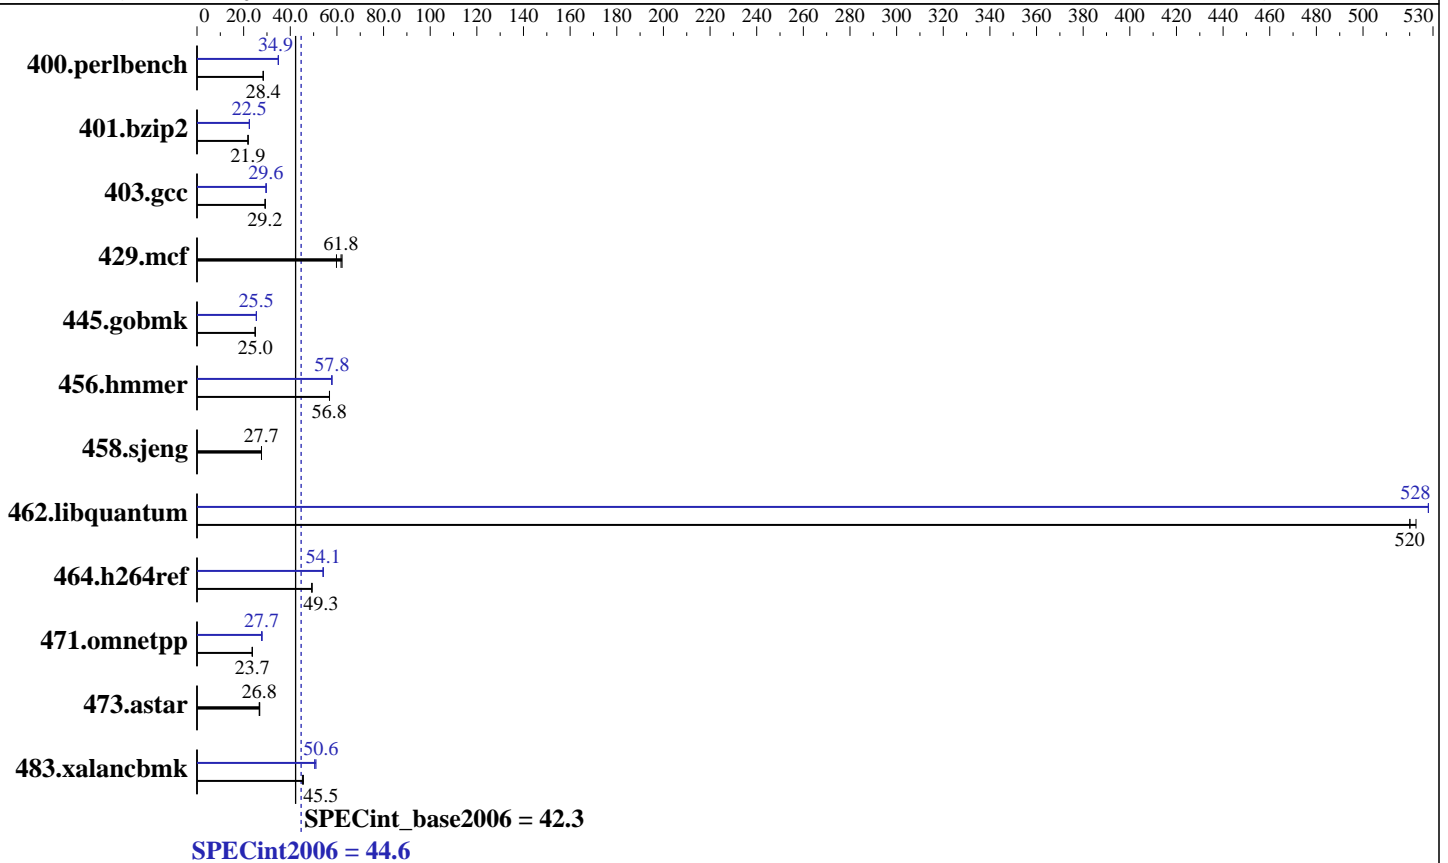

Hardware

CPU Name: Intel Core i3-3220
 CPU Characteristics:
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 44.6

PRIMERGY TX100 S3p, Intel Core i3-3220, 3.30 GHz

SPECint_base2006 = 42.3

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	344	28.4	344	28.4	344	28.4	280	34.9	280	34.9	280	34.8
401.bzip2	440	21.9	442	21.9	440	21.9	429	22.5	429	22.5	430	22.4
403.gcc	275	29.3	275	29.2	275	29.2	272	29.6	271	29.7	272	29.6
429.mcf	148	61.8	147	62.2	152	59.8	148	61.8	147	62.2	152	59.8
445.gobmk	420	25.0	420	25.0	421	24.9	412	25.5	412	25.5	412	25.5
456.hammer	164	56.8	164	56.8	164	56.8	161	57.8	161	57.8	161	57.8
458.sjeng	438	27.7	438	27.7	437	27.7	438	27.7	438	27.7	437	27.7
462.libquantum	39.8	520	39.6	523	39.8	520	39.2	528	39.2	528	39.2	528
464.h264ref	449	49.3	449	49.3	450	49.2	409	54.1	409	54.1	409	54.1
471.omnetpp	264	23.7	263	23.7	263	23.7	225	27.7	226	27.7	224	27.9
473.astar	261	26.9	262	26.8	263	26.7	261	26.9	262	26.8	263	26.7
483.xalancbmk	151	45.6	153	45.2	152	45.5	135	51.0	136	50.6	137	50.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Platform Notes

BIOS configuration:
Intel HT Technology = Disable

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"
OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x E3-1270v2 CPU + 32 GB
memory using RHEL6.2
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 44.6

PRIMERGY TX100 S3p, Intel Core i3-3220, 3.30 GHz

SPECint_base2006 = 42.3

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap/lib64 -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 44.6

PRIMERGY TX100 S3p, Intel Core i3-3220, 3.30 GHz

SPECint_base2006 = 42.3

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: Sep-2012

Tested by: Fujitsu

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -ansi-alias

458.sjeng: basepeak = yes

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
 -auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 44.6

PRIMERGY TX100 S3p, Intel Core i3-3220, 3.30 GHz

SPECint_base2006 = 42.3

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:59:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 October 2012.