



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 199

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55


Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

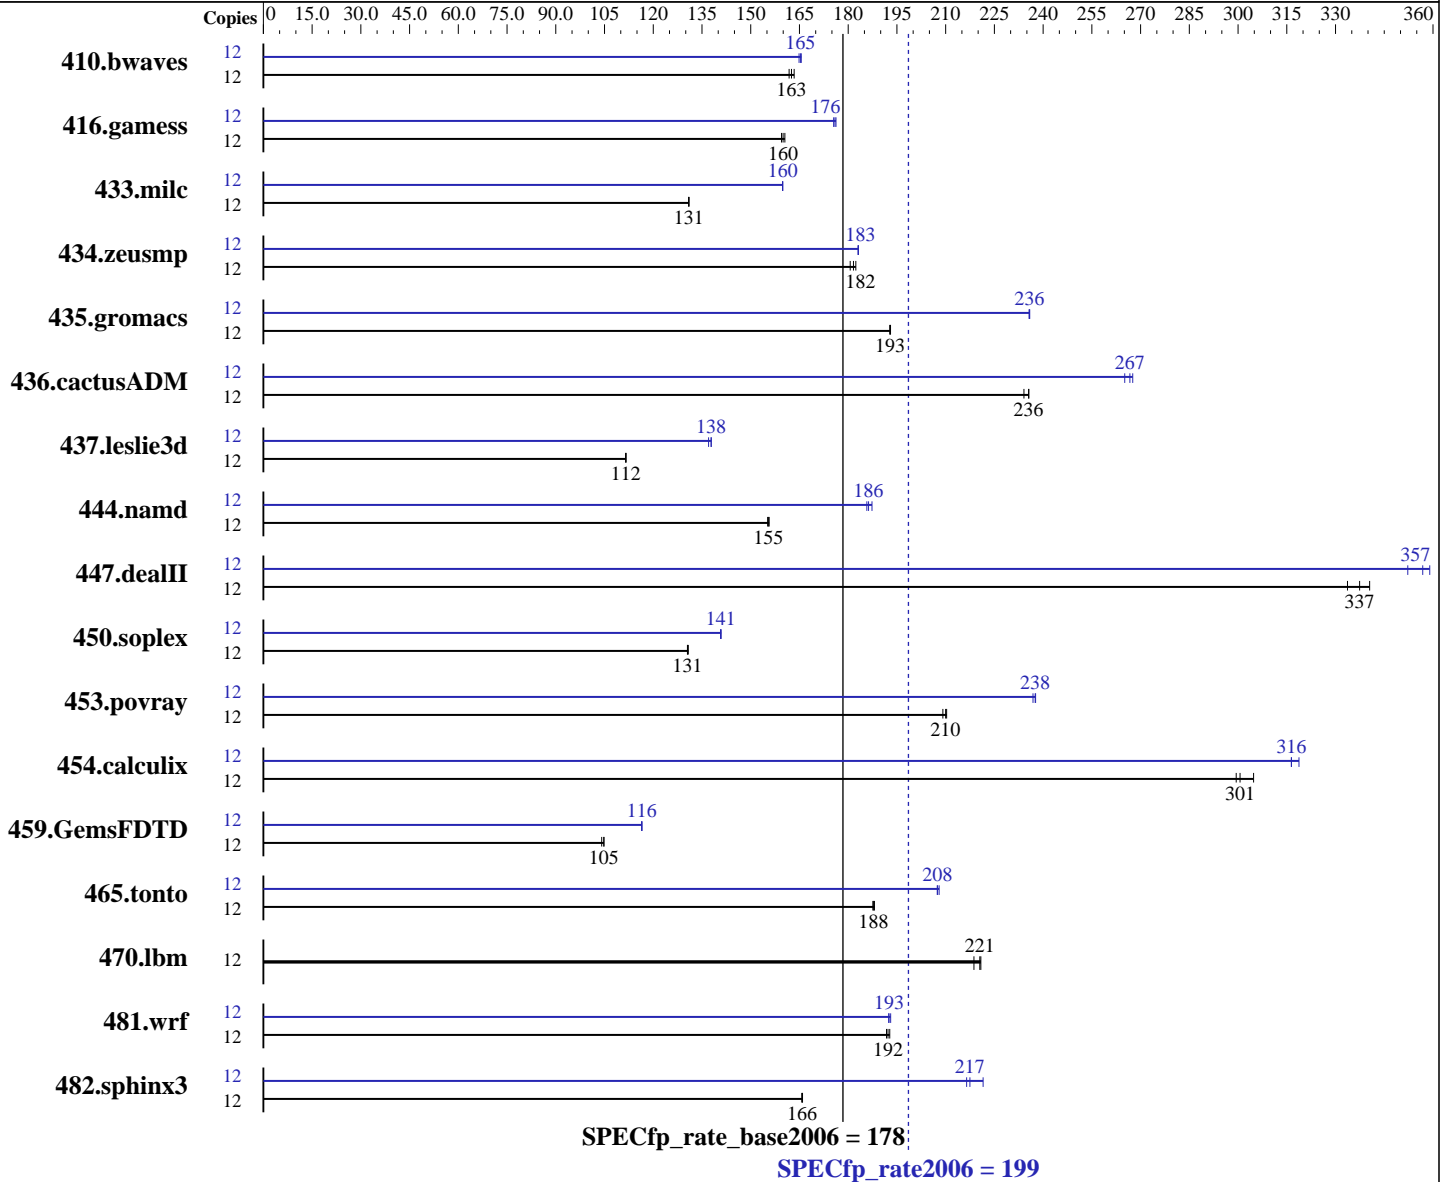

### Hardware

CPU Name: AMD Opteron 4334  
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 199

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Primary Cache: 192 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 6 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 8 MB I+D on chip per chip

Other Cache: None

Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 1 TB 7200 RPM SATA

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	12	998	163	<b>1003</b>	<b>163</b>	1008	162	12	989	165	985	166	<b>986</b>	<b>165</b>		
416.gamess	12	<b>1469</b>	<b>160</b>	1464	161	1473	159	12	1333	176	1339	176	<b>1336</b>	<b>176</b>		
433.milc	12	841	131	841	131	<b>841</b>	<b>131</b>	12	689	160	689	160	<b>689</b>	<b>160</b>		
434.zeusmp	12	605	181	<b>601</b>	<b>182</b>	599	182	12	<b>596</b>	<b>183</b>	596	183	596	183		
435.gromacs	12	444	193	<b>444</b>	<b>193</b>	444	193	12	363	236	<b>363</b>	<b>236</b>	364	236		
436.cactusADM	12	<b>609</b>	<b>236</b>	609	236	613	234	12	541	265	<b>538</b>	<b>267</b>	536	268		
437.leslie3d	12	1012	112	1011	112	<b>1011</b>	<b>112</b>	12	818	138	823	137	<b>819</b>	<b>138</b>		
444.namd	12	<b>619</b>	<b>155</b>	618	156	620	155	12	514	187	518	186	<b>517</b>	<b>186</b>		
447.dealII	12	403	341	<b>407</b>	<b>337</b>	411	334	12	390	352	382	359	<b>385</b>	<b>357</b>		
450.soplex	12	765	131	767	131	<b>766</b>	<b>131</b>	12	<b>711</b>	<b>141</b>	711	141	710	141		
453.povray	12	305	209	304	210	<b>304</b>	<b>210</b>	12	269	238	269	237	<b>269</b>	<b>238</b>		
454.calculix	12	325	305	331	299	<b>329</b>	<b>301</b>	12	311	319	<b>313</b>	<b>316</b>	313	316		
459.GemsFDTD	12	1214	105	<b>1215</b>	<b>105</b>	1223	104	12	1093	117	1094	116	<b>1093</b>	<b>116</b>		
465.tonto	12	628	188	629	188	<b>629</b>	<b>188</b>	12	569	207	<b>569</b>	<b>208</b>	568	208		
470.lbm	12	747	221	<b>748</b>	<b>221</b>	754	219	12	747	221	<b>748</b>	<b>221</b>	754	219		
481.wrf	12	<b>697</b>	<b>192</b>	699	192	695	193	12	<b>696</b>	<b>193</b>	694	193	696	192		
482.sphinx3	12	1409	166	<b>1410</b>	<b>166</b>	1411	166	12	1081	216	1056	222	<b>1075</b>	<b>217</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 199

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=5760 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "480"
```

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 199

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 199

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

```

470.lbm: basepeak = yes

```

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

```

```

447.deallI: -Ofast -D_OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

```

```

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 199

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

```
453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2
```

### Fortran benchmarks:

```
410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1
```

```
416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1
```

```
434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1
```

```
437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1
```

```
459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1
```

```
465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1
```

### Benchmarks using both Fortran and C:

```
435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3
```

```
436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1
```

```
454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
-march=bdver1
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 199

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECfp\_rate\_base2006 = 178

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:15:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.