



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint®2006 = 55.5**

### Huawei RH1288 V2 (Intel Xeon E5-2680)

**SPECint\_base2006 = 51.1**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Dec-2011

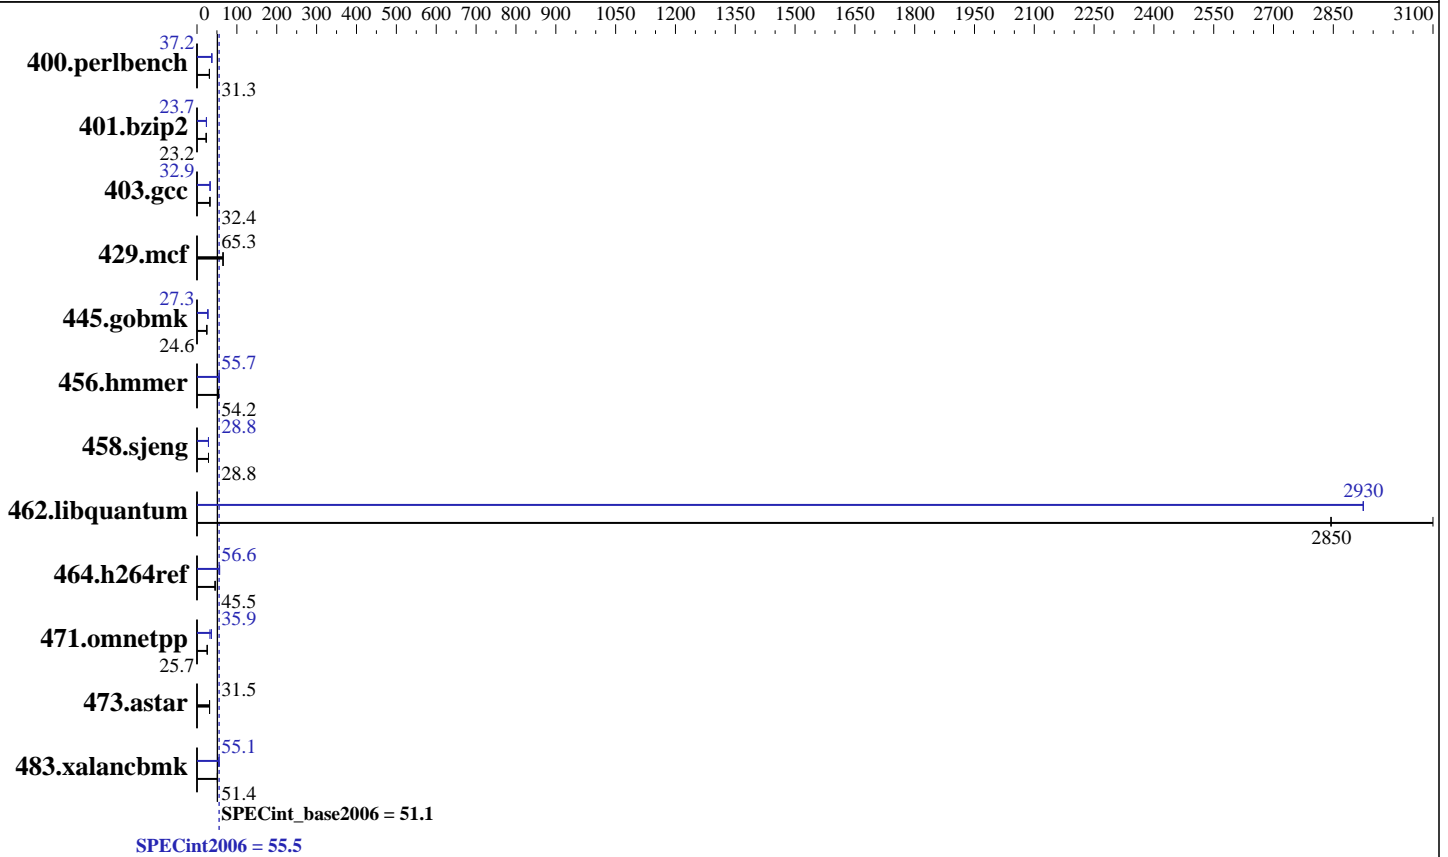

### Hardware

CPU Name: Intel Xeon E5-2680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint2006 = **55.5**

## Huawei RH1288 V2 (Intel Xeon E5-2680)

SPECint\_base2006 = **51.1**

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Apr-2013  
Hardware Availability: May-2012  
Software Availability: Dec-2011

### Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	316	30.9	<b><u>312</u></b>	<b><u>31.3</u></b>	312	31.3	264	37.0	263	37.2	<b><u>263</u></b>	<b><u>37.2</u></b>
401.bzip2	419	23.0	<b><u>416</u></b>	<b><u>23.2</u></b>	416	23.2	<b><u>408</u></b>	<b><u>23.7</u></b>	408	23.7	408	23.7
403.gcc	248	32.4	249	32.4	<b><u>248</u></b>	<b><u>32.4</u></b>	245	32.9	<b><u>245</u></b>	<b><u>32.9</u></b>	245	32.8
429.mcf	<b><u>140</u></b>	<b><u>65.3</u></b>	139	65.5	140	65.3	<b><u>140</u></b>	<b><u>65.3</u></b>	139	65.5	140	65.3
445.gobmk	427	24.6	427	24.6	<b><u>427</u></b>	<b><u>24.6</u></b>	<b><u>385</u></b>	<b><u>27.3</u></b>	385	27.2	385	27.3
456.hammer	<b><u>172</u></b>	<b><u>54.2</u></b>	172	54.2	172	54.1	169	55.2	<b><u>168</u></b>	<b><u>55.7</u></b>	167	55.8
458.sjeng	419	28.8	<b><u>420</u></b>	<b><u>28.8</u></b>	420	28.8	<b><u>420</u></b>	<b><u>28.8</u></b>	420	28.8	421	28.8
462.libquantum	6.68	3100	7.29	2840	<b><u>7.28</u></b>	<b><u>2850</u></b>	7.08	2920	<b><u>7.08</u></b>	<b><u>2930</u></b>	7.08	2930
464.h264ref	<b><u>487</u></b>	<b><u>45.5</u></b>	488	45.4	486	45.5	390	56.8	400	55.4	<b><u>391</u></b>	<b><u>56.6</u></b>
471.omnetpp	244	25.6	243	25.7	<b><u>243</u></b>	<b><u>25.7</u></b>	193	32.4	<b><u>174</u></b>	<b><u>35.9</u></b>	172	36.3
473.astar	224	31.4	222	31.6	<b><u>223</u></b>	<b><u>31.5</u></b>	224	31.4	222	31.6	<b><u>223</u></b>	<b><u>31.5</u></b>
483.xalancbmk	134	51.5	135	51.0	<b><u>134</u></b>	<b><u>51.4</u></b>	126	54.7	125	55.4	<b><u>125</u></b>	<b><u>55.1</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
Select only test related files when installing the operating system

### Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on z-spectest Sun Apr 21 01:26:16 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 0 @ 2.70GHz
 2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECint2006 = 55.5**

**Huawei RH1288 V2 (Intel Xeon E5-2680)**

**SPECint\_base2006 = 51.1**

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** Apr-2013  
**Hardware Availability:** May-2012  
**Software Availability:** Dec-2011

## Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5 6 7  
cache size : 20480 KB

From /proc/meminfo  
MemTotal: 132118004 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/\*release\* /etc/\*version\*  
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:  
Linux z-spectest 2.6.32-279.el6.x86\_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Apr 21 01:19

SPEC is set to: /spec  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 ext4 289G 4.6G 270G 2% /

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory  
using RHEL 6.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 55.5

Huawei RH1288 V2 (Intel Xeon E5-2680)

SPECint\_base2006 = 51.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Dec-2011

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 55.5

Huawei RH1288 V2 (Intel Xeon E5-2680)

SPECint\_base2006 = 51.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
 -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
 -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch  
 -auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-ra-region-strategy=block -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 55.5

Huawei RH1288 V2 (Intel Xeon E5-2680)

SPECint\_base2006 = 51.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

471.omnetpp (continued):

-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:25:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 June 2013.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 6