



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,
Intel Xeon E5-2640, 2.50 GHz)

SPECint_rate2006 = 460

SPECint_rate_base2006 = 445

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2013

Hardware Availability: Mar-2012

Software Availability: Oct-2012

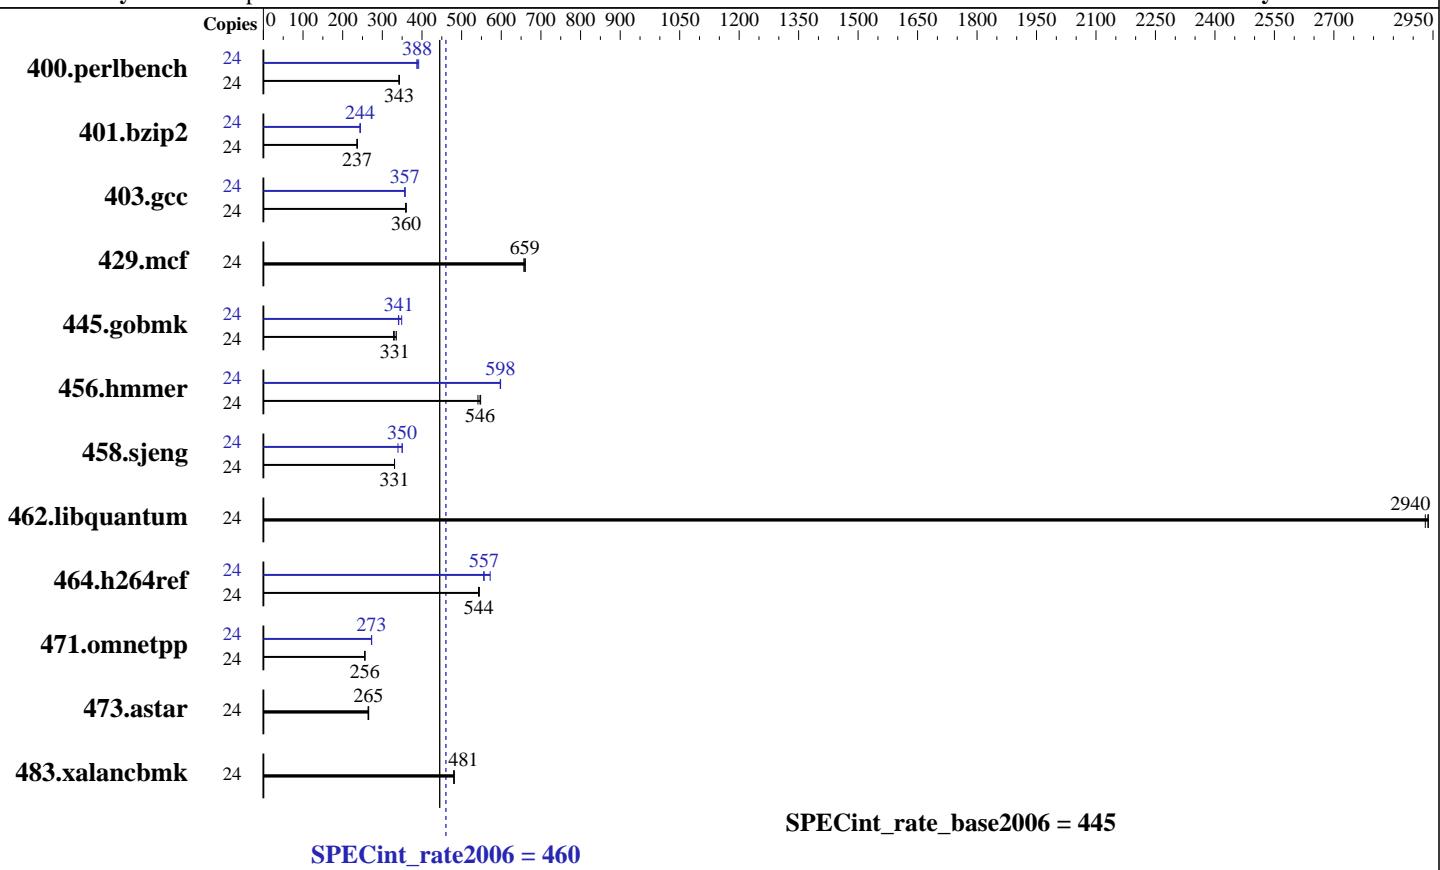

SPECint_rate2006 = 460

Software

Hardware	
CPU Name:	Intel Xeon E5-2640
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x 1 TB SATA II, 7200 RPM
Other Hardware:	None

Software	
Operating System:	Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,
Intel Xeon E5-2640, 2.50 GHz)

SPECint_rate2006 = 460

SPECint_rate_base2006 = 445

CPU2006 license: 001176

Test date: Apr-2013

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	684	343	684	343	686	342	24	599	392	606	387	604	388
401.bzip2	24	981	236	978	237	978	237	24	948	244	950	244	947	244
403.gcc	24	537	360	539	359	536	360	24	542	357	541	357	541	357
429.mcf	24	331	661	333	657	332	659	24	331	661	333	657	332	659
445.gobmk	24	767	328	751	335	760	331	24	739	341	737	341	722	349
456.hammer	24	409	548	410	546	414	541	24	375	597	374	598	374	598
458.sjeng	24	878	331	878	331	878	331	24	830	350	855	339	829	350
462.libquantum	24	170	2930	169	2940	169	2940	24	170	2930	169	2940	169	2940
464.h264ref	24	975	545	979	543	977	544	24	929	572	954	557	956	556
471.omnetpp	24	586	256	586	256	587	256	24	549	273	550	273	550	273
473.astar	24	634	266	636	265	638	264	24	634	266	636	265	638	264
483.xalancbmk	24	344	481	344	481	345	480	24	344	481	344	481	345	480

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,
Intel Xeon E5-2640, 2.50 GHz)

SPECint_rate2006 = 460

SPECint_rate_base2006 = 445

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2013

Hardware Availability: Mar-2012

Software Availability: Oct-2012

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,
Intel Xeon E5-2640, 2.50 GHz)

SPECint_rate2006 = 460

SPECint_rate_base2006 = 445

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2013

Hardware Availability: Mar-2012

Software Availability: Oct-2012

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,
Intel Xeon E5-2640, 2.50 GHz)

SPECint_rate2006 = 460

SPECint_rate_base2006 = 445

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2013

Hardware Availability: Mar-2012

Software Availability: Oct-2012

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:14:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 July 2013.