



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint®2006 = 43.2**

**SPECint\_base2006 = 40.5**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

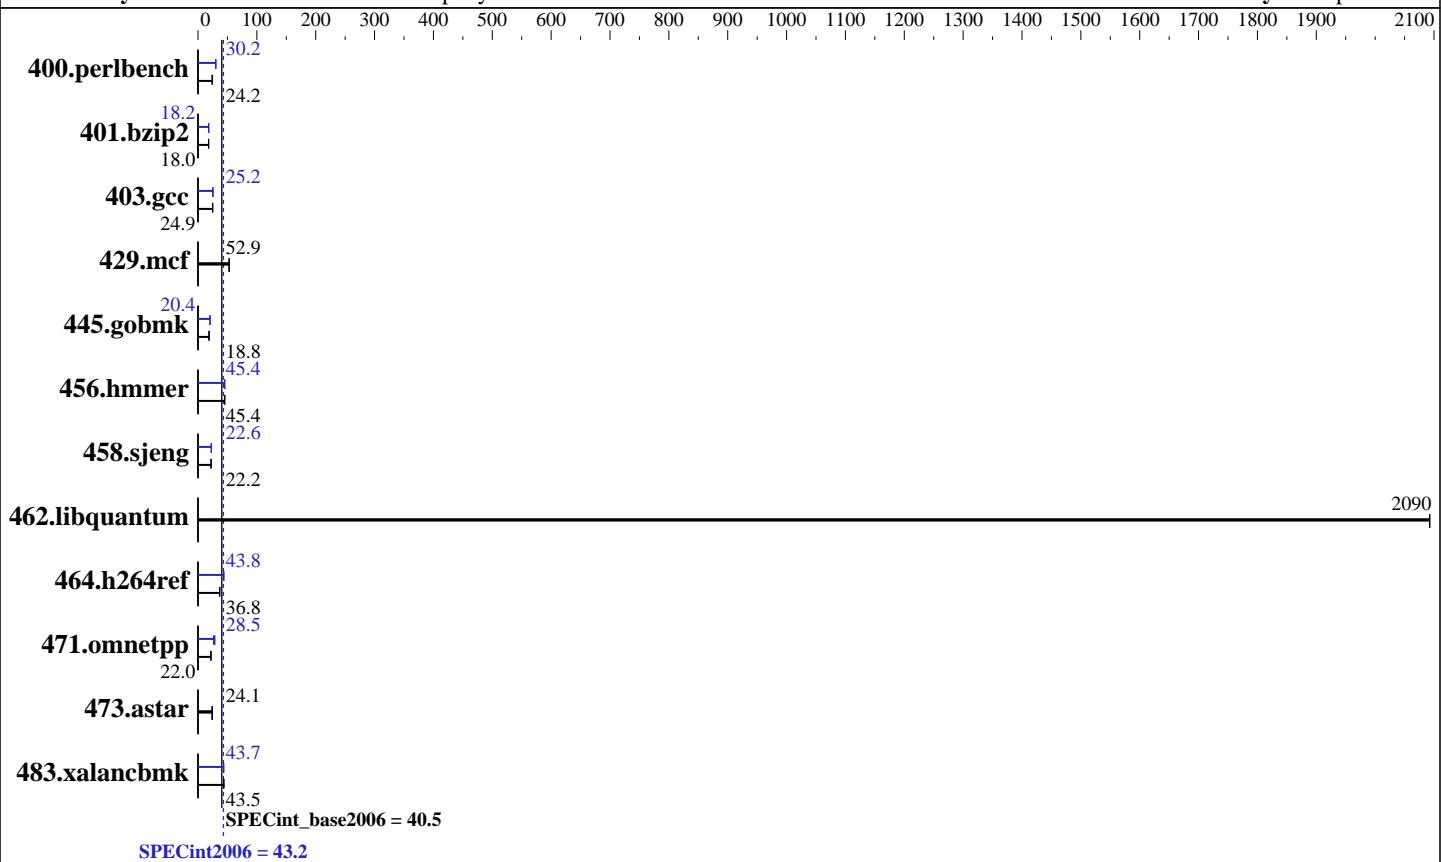

### Hardware

CPU Name: Intel Xeon E5-2620 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP3  
Compiler: Kernel 3.0.76-0.11-default  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: Yes  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint2006 = 43.2**

**SPECint\_base2006 = 40.5**

CPU2006 license: 3

Test date: Sep-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	404	24.2	<b>404</b>	<b>24.2</b>	405	24.1	323	30.2	324	30.2	<b>323</b>	<b>30.2</b>
401.bzip2	<b>535</b>	<b>18.0</b>	535	18.0	535	18.0	<b>530</b>	<b>18.2</b>	<b>531</b>	<b>18.2</b>	531	18.2
403.gcc	322	25.0	324	24.8	<b>323</b>	<b>24.9</b>	318	25.3	320	25.2	<b>319</b>	<b>25.2</b>
429.mcf	172	52.9	<b>172</b>	<b>52.9</b>	172	52.9	172	52.9	<b>172</b>	<b>52.9</b>	172	52.9
445.gobmk	558	18.8	<b>559</b>	<b>18.8</b>	559	18.8	<b>515</b>	<b>20.4</b>	515	20.4	514	20.4
456.hmmer	205	45.4	<b>206</b>	<b>45.4</b>	206	45.4	<b>206</b>	<b>45.4</b>	206	45.3	<b>206</b>	<b>45.4</b>
458.sjeng	545	22.2	545	22.2	<b>545</b>	<b>22.2</b>	535	22.6	535	22.6	<b>535</b>	<b>22.6</b>
462.libquantum	9.90	2090	<b>9.90</b>	<b>2090</b>	9.90	2090	9.90	2090	<b>9.90</b>	<b>2090</b>	9.90	2090
464.h264ref	601	36.8	598	37.0	<b>601</b>	<b>36.8</b>	<b>505</b>	<b>43.8</b>	506	43.7	505	43.8
471.omnetpp	283	22.1	285	21.9	<b>285</b>	<b>22.0</b>	<b>220</b>	<b>28.5</b>	219	28.5	238	26.3
473.astar	<b>292</b>	<b>24.1</b>	292	24.1	292	24.0	<b>292</b>	<b>24.1</b>	292	24.1	292	24.0
483.xalancbmk	159	43.3	156	44.4	<b>159</b>	<b>43.5</b>	158	43.7	<b>158</b>	<b>43.7</b>	159	43.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Disabled unused Linux services through "stop\_services.sh" before running.

## Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance

Memory Power Savings Mode set to Maximum Performance

Collaborative Power Control set to Disabled

Dynamic Power Capping Functionality set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x

Intel HyperThreading Options set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191

running on dl360p-gen8-sles11 Mon Sep 30 11:31:15 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint2006 = 43.2**

**SPECint\_base2006 = 40.5**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz
        2 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 6
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132130192 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux dl360p-gen8-sles11 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC
2013 (ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 30 11:08 last=S
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext3  365G  8.9G  338G   3%  /
```

Additional information from dmidecode:

```
BIOS HP P71 09/08/2013
Memory:
16x HP 689911-071 8 GB 1600 MHz
8x UNKNOWN NOT AVAILABLE
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of
memory is 128 GB and the dmidecode description should have one line reading as:
16x HP 689911-071 8 GB 1600 MHz



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint2006 = 43.2**

**SPECint\_base2006 = 40.5**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

  icc -m64

C++ benchmarks:

  icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
  -Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint2006 = 43.2**

**SPECint\_base2006 = 40.5**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Base Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint2006 = 43.2**

**SPECint\_base2006 = 40.5**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hummer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(2.10 GHz, Intel Xeon E5-2620 v2)

**SPECint2006 = 43.2**

**SPECint\_base2006 = 40.5**

**CPU2006 license:** 3

**Test date:** Sep-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:01:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 October 2013.