



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]2006 = 66.6

PRIMERGY TX300 S8, Intel Xeon E5-2609 v2, 2.50 GHz

SPECfp_base2006 = 64.7

CPU2006 license: 19


Test date: Sep-2013

Test sponsor: Fujitsu

Hardware Availability: Oct-2013

Tested by: Fujitsu

Software Availability: Sep-2013

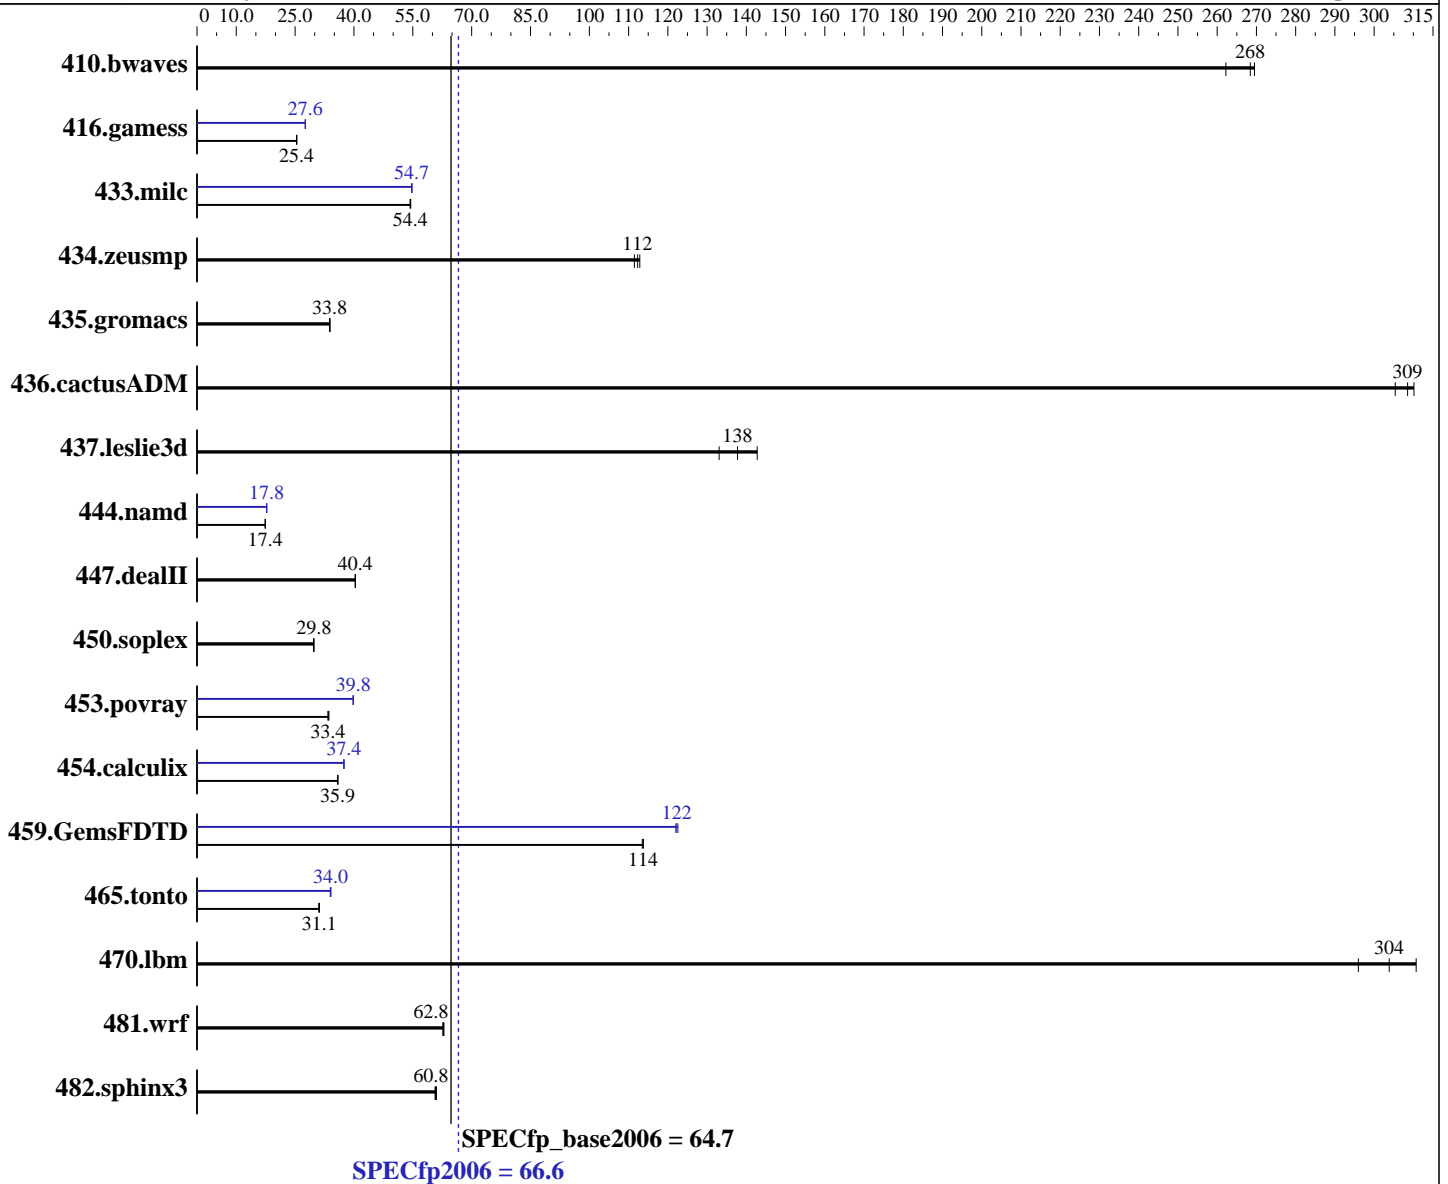

Hardware

CPU Name: Intel Xeon E5-2609 v2
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.11.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = **66.6**

PRIMERGY TX300 S8, Intel Xeon E5-2609 v2, 2.50 GHz

SPECfp_base2006 = **64.7**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 x SATA, 450 GB, 15000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	51.8	262	50.4	269	50.6	268	51.8	262	50.4	269	50.6	268
416.gamess	770	25.4	771	25.4	771	25.4	709	27.6	709	27.6	709	27.6
433.milc	169	54.3	169	54.4	169	54.5	168	54.7	168	54.8	168	54.7
434.zeusmp	80.6	113	81.6	111	81.0	112	80.6	113	81.6	111	81.0	112
435.gromacs	211	33.8	211	33.9	211	33.8	211	33.8	211	33.9	211	33.8
436.cactusADM	39.1	305	38.5	310	38.7	309	39.1	305	38.5	310	38.7	309
437.leslie3d	70.6	133	65.8	143	68.2	138	70.6	133	65.8	143	68.2	138
444.namd	460	17.4	461	17.4	461	17.4	452	17.8	452	17.8	451	17.8
447.dealII	283	40.4	284	40.3	284	40.4	283	40.4	284	40.3	284	40.4
450.soplex	280	29.8	280	29.8	281	29.7	280	29.8	280	29.8	281	29.7
453.povray	159	33.4	159	33.4	158	33.6	133	39.9	134	39.8	134	39.8
454.calculix	230	35.9	230	35.9	230	35.9	220	37.4	220	37.5	220	37.4
459.GemsFDTD	93.3	114	93.5	113	93.3	114	86.6	123	86.8	122	87.0	122
465.tonto	316	31.1	317	31.0	315	31.2	289	34.0	288	34.2	290	34.0
470.lbm	46.4	296	44.2	311	45.2	304	46.4	296	44.2	311	45.2	304
481.wrf	178	62.7	178	62.8	177	62.9	178	62.7	178	62.8	177	62.9
482.sphinx3	319	61.0	321	60.7	321	60.8	319	61.0	321	60.7	321	60.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Energy Performance = Performance
 Utilization Profile = Unbalanced



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 66.6

PRIMERGY TX300 S8, Intel Xeon E5-2609 v2, 2.50 GHz

SPECfp_base2006 = 64.7

CPU2006 license: 19

Test date: Sep-2013

Test sponsor: Fujitsu

Hardware Availability: Oct-2013

Tested by: Fujitsu

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

This result was measured on the PRIMERGY RX350 S8. The PRIMERGY RX350 S8 and the PRIMERGY TX300 S8 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 66.6

PRIMERGY TX300 S8, Intel Xeon E5-2609 v2, 2.50 GHz

SPECfp_base2006 = 64.7

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 66.6

PRIMERGY TX300 S8, Intel Xeon E5-2609 v2, 2.50 GHz

SPECfp_base2006 = 64.7

CPU2006 license: 19

Test date: Sep-2013

Test sponsor: Fujitsu

Hardware Availability: Oct-2013

Tested by: Fujitsu

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 66.6

PRIMERGY TX300 S8, Intel Xeon E5-2609 v2, 2.50 GHz

SPECfp_base2006 = 64.7

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 17:40:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 November 2013.