



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2630L v2, 2.40 GHz

SPECint®\_rate2006 = 460

SPECint\_rate\_base2006 = 443

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

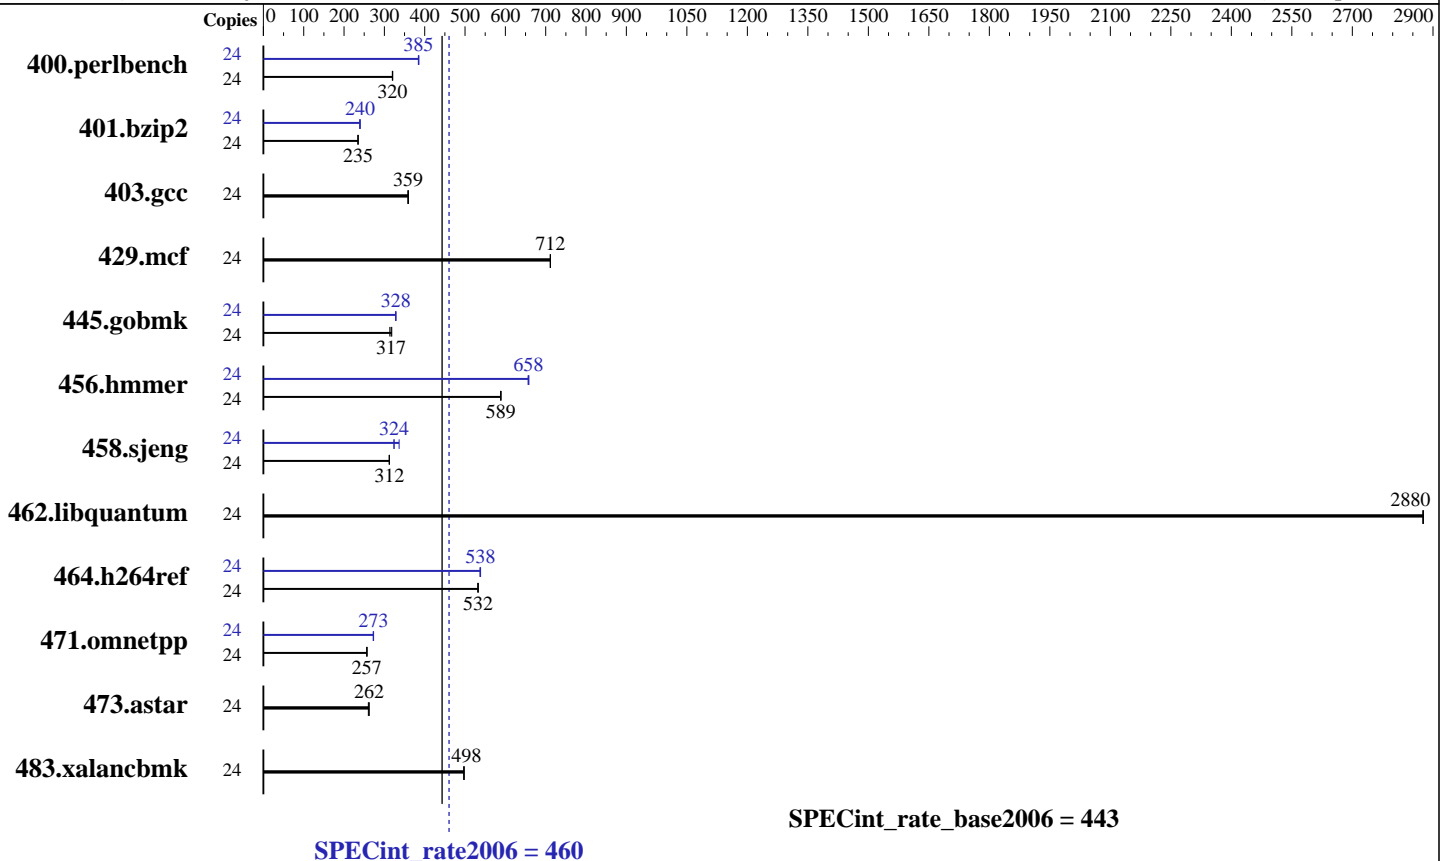

### Hardware

CPU Name: Intel Xeon E5-2630L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx8 PC3-14900R-13, ECC, running at 1600 MHz and CL11)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2630L v2, 2.40 GHz

SPECint\_rate2006 = 460

SPECint\_rate\_base2006 = 443

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Sep-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>733</b>	<b>320</b>	731	321	733	320	24	<b>610</b>	<b>385</b>	608	386	610	384
401.bzip2	24	985	235	<b>986</b>	<b>235</b>	989	234	24	965	240	<b>966</b>	<b>240</b>	970	239
403.gcc	24	539	358	537	360	<b>539</b>	<b>359</b>	24	539	358	537	360	<b>539</b>	<b>359</b>
429.mcf	24	308	711	<b>308</b>	<b>712</b>	308	712	24	308	711	<b>308</b>	<b>712</b>	308	712
445.gobmk	24	<b>795</b>	<b>317</b>	803	314	791	318	24	768	328	766	329	<b>766</b>	<b>328</b>
456.hammer	24	380	589	<b>380</b>	<b>589</b>	381	588	24	<b>341</b>	<b>658</b>	340	658	341	656
458.sjeng	24	931	312	929	313	<b>930</b>	<b>312</b>	24	<b>896</b>	<b>324</b>	863	337	897	324
462.libquantum	24	173	2870	173	2880	<b>173</b>	<b>2880</b>	24	173	2870	173	2880	<b>173</b>	<b>2880</b>
464.h264ref	24	<b>998</b>	<b>532</b>	997	533	999	532	24	986	539	989	537	<b>987</b>	<b>538</b>
471.omnetpp	24	585	256	584	257	<b>585</b>	<b>257</b>	24	551	272	<b>550</b>	<b>273</b>	549	273
473.astar	24	<b>643</b>	<b>262</b>	647	260	643	262	24	<b>643</b>	<b>262</b>	647	260	643	262
483.xalancbmk	24	<b>333</b>	<b>498</b>	333	497	333	498	24	<b>333</b>	<b>498</b>	333	497	333	498

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX250 S2, Intel Xeon E5-2630L v2, 2.40 GHz

**SPECint\_rate2006 = 460**

**SPECint\_rate\_base2006 = 443**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY CX250 S2, Intel Xeon E5-2630L v2, 2.40 GHz

**SPECint\_rate2006 = 460**

**SPECint\_rate\_base2006 = 443**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll2 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2630L v2, 2.40 GHz

SPECint\_rate2006 = 460

SPECint\_rate\_base2006 = 443

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Sep-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:57:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2013.