



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M520 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint[®]_rate2006 = 185

SPECint_rate_base2006 = 179

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

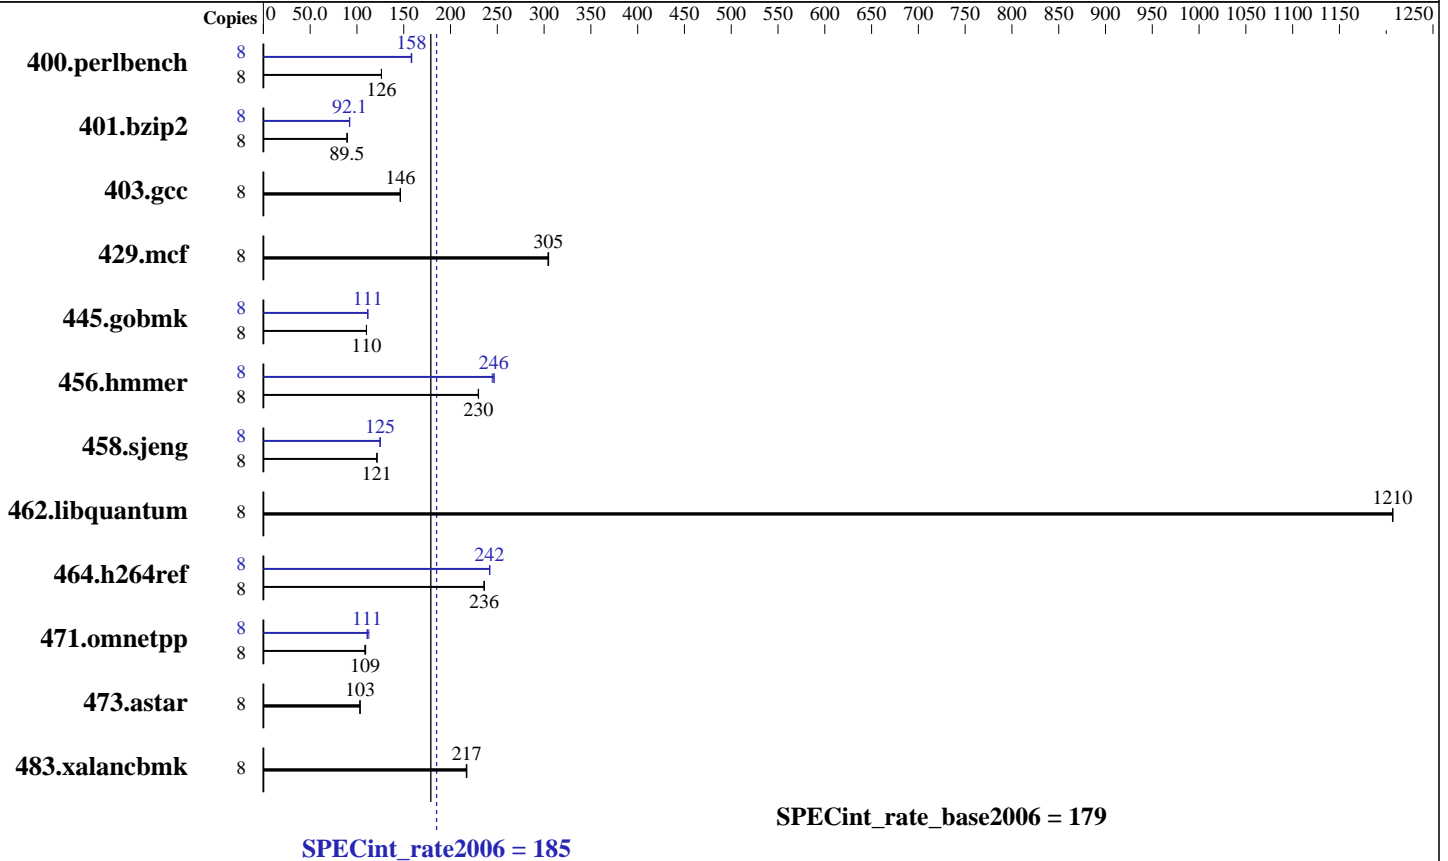

Hardware

CPU Name: Intel Xeon E5-2403 v2
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 1 TB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 185

PowerEdge M520 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate_base2006 = 179

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	619	126	619	126	620	126	8	494	158	495	158	493	159
401.bzip2	8	862	89.6	863	89.5	863	89.4	8	839	92.0	837	92.3	838	92.1
403.gcc	8	440	146	440	146	440	146	8	440	146	440	146	440	146
429.mcf	8	239	305	240	304	239	305	8	239	305	240	304	239	305
445.gobmk	8	762	110	761	110	762	110	8	751	112	753	111	753	111
456.hammer	8	325	230	325	230	325	230	8	303	246	305	245	303	247
458.sjeng	8	797	121	797	121	798	121	8	776	125	776	125	775	125
462.libquantum	8	137	1210	137	1210	137	1210	8	137	1210	137	1210	137	1210
464.h264ref	8	751	236	750	236	750	236	8	732	242	731	242	733	242
471.omnetpp	8	459	109	457	109	461	108	8	444	113	450	111	450	111
473.astar	8	544	103	544	103	544	103	8	544	103	544	103	544	103
483.xalancbmk	8	254	217	255	217	254	217	8	254	217	255	217	254	217

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Virtualization Technology disabled
Execute Disable disabled
Logical Processor enabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on linux Tue Dec 10 15:34:28 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2403 v2 @ 1.80GHz
2 "physical id"s (chips)
8 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 185

PowerEdge M520 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate_base2006 = 179

CPU2006 license: 55

Test date: Dec-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

From /proc/meminfo

```
MemTotal:      198443260 kB
HugePages_Total:    0
Hugepagesize:     2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

uname -a:

```
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 10 15:27 last=5

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  910G  11G  898G   2% /
```

Additional information from dmidecode:

```
BIOS Dell Inc. 2.0.22 09/23/2013
Memory:
12x 00AD04B300AD HMT42GR7AFR4A-PB 16 GB 1333 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org
http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 185

PowerEdge M520 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate_base2006 = 179

CPU2006 license: 55

Test date: Dec-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M520 (Intel Xeon E5-2403 v2,
1.80 GHz)

SPECint_rate2006 = 185

SPECint_rate_base2006 = 179

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmr: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmr: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-unroll2 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 185

PowerEdge M520 (Intel Xeon E5-2403 v2, 1.80 GHz)

SPECint_rate_base2006 = 179

CPU2006 license: 55

Test date: Dec-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:53:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 January 2014.