



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S4, Intel Xeon E5-2450L v2, 1.70 GHz

SPECint_rate2006 = 548

SPECint_rate_base2006 = 529

CPU2006 license: 19


Test date: Dec-2013

Test sponsor: Fujitsu

Hardware Availability: Jan-2014

Tested by: Fujitsu

Software Availability: Sep-2013

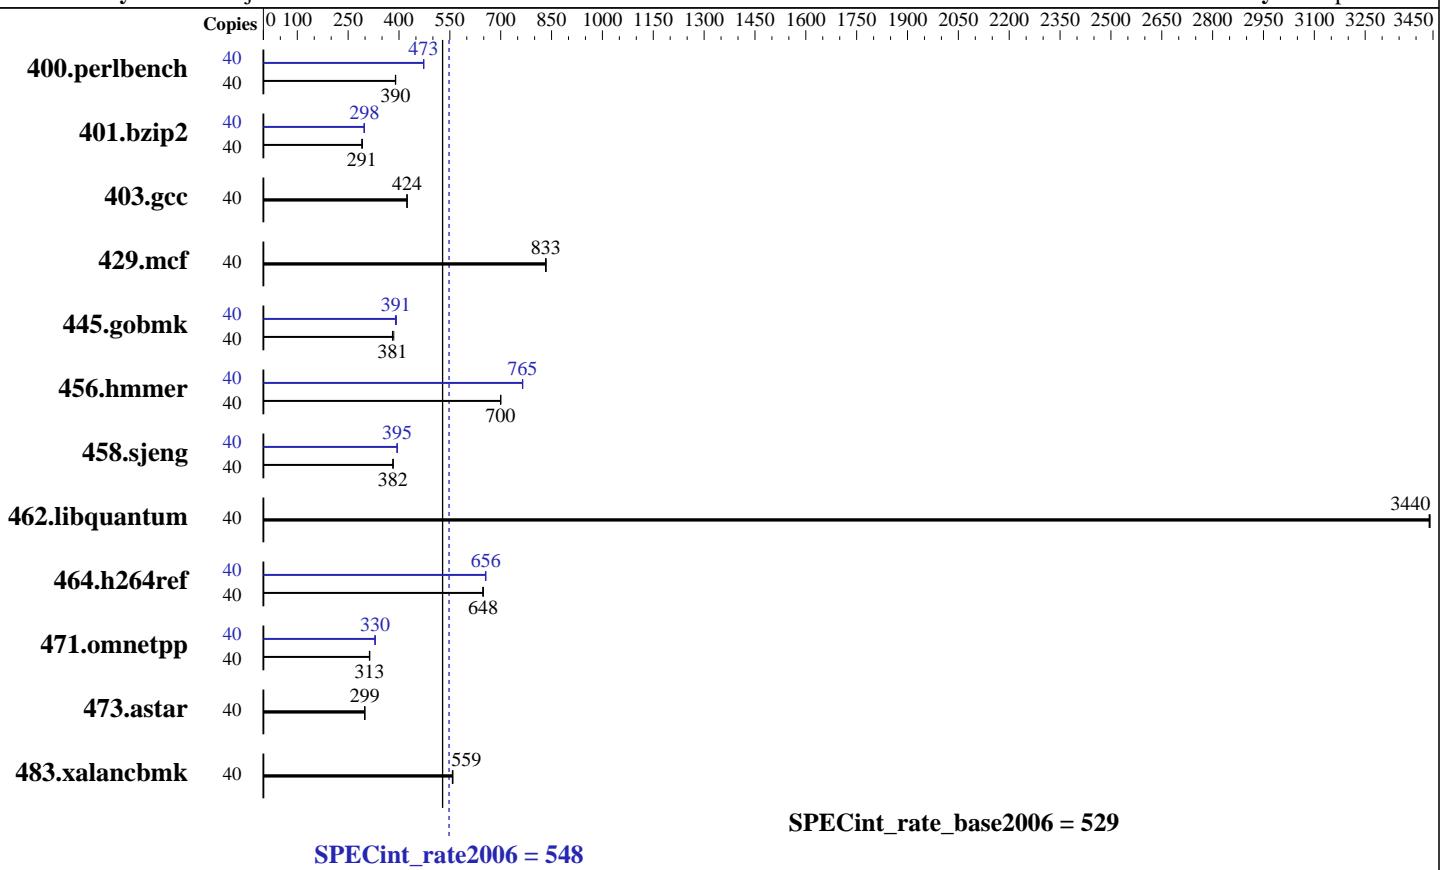

Hardware

CPU Name: Intel Xeon E5-2450L v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz
CPU MHz: 1700
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.11.1.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S4, Intel Xeon E5-2450L v2, 1.70 GHz

SPECint_rate2006 = 548

SPECint_rate_base2006 = 529

CPU2006 license: 19

Test date: Dec-2013

Test sponsor: Fujitsu

Hardware Availability: Jan-2014

Tested by: Fujitsu

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	1001	390	1002	390	1004	389	40	827	472	827	473	826	473
401.bzip2	40	1327	291	1320	292	1329	290	40	1302	296	1294	298	1294	298
403.gcc	40	760	424	759	424	760	423	40	760	424	759	424	760	423
429.mcf	40	438	832	438	833	437	834	40	438	832	438	833	437	834
445.gobmk	40	1091	385	1102	381	1101	381	40	1074	391	1070	392	1077	390
456.hammer	40	534	699	533	701	533	700	40	488	764	488	765	488	765
458.sjeng	40	1267	382	1264	383	1266	382	40	1228	394	1226	395	1225	395
462.libquantum	40	241	3440	241	3440	241	3440	40	241	3440	241	3440	241	3440
464.h264ref	40	1364	649	1366	648	1368	647	40	1349	656	1349	656	1351	655
471.omnetpp	40	797	314	798	313	800	313	40	758	330	760	329	758	330
473.astar	40	940	299	937	300	940	299	40	940	299	937	300	940	299
483.xalancbmk	40	494	559	494	559	495	557	40	494	559	494	559	495	557

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Energy Performance = Performance

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S4, Intel Xeon E5-2450L v2, 1.70 GHz

SPECint_rate2006 = 548

SPECint_rate_base2006 = 529

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

 icc -m32

C++ benchmarks:

 icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

 icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S4, Intel Xeon E5-2450L v2, 1.70 GHz

SPECint_rate2006 = 548

SPECint_rate_base2006 = 529

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S4, Intel Xeon E5-2450L v2, 1.70 GHz

SPECint_rate2006 = 548

SPECint_rate_base2006 = 529

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:24:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 February 2014.